
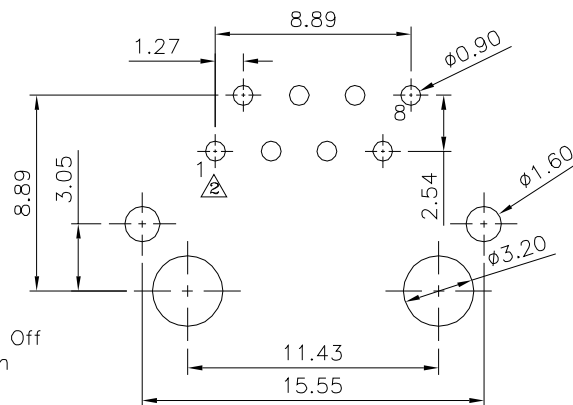
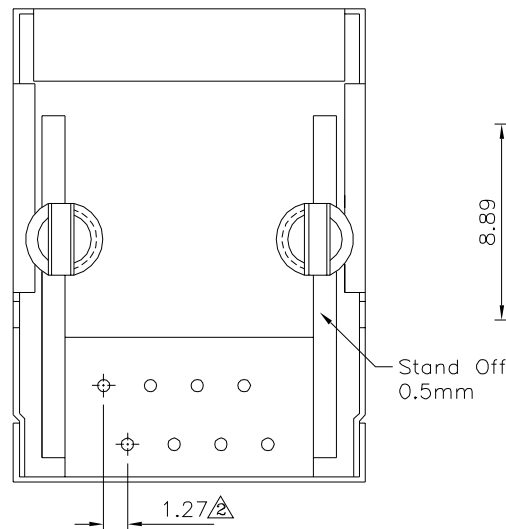
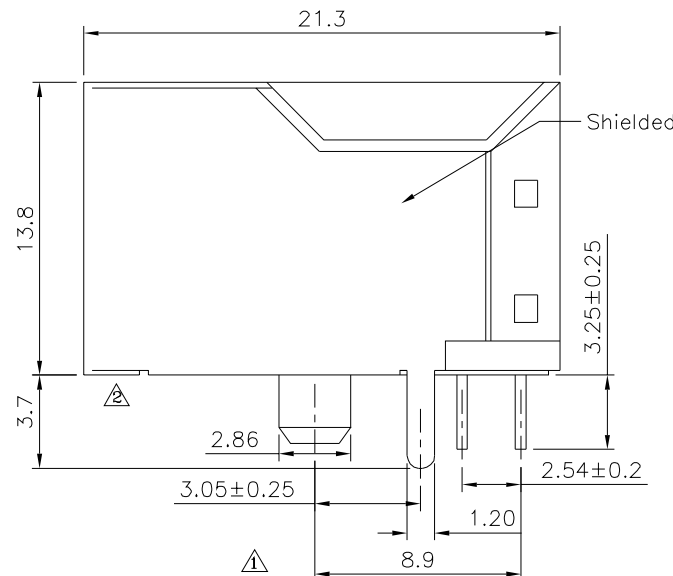


4 SPECIFICATION


Current Rating:1.5A Max.
Voltage Rating:150V AC Max.
Operating Temperature: -40°C~+85°C
Relative Humidity:70% ±10%RH
Insulation Resistance:500 Megaohms Min. Initial
At 500V DC
Contact Resistance:20 Milliohms Max. Initial
30 Milliohms Max. Final
Durability:750 Cycles
Dielectric Withstanding Voltage:
1000V RMS. At 60Hz,1 Minute Between
Adjacent Contacts
1500V RMS. At 60Hz,1 Minute Between
Shield And Contacts
Housing:PBT+G.F.(UL94V-0),Black
Contact:Phosphor Bronze Ø0.45mm

Contact Finish	Item No.
Gold Flash Over All,Over Nickel	12142
Gold Plated 6u" Over All,Over Nickel	20884

Shell:Brass,Nickel Plated
Cavity Conforms To FCC Rules And Regulations
Part 68,Subpart F.
RoHS Compliant

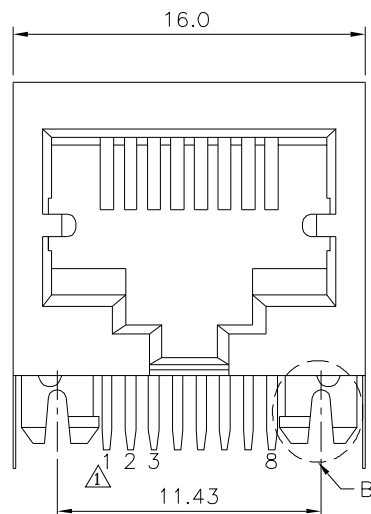

Recommended P.C.B. Layout

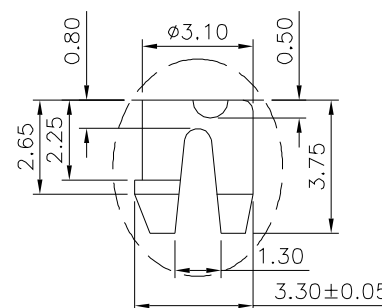

Detail B

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 1

20884

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.

A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.25
.XX ±0.13
.XXX ±0.05

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	06/13/2017
3	A3	Modify Data	HZF	09/24/2014
2	A2	Modify Data	HZF	07/23/2013
1	A1	Modify Data	HZF	01/28/2010
0	A0	NEW RELEASE	BECKY	04/12/2005