

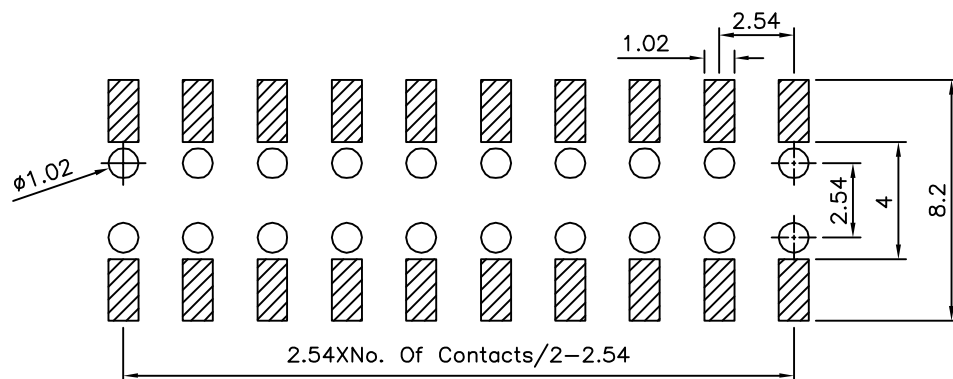


# SPECIFICATION

Current Rating:3A  
Withstand Voltage:1000V AC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operating Temperature:-40°C~+105°C  
Insulator:PA6T(UL94V-0),Black  
Contact:Phosphor Bronze,Gold Flash Over Nickel  
RoHS Compliant



Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

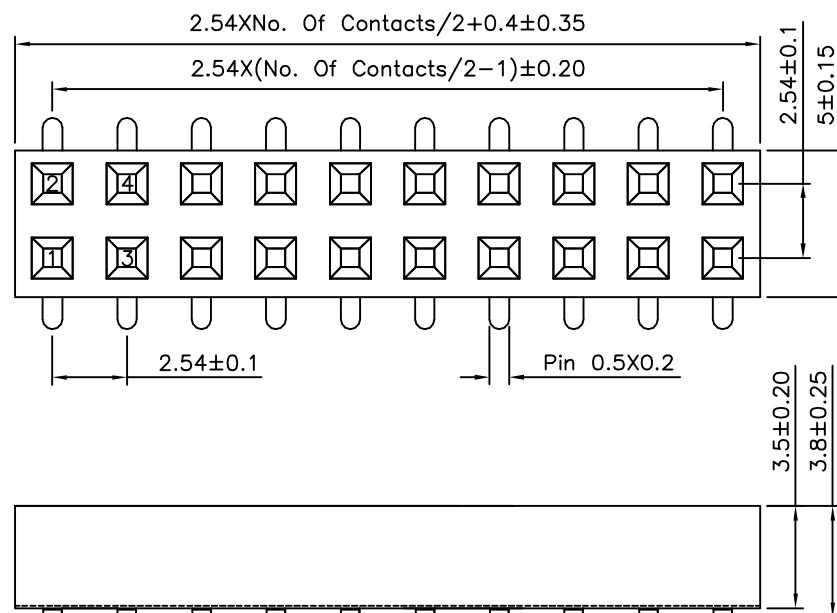

**4UCON** 元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

20897

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

HAO


REV.

A0

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

|      |            |       |                 |
|------|------------|-------|-----------------|
| X    | $\pm 0.25$ | X.    | $\pm 2^\circ$   |
| .X   | $\pm 0.20$ | .X.   | $\pm 1.5^\circ$ |
| .XX  | $\pm 0.15$ | .XX.  | $\pm 1^\circ$   |
| .XXX | $\pm 0.10$ | .XXX. | $\pm 0.5^\circ$ |

UNIT  
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

01/13/2015