

J

I

H

G

F


E

D




C

B

A

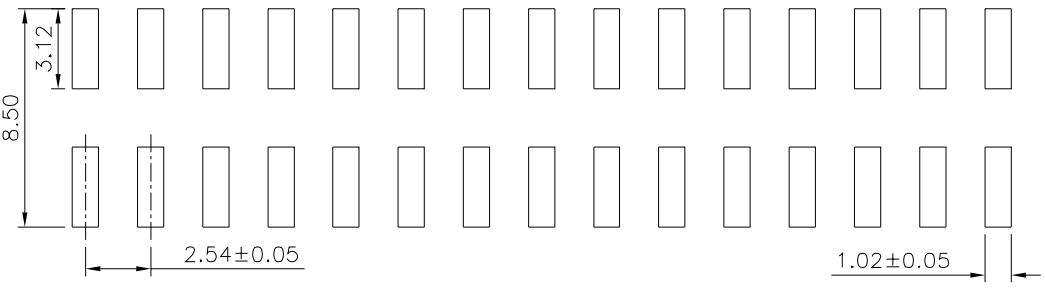

Recommended P.C.B. Layout

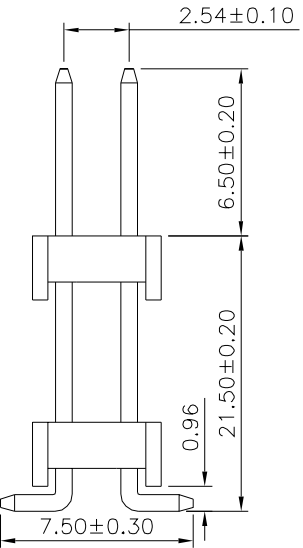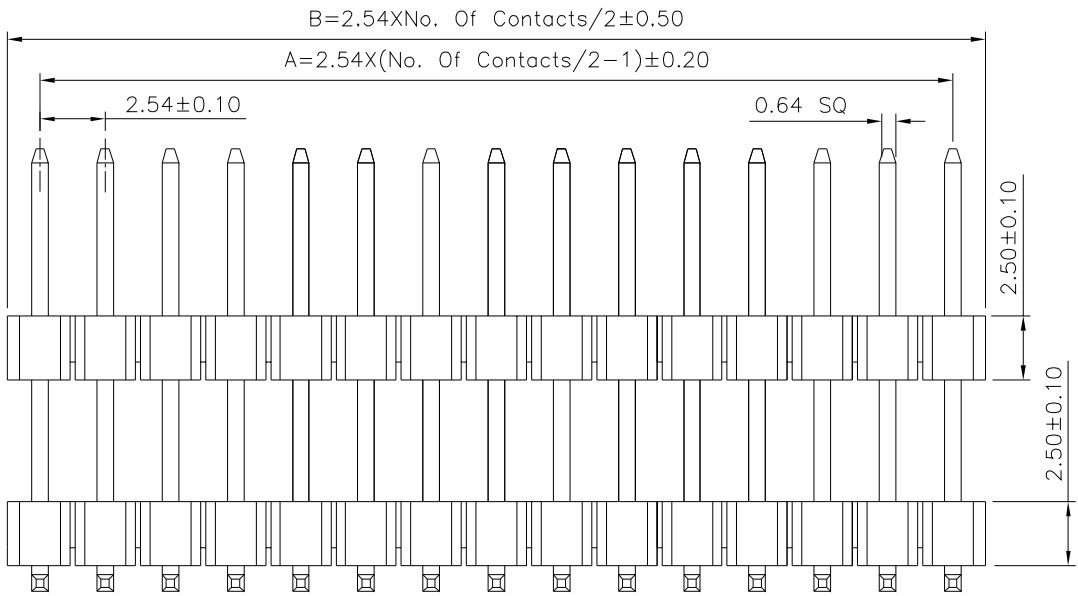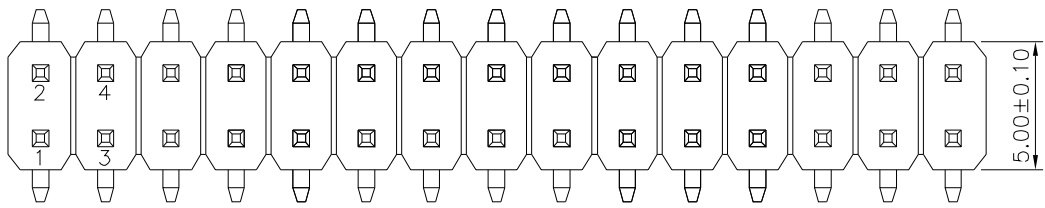

SPECIFICATION
Current Rating:3 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.,UL94V-0,Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Pin	A	B	Pin	A	B
02	2.54	5.08	42	50.80	53.34
04	5.08	7.62	44	53.34	55.88
06	7.62	10.16	46	55.88	58.42
08	10.16	12.70	48	58.42	60.96
10	12.70	15.24	50	60.96	63.50
12	15.24	17.78	52	63.50	66.04
14	17.78	20.32	54	66.04	68.58
16	20.32	22.86	56	68.58	71.12
18	22.86	25.40	58	71.12	73.66
20	25.40	27.94	60	73.66	76.20
22	27.94	30.48	62	76.20	78.74
24	30.48	33.02	64	78.74	81.28
26	33.02	35.56	66	81.28	83.82
28	35.56	38.10	68	83.82	86.36
30	38.10	40.64	70	86.36	88.90
32	40.64	43.18	72	88.90	91.44
34	43.18	45.72	74	91.44	93.98
36	45.72	48.26	76	93.98	96.52
38	48.26	50.80	78	96.52	99.06
40			80	99.06	101.60

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
20923		MEI	
		CHECKED BY	HZF
		DRAWING BY	CYP
SCALE	NONE	REV.	A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 ANG.					
UNIT	mm	NEW RELEASE		HZF	05/07/2016
NO.	REV.	REVISIONS		CHK	DATE