

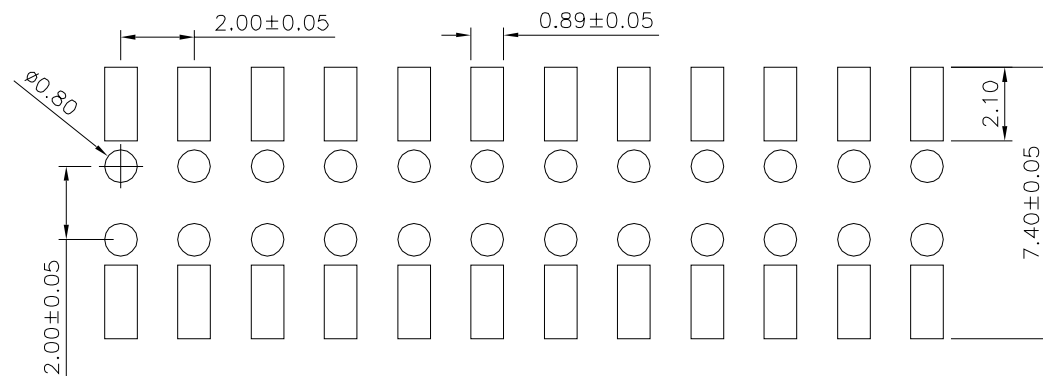



SPECIFICATION

Current Rating:1.5 Amp
Dielectric Withstand:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T+30%G.F.(UL94V-0),Black
Contact:Phosphor Bronze,Gold Flash Over Nickel
RoHS Compliant

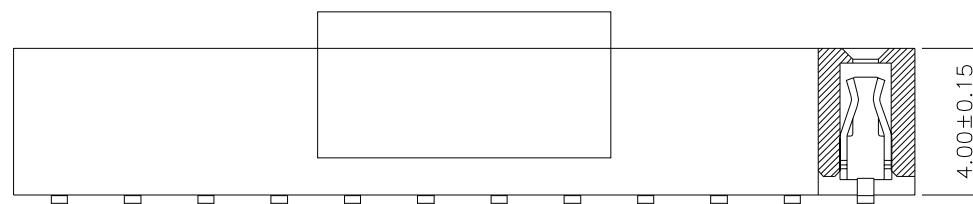

Recommended P.C.B. Layout

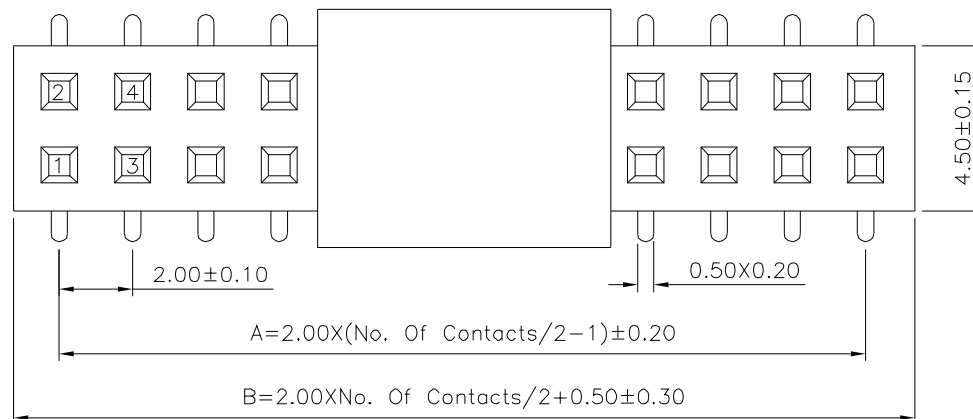

Pin	A	B	Pin	A	B
04	2.00	4.50	44	42.00	44.50
06	4.00	6.50	46	44.00	46.50
08	6.00	8.50	48	46.00	48.50
10	8.00	10.50	50	48.00	50.50
12	10.00	12.50	52	50.00	52.50
14	12.00	14.50	54	52.00	54.50
16	14.00	16.50	56	54.00	56.50
18	16.00	18.50	58	56.00	58.50
20	18.00	20.50	60	58.00	60.50
22	20.00	22.50	62	60.00	62.50
24	22.00	24.50	64	62.00	64.50
26	24.00	26.50	66	64.00	66.50
28	26.00	28.50	68	66.00	68.50
30	28.00	30.50	70	68.00	70.50
32	30.00	32.50	72	70.00	72.50
34	32.00	34.50	74	72.00	74.50
36	34.00	36.50	76	74.00	76.50
38	36.00	38.50	78	76.00	78.50
40	38.00	40.50	80	78.00	80.50
42	40.00	42.50			

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

20956

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

HAO

REV.


A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.30

.XX ±0.20

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

06/29/2016

DATE