
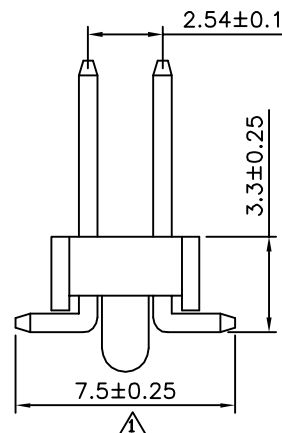
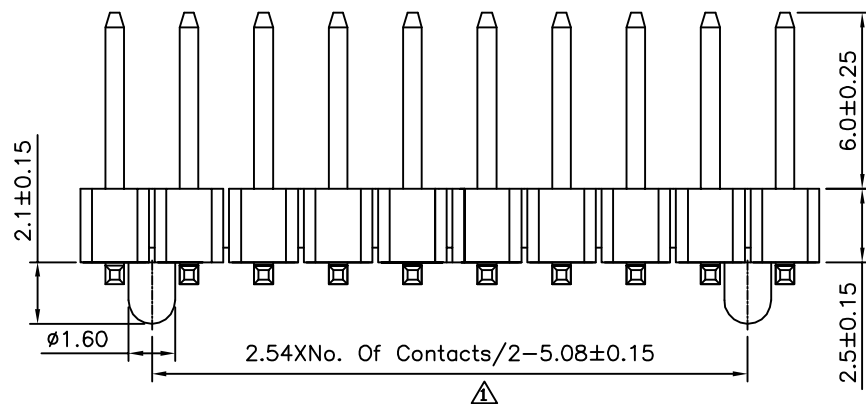
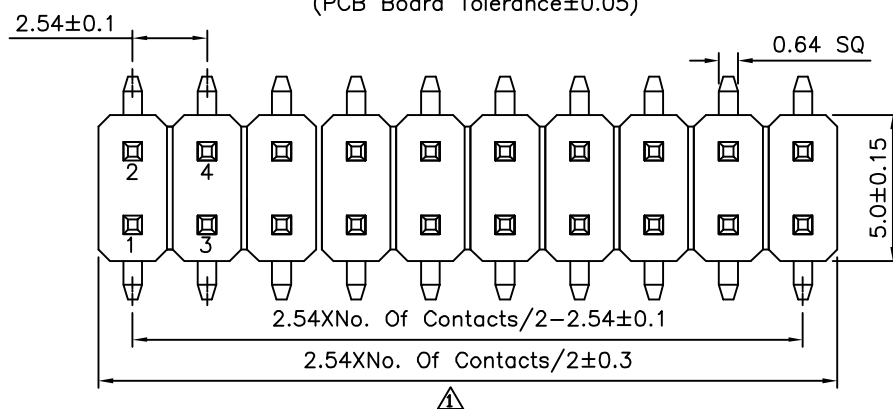


SPECIFICATION

Current Rating:3A
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

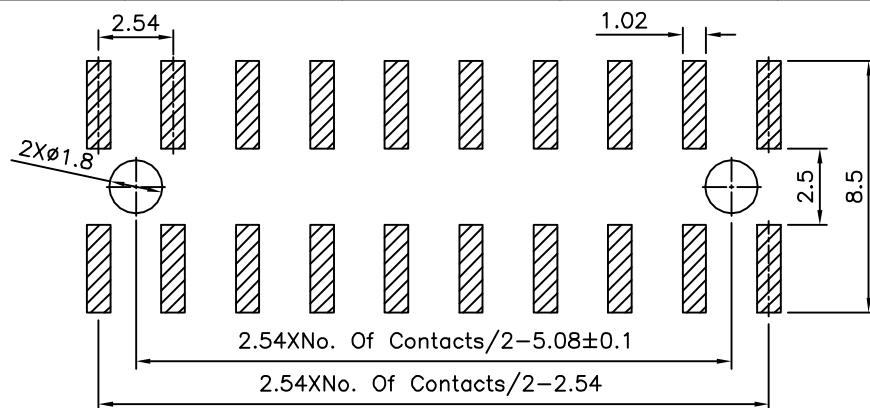

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21011

SCALE NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

SAN


REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.25 X.* ±2°
 .X ±0.20 .X* ±1.5°
 .XX ±0.15 .XX* ±1°
 .XXX ±0.10 .XXX* ±0.5°

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
A1		Modify Data	HZF	04/21/2014
A0		NEW RELEASE	HZF	10/11/2013