






Recommended P.C.B. Layout

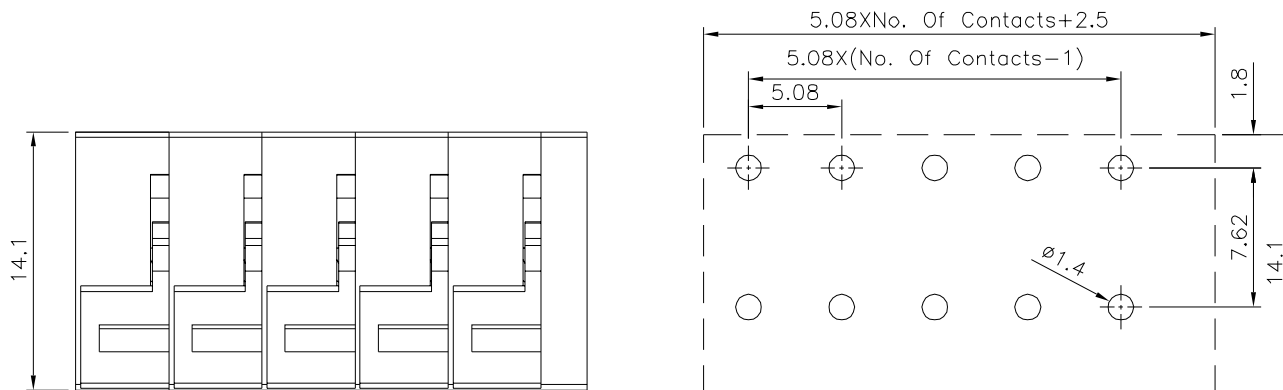

SPECIFICATION

Current Rating:10A/Way Max.
Voltage Rating:300V AC
Withstanding Voltage:2500V AC For 1 Minute
Test Time=60s/1 PCS
Contact Resistance:20 Milliohms Max.
Wire Range:14~22 AWG
Operating Temperature:-40°C~+105°C
Contact:Copper Alloy,Tin Plated
Wire Guard:Stainless Steel
Insulator Body:Polyamide+G.F.(UL94V-0),Green
RoHS Compliant

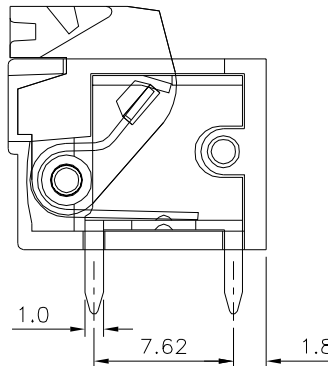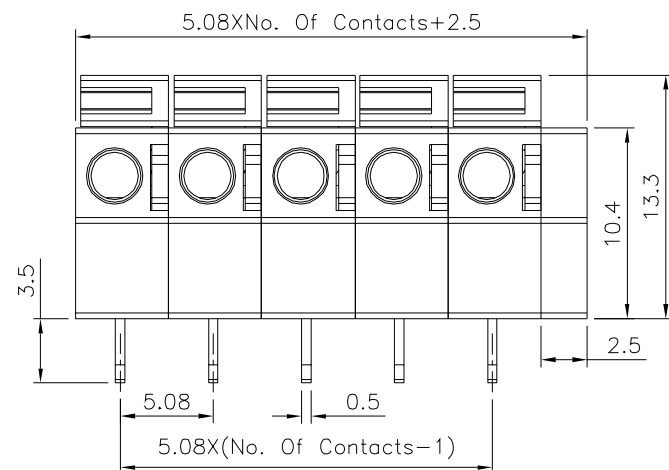

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21034

SCALE

NONE

REV.

A2

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.30
.XX ± 0.20
ANG. $\pm 1^\circ$

UNIT
mm



	A2	Modify Data	HZF	07/08/2024
	A1	Modify Data	HZF	07/03/2013
	A0	NEW RELEASE	HZF	02/10/2010
NO.REV.	REVISIONS		CHK	DATE