File No.	689HG18806	SHEET	1/1

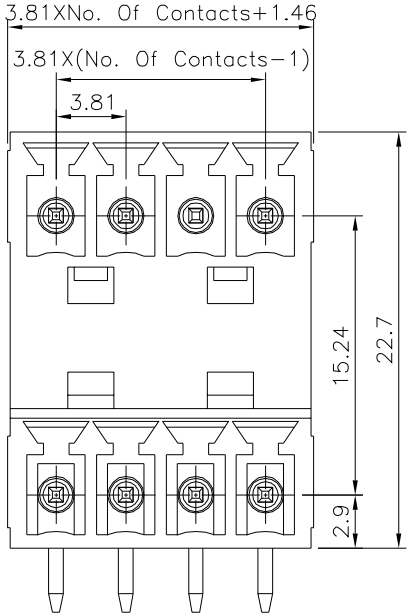

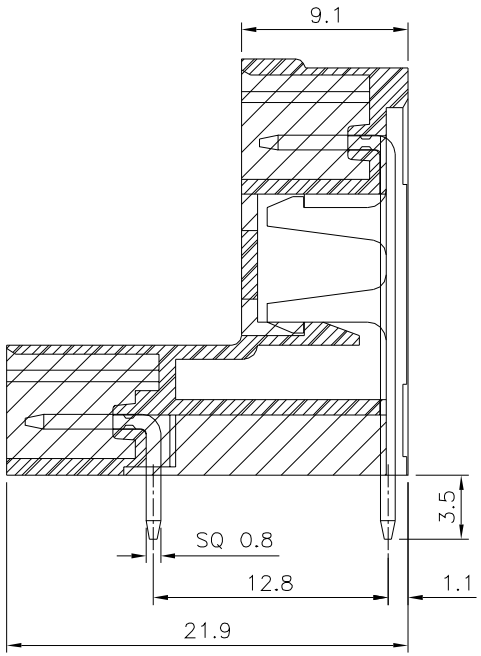

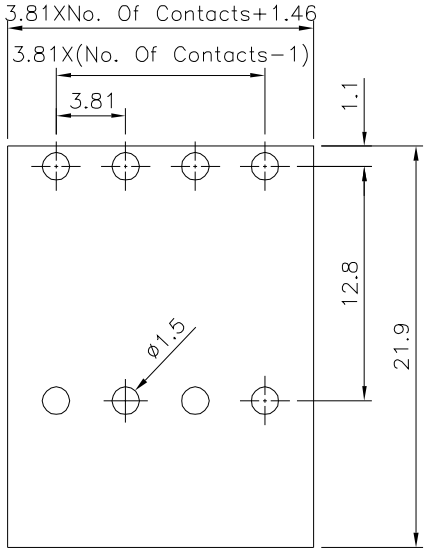

Recommended P.C.B. Layout

SPECIFICATION

Current Rating: 12A/Way Max.
Voltage Rating: 300V AC
Withstand Voltage: 2500V AC/Minute
Operation Temperature: −40°C~+105°C
Soldering Temperature: 250°C 5S Max.
Insulator Body(Housing): Polyamide+G.F.(UL94V−0),Green
Solder Pin:Copper Alloy,Tin Plated
RoHS Compliant

4UCON 元化興業股份有限公司 4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY MEI	UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.50 .X ±0.30 .XX ±0.20 ANG. ±1°
21072	CHECKED BY HZF	
	DRAWING BY CYP	
SCALE NONE	REV. A0	UNIT mm

NO.	REV.	REVISIONS	CHK	DATE
0	A0	NEW RELEASE	HZF	01/18/2017