
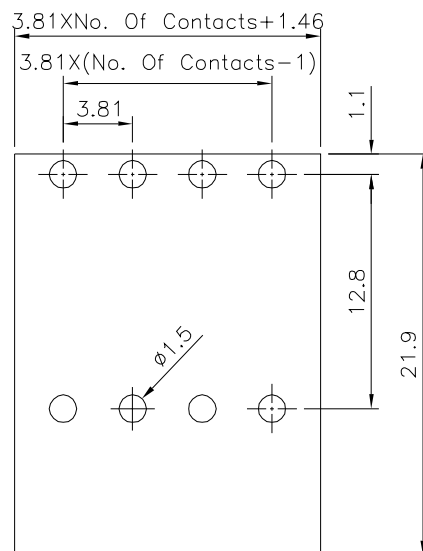
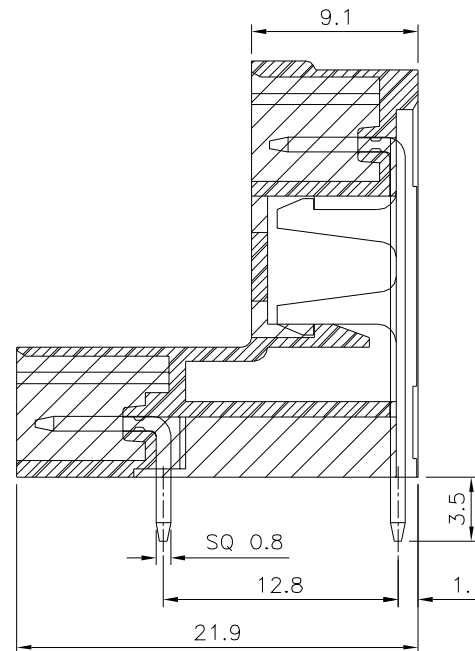


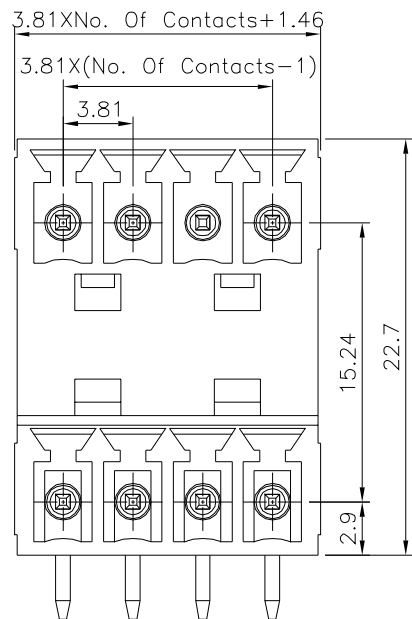

Recommended P.C.B. Layout

SPECIFICATION

Current Rating: 12A/Way Max.
 Voltage Rating: 300V AC
 Withstand Voltage: 2500V AC/Minute
 Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
 Soldering Temperature: 250°C 5S Max.
 Insulator Body(Housing): Polyamide+G.F.(UL94V-0),Green
 Solder Pin:Copper Alloy,Tin Plated
 RoHS Compliant

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21073

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ± 0.50
 .X ± 0.30
 .XX ± 0.20
 ANG. $\pm 1^{\circ}$

SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

01/18/2017