


Current Rating:3 Amp
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~+105°C
Insulator:PA6T(UL94V−O),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

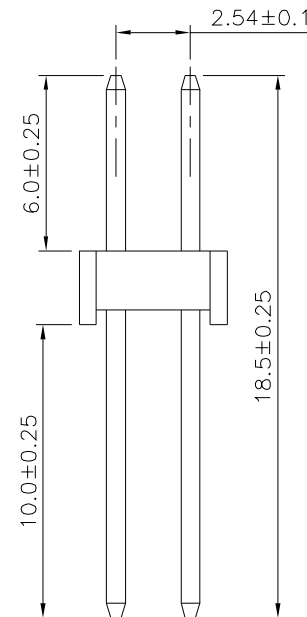

DRAWING No.

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

SCALE

NONE


REV.

A0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	± 0.25	X.*	$\pm 2^{\circ}$
.X	± 0.20	.X*	$\pm 1.5^{\circ}$
.XX	± 0.15	.XX*	$\pm 1^{\circ}$
.XXX	± 0.10	.XXX*	$\pm 0.5^{\circ}$

UNIT	mm
------	----



5° 

AO	
----	--

0	NEW RELEASE
---	-------------

HZF

02/08/2017

NO.	REV
-----	-----

REVISIONS

CHK

DATE
