

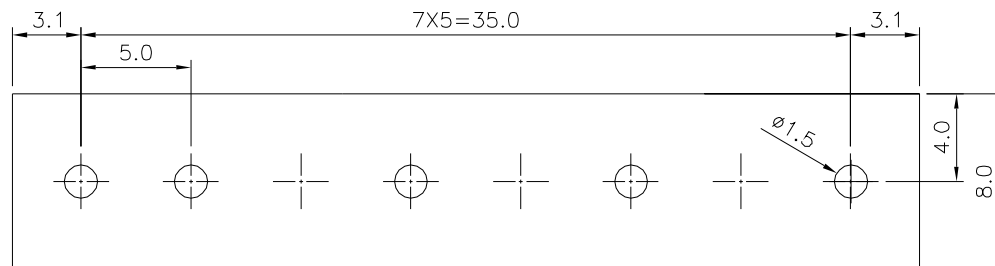
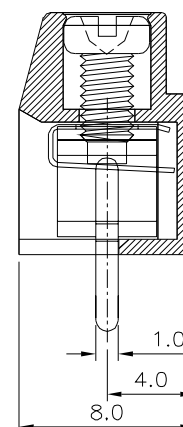


SPECIFICATION

Current Rating:15 Amps/Way Max.
Voltage Rating:250V AC
Contact Resistance:20 Milliohms Max.
Withstand Voltage:2500V AC/Minute,Test Time=60 Sec./PCS
Operation Temperature:-40°C~+105°C
Soldering Temperature:250°C±10°C/5 Sec
Torque:4.0 Kgf.cm/M2.5
Wire Range:14~24 AWG
Terminal:Copper Alloy,Tin Plated
Screw:Steel,Galvanized With Cr3+ Plated
Wire Guard:Stainless Steel
Insulator Body(Housing):Polyamide(UL94V-0),Green
RoHS Compliant

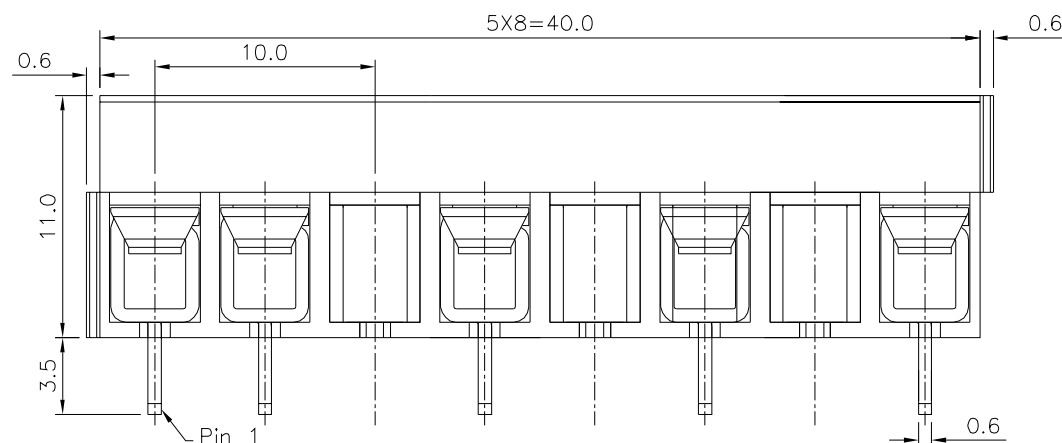

Recommended P.C.B. Layout

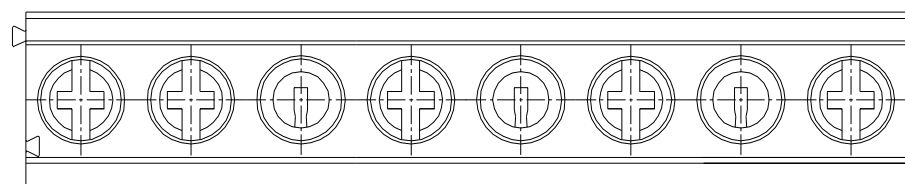

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21108

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.50
.X ±0.30
.XX ±0.20
ANG. ±1°

SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

NEW RELEASE
REVISIONS

CHK

DATE
03/13/2017