


SPECIFICATION

Current Rating:1.5 Amps
 Withstand Voltage:500V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Housing:PA6T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

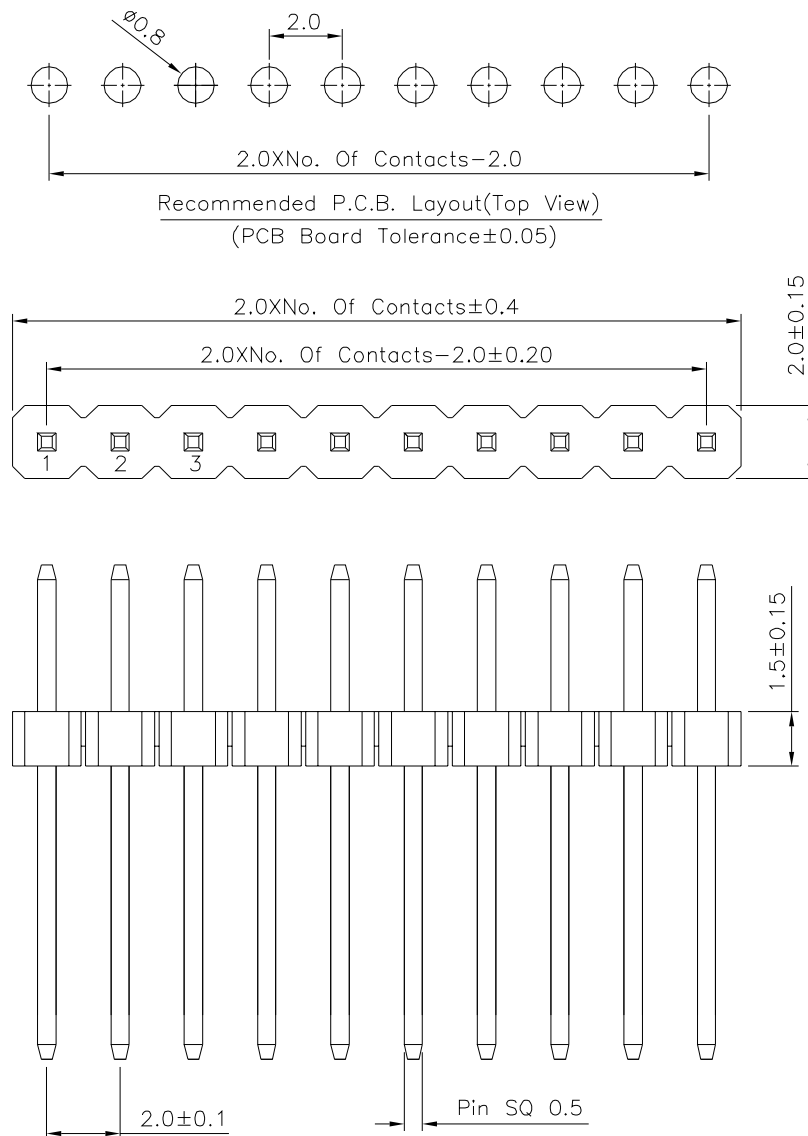

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21125

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X, ± 0.25	X*, $\pm 2^*$
.X ± 0.20	.X* $\pm 1.5^*$
.XX ± 0.15	.XX* $\pm 1^*$
.XXX ± 0.10	.XXX* $\pm 0.5^*$

UNIT mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

03/28/2017

NO. REV.

REVISIONS

CHK

DATE