


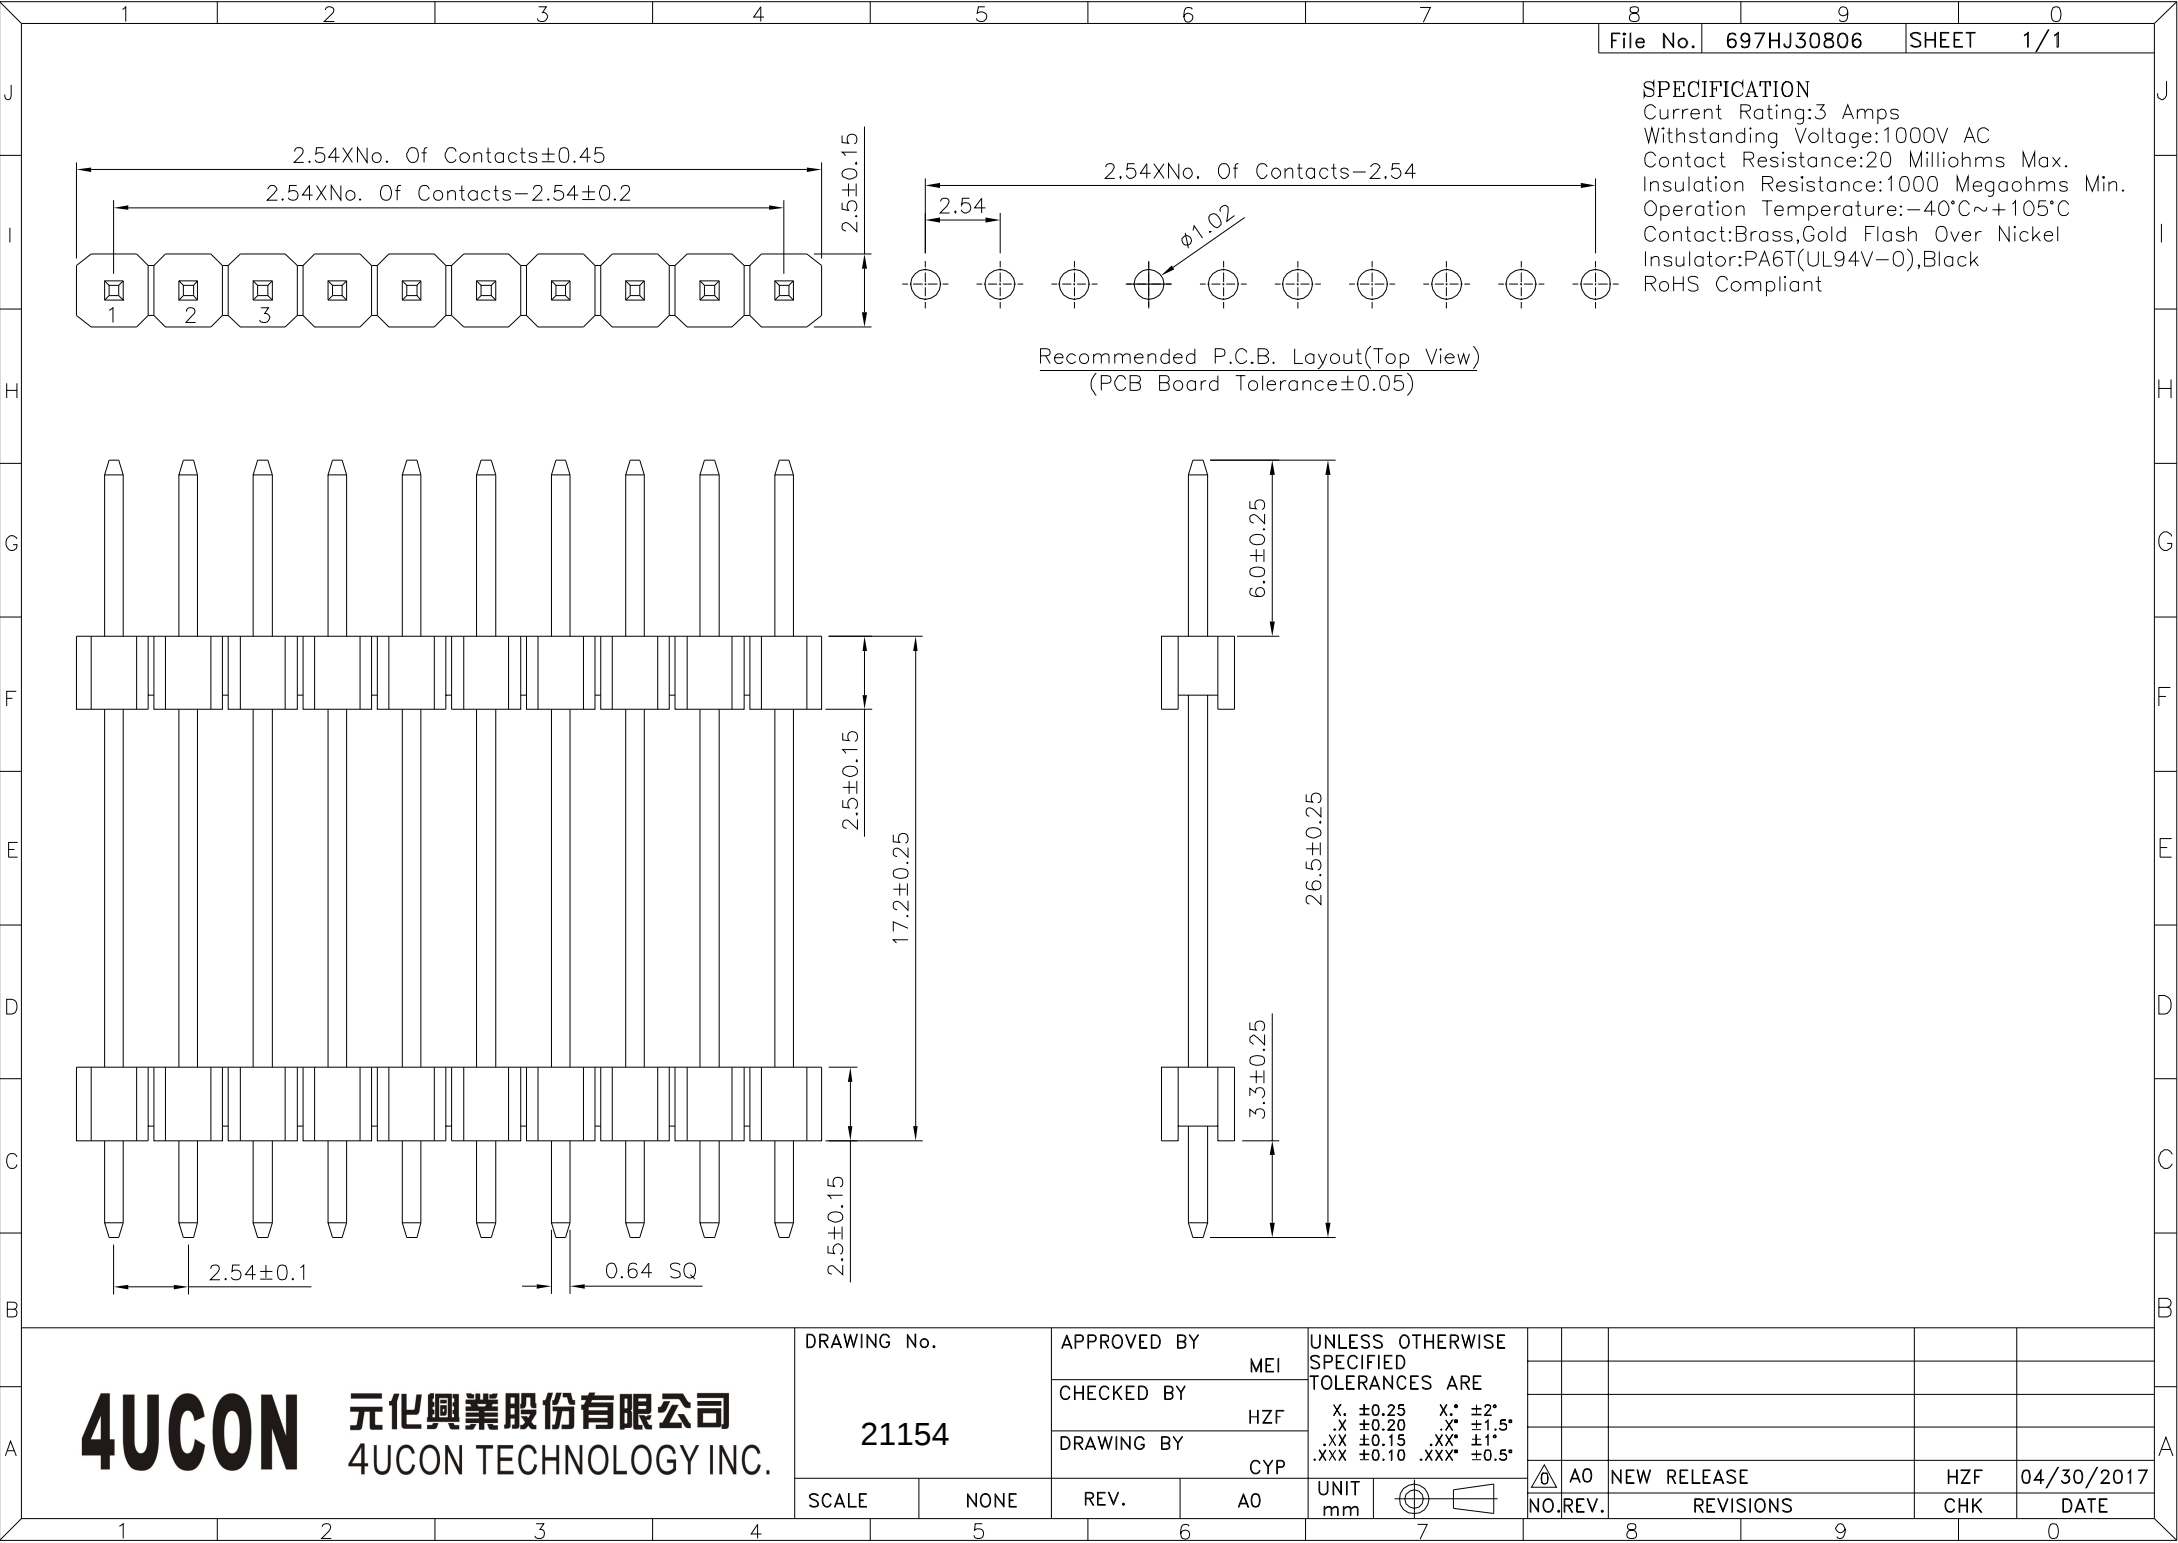

SPECIFICATION
Current Rating:3 Amps
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No. 21154		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X, ±0.25 X,* ±2° .X ±0.20 .X* ±1.5° .XX ±0.15 .XX* ±1° .XXX ±0.10 .XXX* ±0.5°						
		MEI								
		CHECKED BY								
		HZF								
		DRAWING BY								
		CYP								
SCALE	NONE	REV.	A0	UNIT mm			AO	NEW RELEASE	HZF	04/30/2017
							NO. REV.	REVISIONS	CHK	DATE