


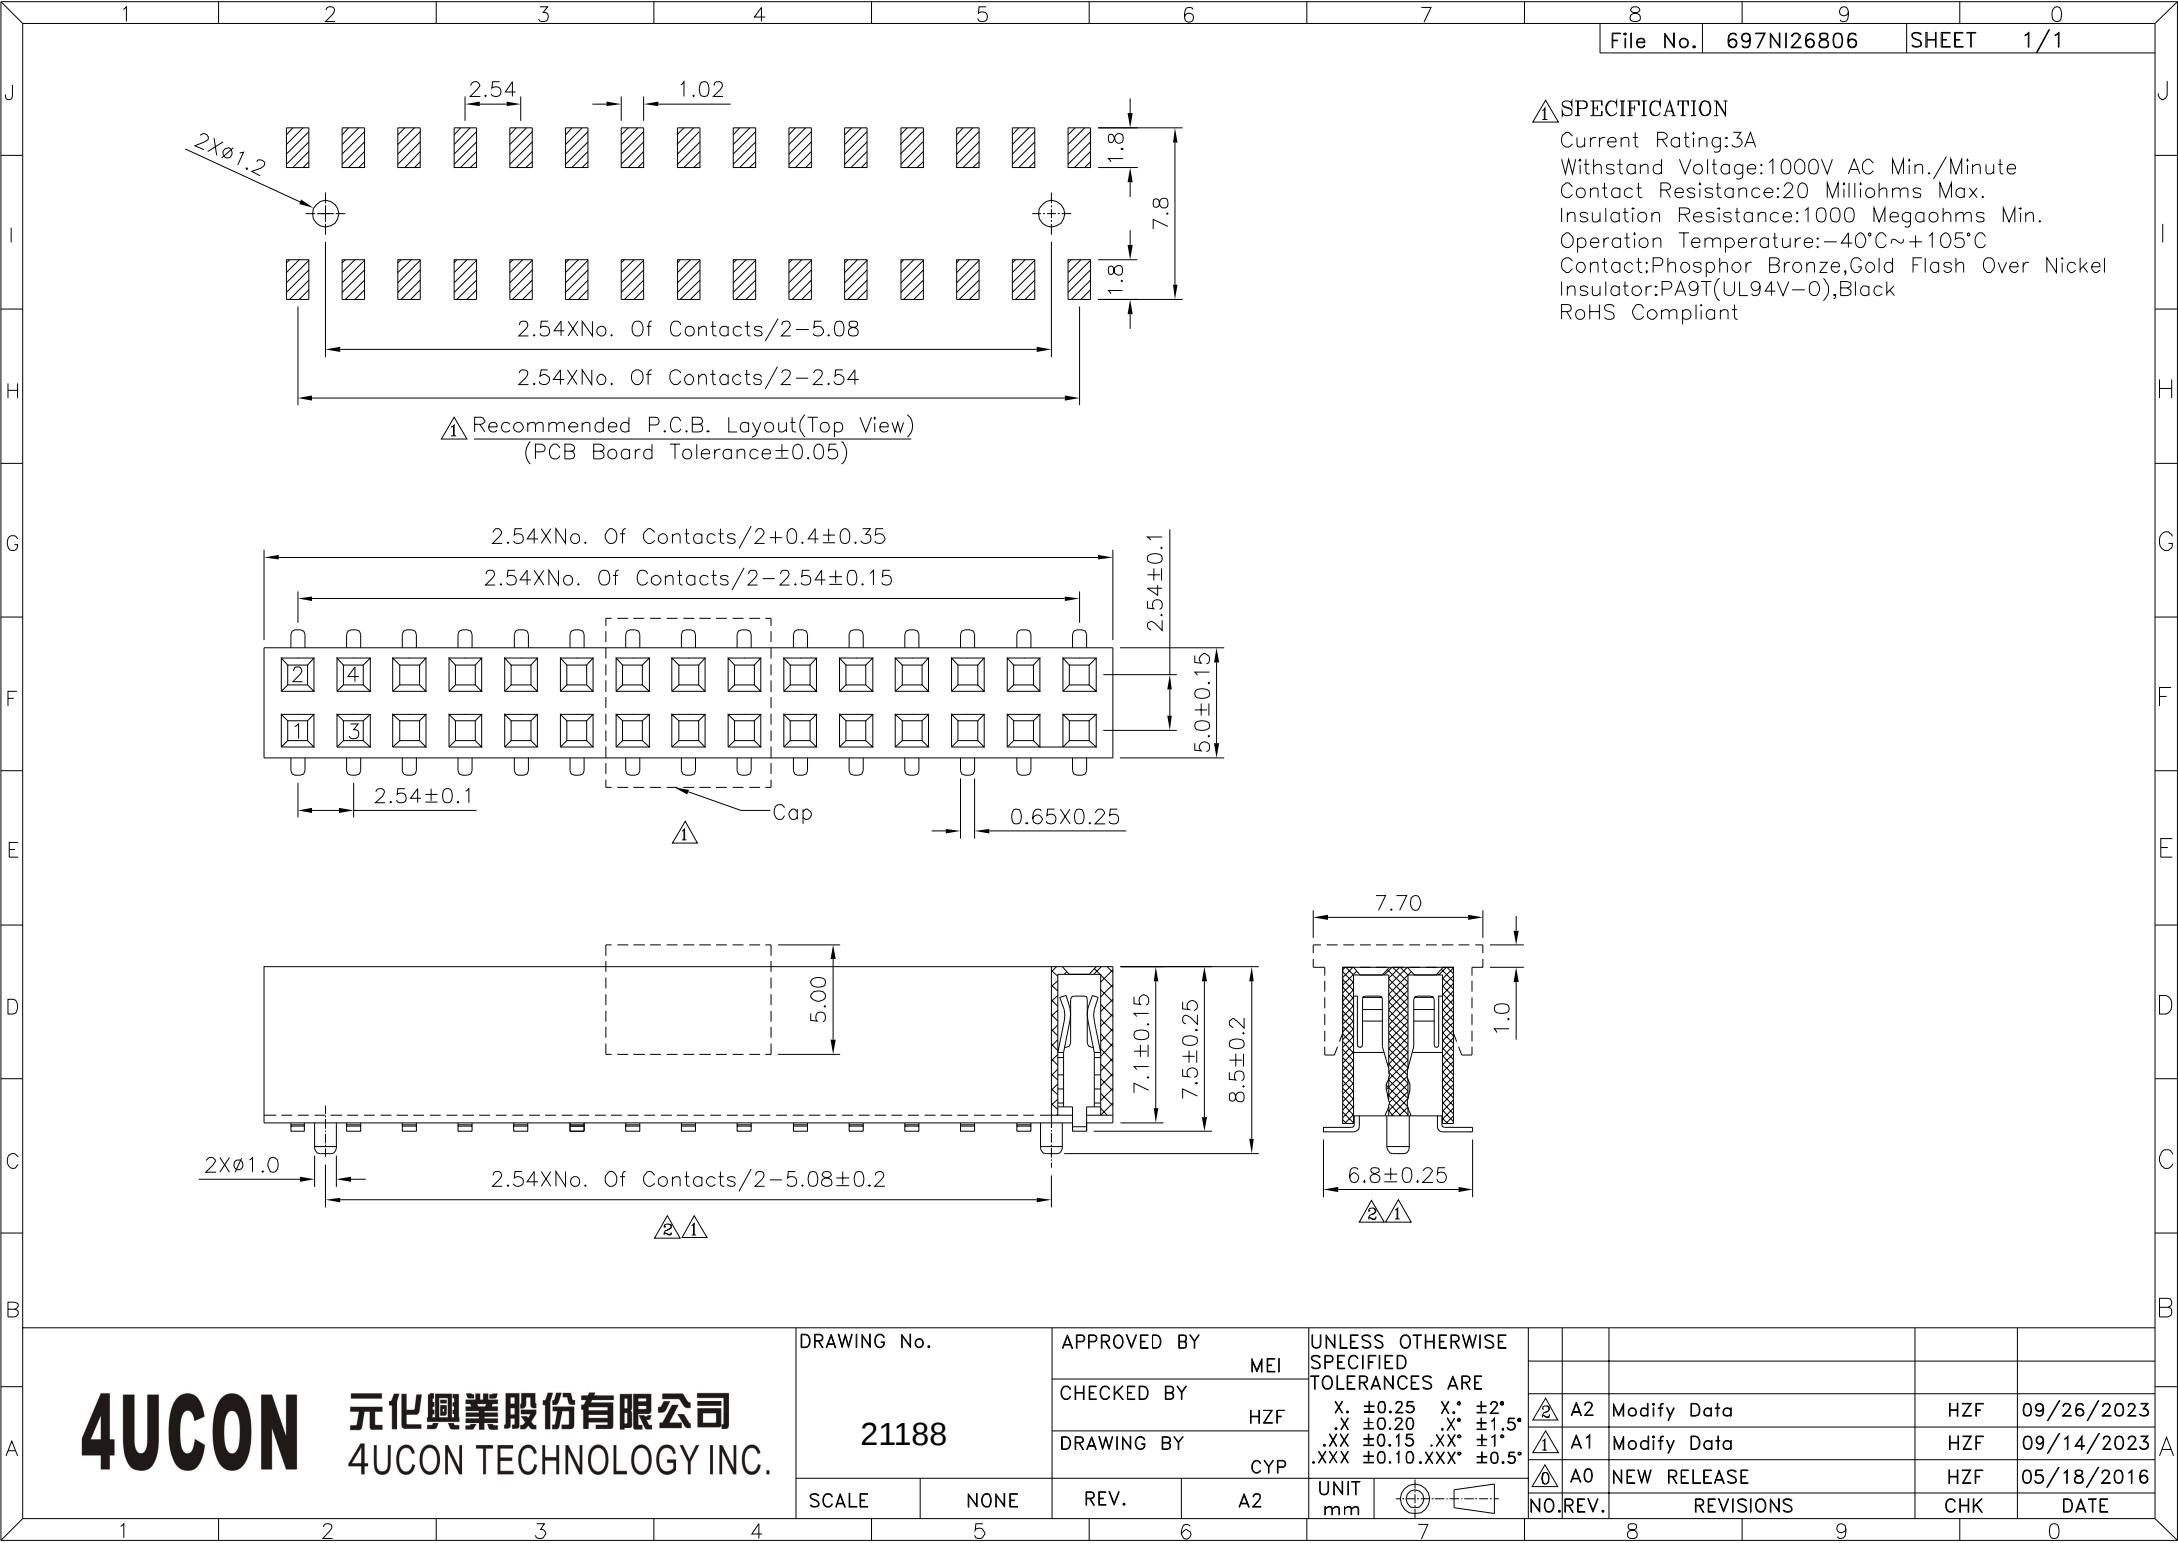

△ SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA9T(UL94V-O),Black
RoHS Compliant

4Ucon 元化興業股份有限公司
4Ucon TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	
21188		HZF	
		DRAWING BY	
		CYP	
SCALE	NONE	REV.	A2

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
X. ±0.25 X.± ±2°		△ A2	Modify Data	HZF	09/26/2023
.X ±0.20 .X. ±1.5°		△ A1	Modify Data	HZF	09/14/2023
.XX ±0.15 .XX. ±1°		△ A0	NEW RELEASE	HZF	05/18/2016
.XXX ±0.10 .XXX. ±0.5°					
UNIT	mm	NO. REV.	REVISIONS		DATE