
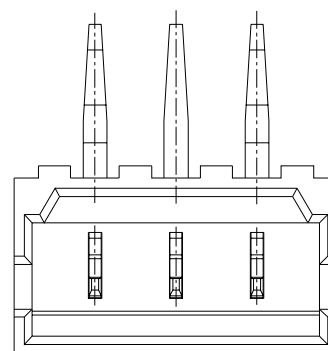



Recommended P.C.B. Layout

SPECIFICATION


Current Rating:2A AC/DC
Voltage Rating:125V AC/DC
Withstand Voltage:800V AC/Minute
Contact Resistance:10 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Temperature Range:-25°C~+85°C
⚠ Insulator:PA66+15%G.F.(UL94V-0)
Contact:Brass,Tin Plated
RoHS Compliant

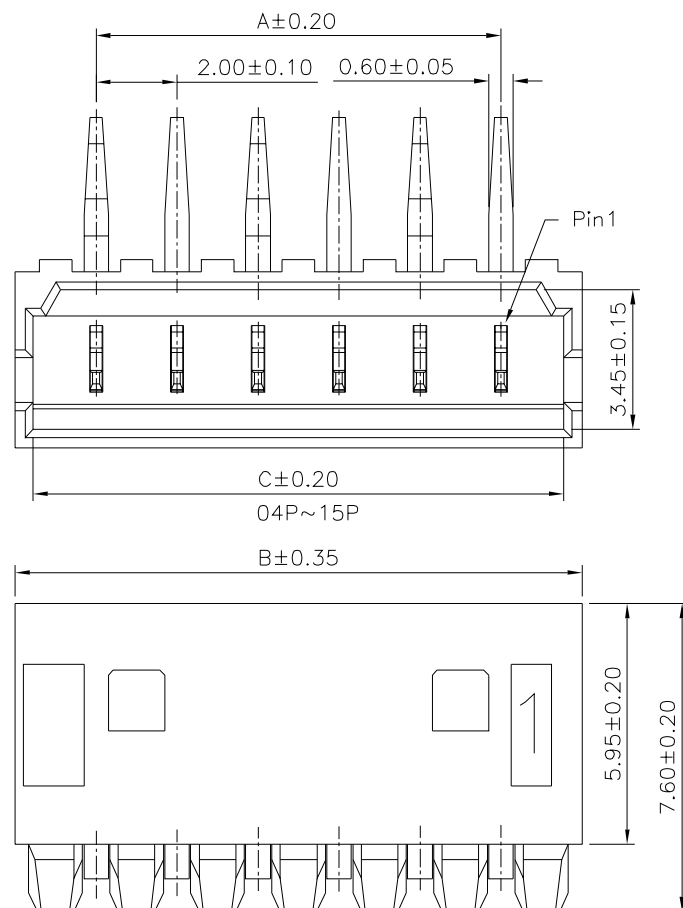

03P

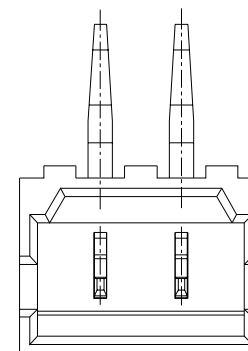

02P

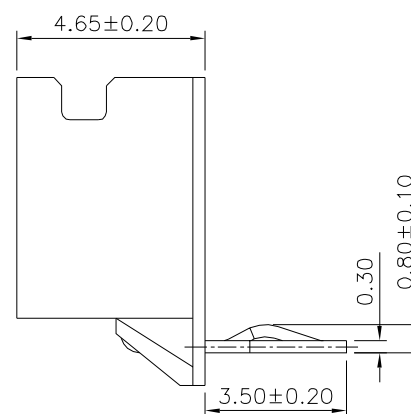

Pin	A	B	C
02	2.00	6.00	5.10
03	4.00	8.00	7.10
04	6.00	10.00	9.10
05	8.00	12.00	11.10
06	10.00	14.00	13.10
07	12.00	16.00	15.10
08	14.00	18.00	17.10
09	16.00	20.00	19.10
10	18.00	22.00	21.10
11	20.00	24.00	23.10
12	22.00	26.00	25.10
13	24.00	28.00	27.10
14	26.00	30.00	29.10
15	28.00	32.00	31.10

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21275

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.XX ±0.25
XXX ±0.20
ANG. ±1°

UNIT
mm



⚠ A1

Modify Data

05/23/2016

⚠ A0

NEW RELEASE

HZF

03/03/2014

NO. REV.

REVISIONS

CHK

DATE