
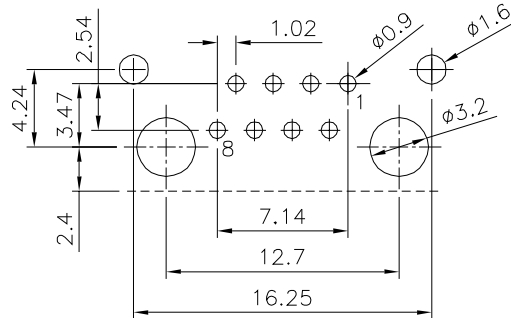
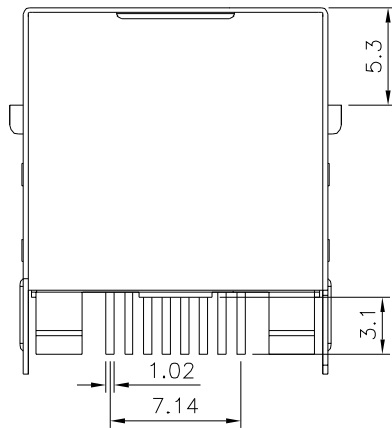
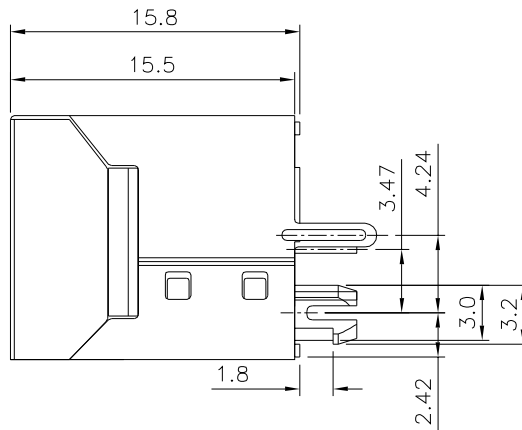


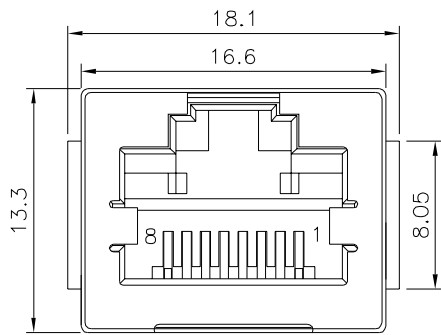

Suggested P.C.B. Layout(Top View)

SPECIFICATION

Current Rating:1.5A
Voltage Rating:125V AC RMS
Contact Resistance:30 Milliohms Max.
Insulation Resistance:500 Megaohms Min.
At 500V DC
Withstanding Voltage:1000V AC RMS 50Hz 1 Minute
Operation Temperature:-40°C~+85°C
Storage Temperature:-40°C~+85°C
Operating Life:750 Cycles Min.
PCB Retentionpre-Solder:1 LB Min.
Housing:PBT(UL94V-0),Black
Contact:Phosphor Bronze
Gold Plated 06u" Over All,Over Nickel
Shield:Brass,Nickel Plated
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21286

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.20
.XX ±0.15
.XXX ±0.075
ANG. ±1.5°


SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

11/30/2016