
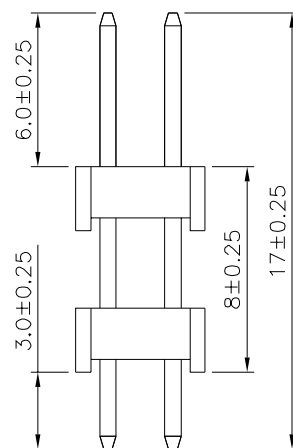
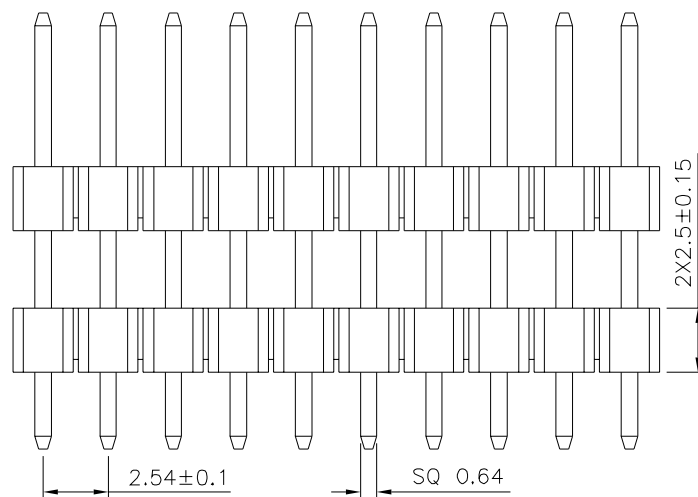


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

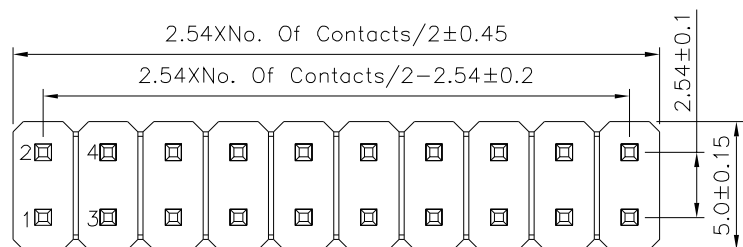

SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operating Temperature: $-40^{\circ}\text{C}\sim +105^{\circ}\text{C}$
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21298

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X: ± 0.25 X*: $\pm 2^{\circ}$
.X: ± 0.20 .X*: $\pm 1.5^{\circ}$
.XX: ± 0.15 .XX*: $\pm 1^{\circ}$
.XXX: ± 0.10 .XXX*: $\pm 0.5^{\circ}$

SCALE

NONE

REV.

A0

UNIT

mm



NO. REV.

NEW RELEASE

REVISIONS

CHK

DATE

A0

NEW RELEASE

REVISIONS

CHK

DATE