
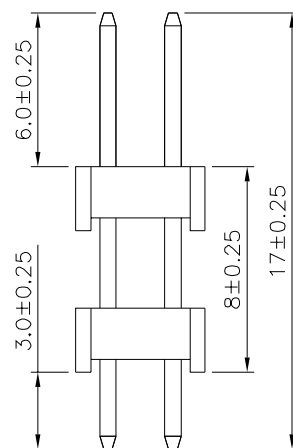
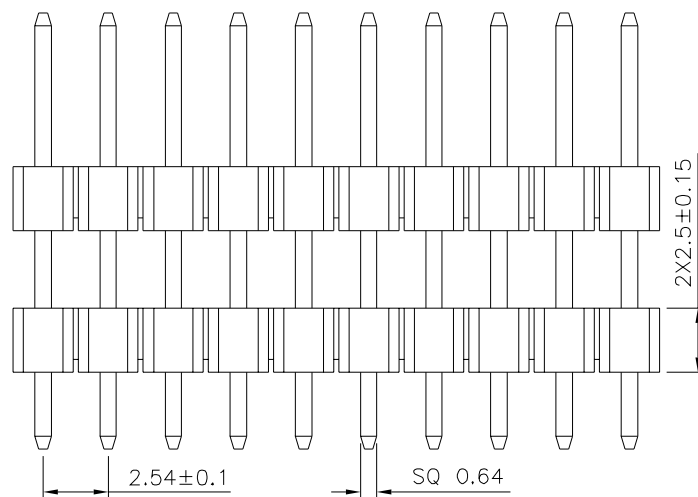


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

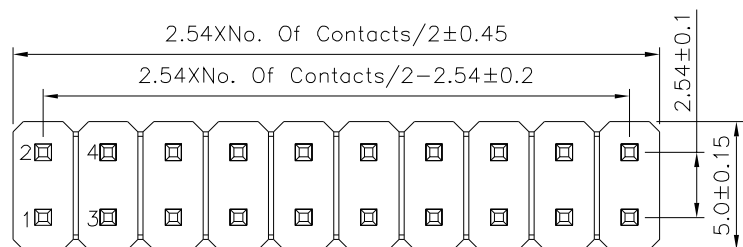

# SPECIFICATION

Current Rating:3A  
Withstand Voltage:1000V AC  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operating Temperature: $-40^{\circ}\text{C}\sim +105^{\circ}\text{C}$   
Insulator:PA6T(UL94V-0),Black  
Contact:Brass,Gold Flash Over Nickel  
RoHS Compliant

**4UCON**

元化興業股份有限公司  
4UCON TECHNOLOGY INC.

DRAWING No.

21299

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

X:  $\pm 0.25$  X\*:  $\pm 2^{\circ}$   
.X:  $\pm 0.20$  .X\*:  $\pm 1.5^{\circ}$   
.XX:  $\pm 0.15$  .XX\*:  $\pm 1^{\circ}$   
.XXX:  $\pm 0.10$  .XXX\*:  $\pm 0.5^{\circ}$

UNIT  
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

10/27/2017