

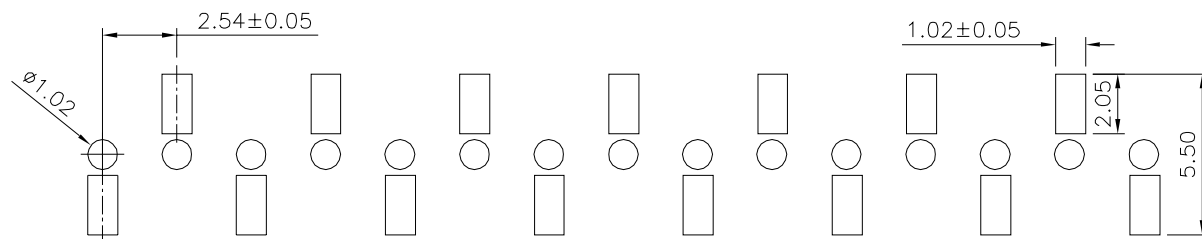
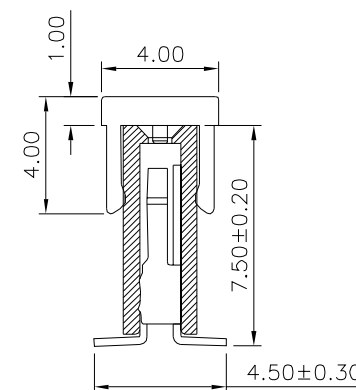


SPECIFICATION

Current Rating:3 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Housing:PA6T+30%G.F.(UL94V-0),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant

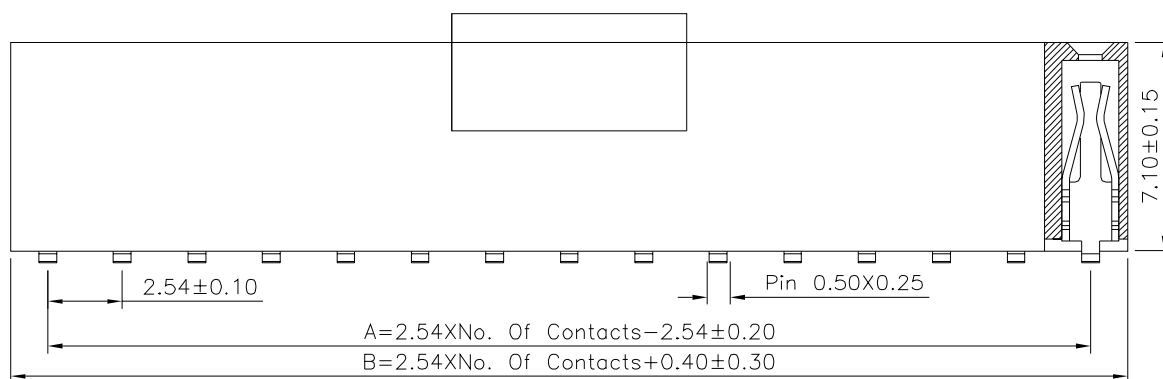

Recommended P.C.B. Layout
 For Bottom Entry

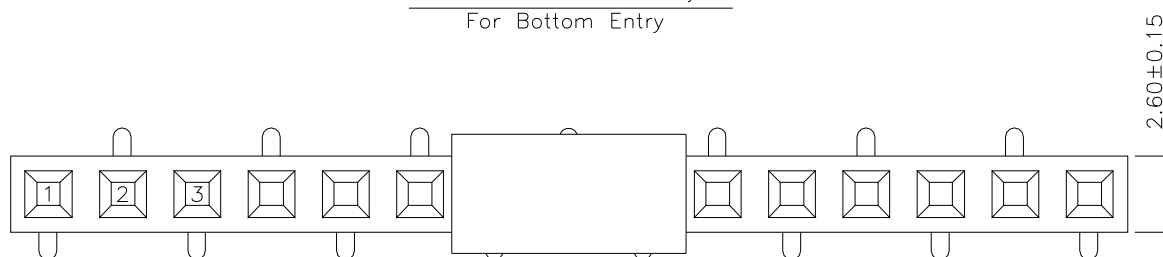

△ Pin	A	B	Pin	A	B
02	2.54	5.48	22	53.34	56.28
03	5.08	8.02	23	55.88	58.82
04	7.62	10.56	24	58.42	61.36
05	10.16	13.10	25	60.96	63.90
06	12.70	15.64	26	63.50	66.44
07	15.24	18.18	27	66.04	68.98
08	17.78	20.72	28	68.58	71.52
09	20.32	23.26	29	71.12	74.06
10	22.86	25.80	30	73.66	76.60
11	25.40	28.34	31	76.20	79.14
12	27.94	30.88	32	78.74	81.68
13	30.48	33.42	33	81.28	84.22
14	33.02	35.96	34	83.82	86.76
15	35.56	38.50	35	86.36	89.30
16	38.10	41.04	36	88.90	91.84
17	40.64	43.58	37	91.44	94.38
18	43.18	46.12	38	93.98	96.92
19	45.72	48.66	39	96.52	99.46
20	48.26	51.20	40	99.06	102.00
21	50.80	53.74			

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21317

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.


A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

.X ±0.30

.XX ±0.20

UNIT
 mm



△ A1

Modify Data

HZF

03/21/2020

△ A0

NEW RELEASE

HZF

01/18/2016

NO. REV.

REVISIONS

CHK

DATE