


△

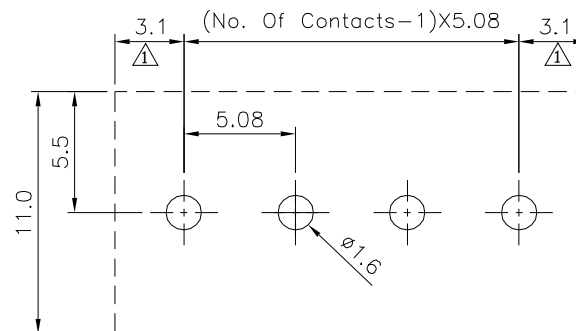

Recommended P.C.B. Layout

△ SPECIFICATION

Current Rating:16 Amps/Way Max.

Voltage Rating:300V AC

Contact Resistance:20 Milliohms Max.

Withstanding Voltage:2500V AC(1 Minute)

Test Time=60s/1 PCS

Wire Range:12~30 AWG

Operation Temperature:-40°C~+105°C

Soldering Reliability:250°C±10°C/5 Seconds Max.

△ Torque:4.5 Kgf.cm/M3



Insulator Body(Housing):Polyamide(UL94V-0),Green

Contact(Metal Housing):Copper Alloy,Nickel Plated

Solder Pin:Copper Alloy,Tin Plated

Terminal Screw:Steel,Galvanized With Cr3+ Plated

RoHS Compliant

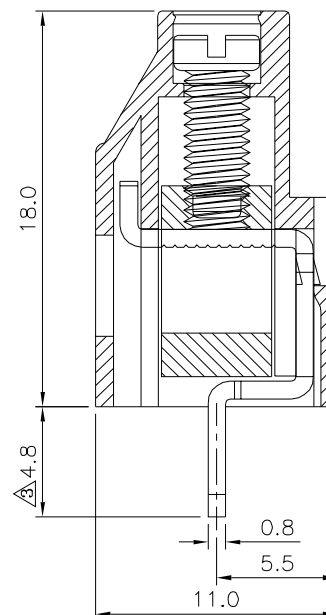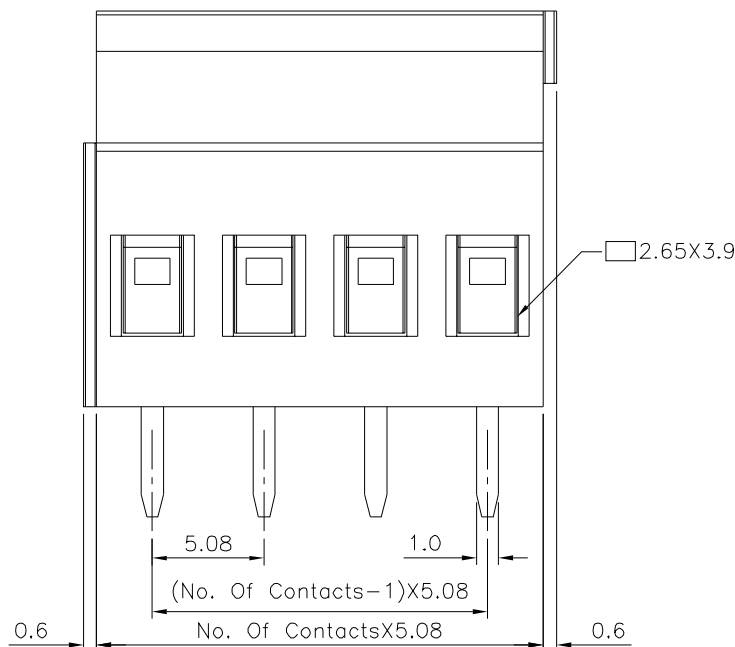

△

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. △

21339

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

SCALE

NONE

REV.

A3

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
△3	A3	Modify Dim.	HZF	04/26/2016
△2	A2	Modify Data	HZF	07/10/2013
△1	A1	Modify Data	HZF	01/06/2012
△0	A0	NEW RELEASE	HZF	09/23/2009