

J

I

H

G

F

E

D

C

B

A

J

I

H

G

F


E

D

C

B

A

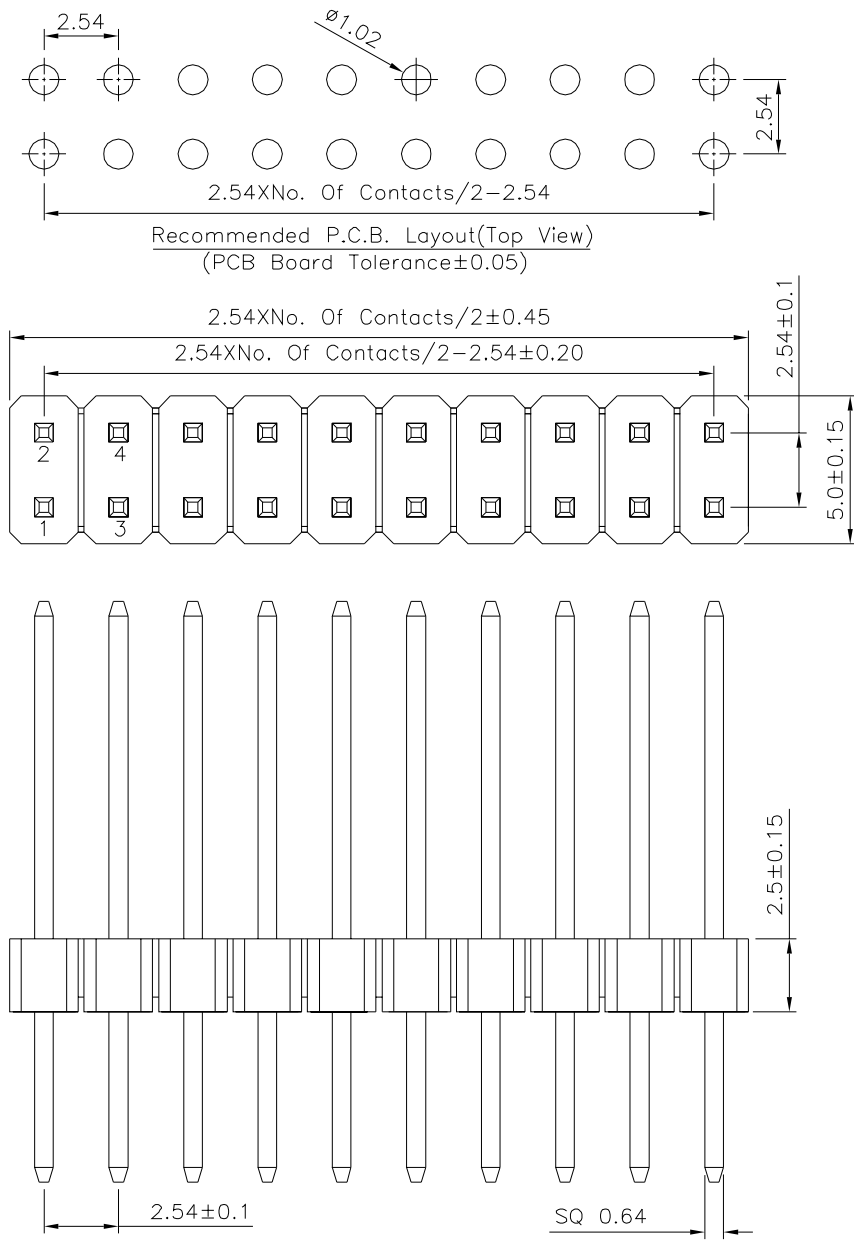

SPECIFICATION
Current Rating:3 Amps
Withstand Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature Range:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 21368		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ±0.25 X.* ±2" .X ±0.20 .X* ±1.5" .XX ±0.15 .XX* ±1" .XXX ±0.10 .XXX* ±0.5"							
		CHECKED BY									
		DRAWING BY									
SCALE	NONE	REV.	A0	UNIT mm		 A0	NEW RELEASE		HZF	12/15/2017	
						NO. REV.	REVISIONS		CHK	DATE	
	5		6		7		8		9		0