

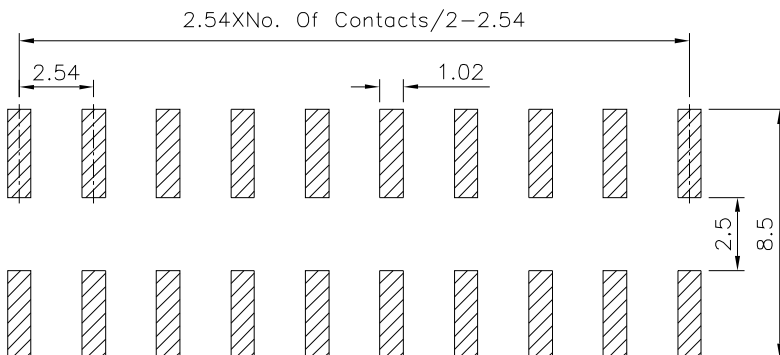


SPECIFICATION

Current Ration:3A
 ⚠ Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:−40°C~+105°C
 Housing:PA6T(UL94V−0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

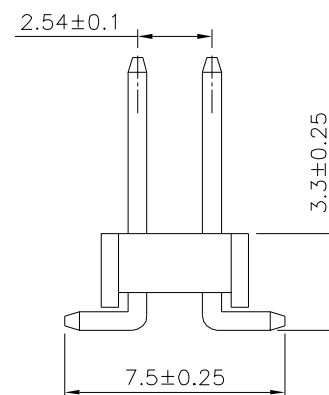

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

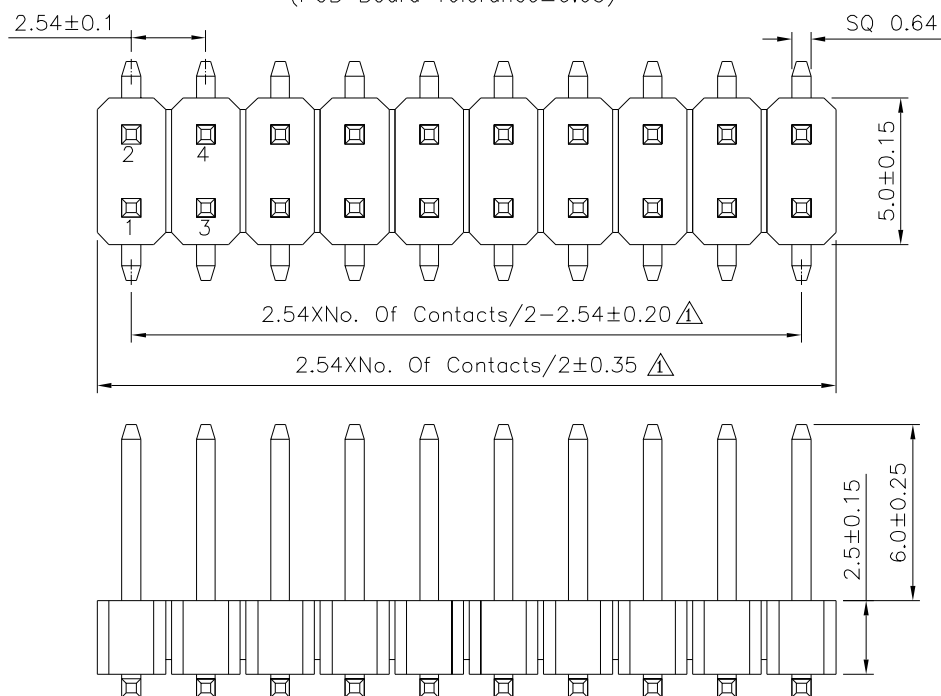

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21370

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.25 X.* ±2*
 .X ±0.20 .X* ±1.5*
 .XX ±0.15 .XX* ±1*
 .XXX ±0.10 .XXX* ±0.5*

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

⚠ A1	Modify Data	HZF	09/30/2016
------	-------------	-----	------------

⚠ A0	NEW RELEASE	HZF	10/15/2013
------	-------------	-----	------------