



SPECIFICATION


- Current Rating: 3A
- ⚠ Withstand Voltage: 1000V AC Min./Minute
- Contact Resistance: 20 Milliohms Max.
- Insulation Resistance: 1000 Megaohms Min.
- Operation Temperature: -40°C~+105°C
- ⚠ Housing: PA9T(UL94V-0),Black
- Contact: Brass,Gold Flash Over Nickel
- RoHS Compliant

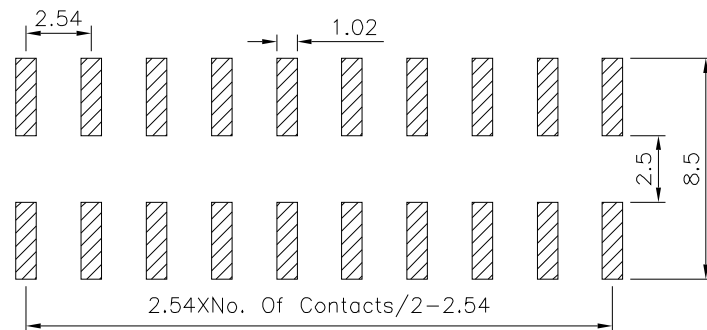


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance±0.05)

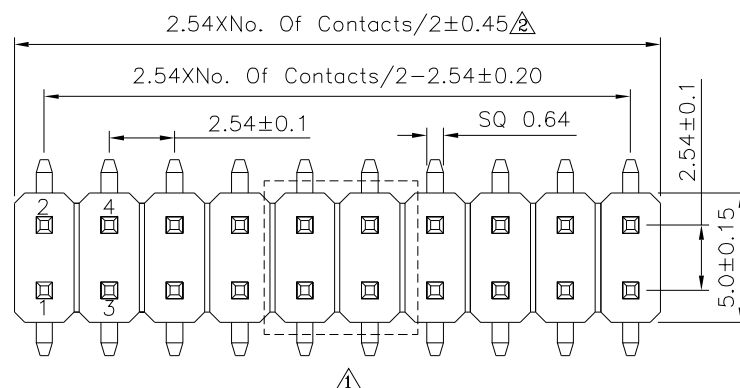

⚠

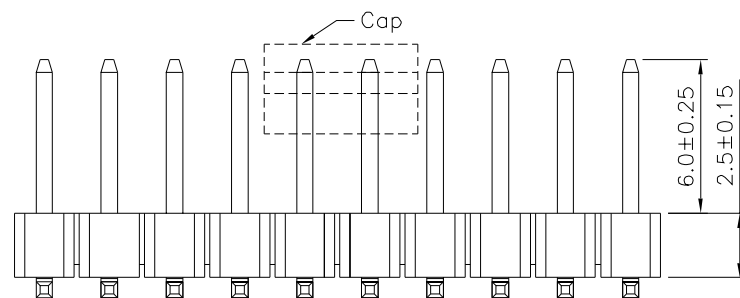

⚠

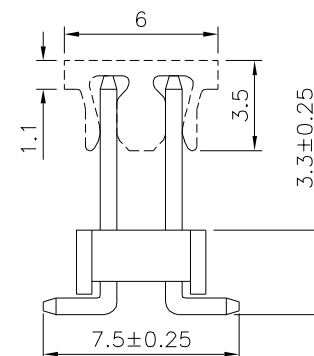

⚠

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21371

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

REV.


A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE ⚠

X. ±0.30 X.* ±2*
.X ±0.25 .X* ±1.5*
.XX ±0.20 .XX* ±1*
.XXX ±0.15 .XXX* ±0.5*

UNIT

mm



NO. REV.

REVISIONS

CHK

DATE

⚠ A2	Modify Data	HZF	04/06/2024
⚠ A1	Modify Data	HZF	09/30/2016
⚠ A0	NEW RELEASE	HZF	01/03/2014