
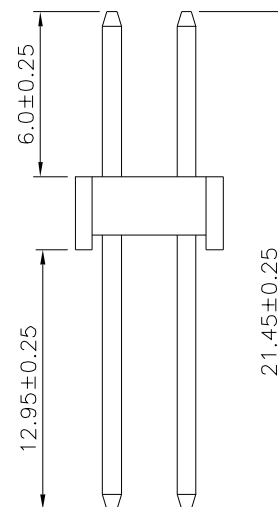
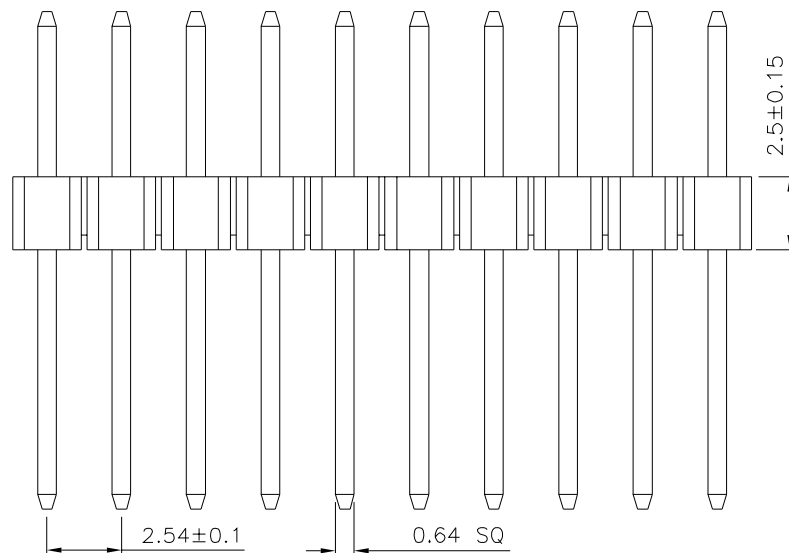


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

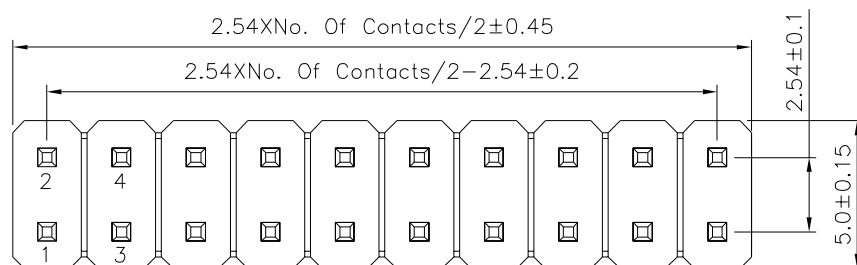

SPECIFICATION

Current Rating:3 Amps
Withstand Voltage:1000Vmin. AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30G.F.(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21425

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25	X.* $\pm 2^{\circ}$
.X ± 0.20	.X* $\pm 1.5^{\circ}$
.XX ± 0.15	.XX* $\pm 1^{\circ}$
.XXX ± 0.10	.XXX* $\pm 0.5^{\circ}$

UNIT
mm



NO.

REV.

AO

NEW RELEASE

REVISIONS

HZF

CHK

01/24/2018

DATE