

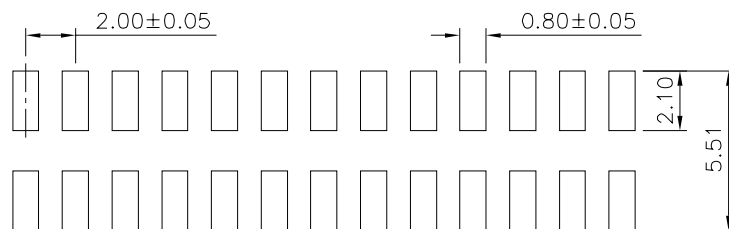


SPECIFICATION

Current Rating:2 Amp
 Withstand Voltage:500V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Housing:PA6T+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

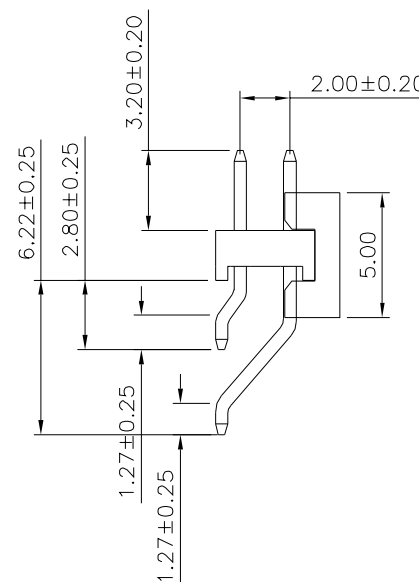

Recommended P.C.B. Layout

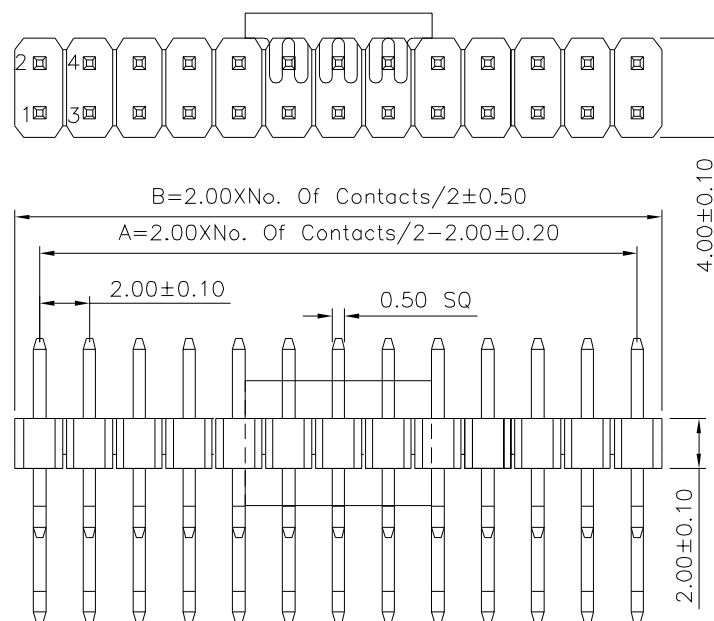

Pin	A	B	Pin	A	B
02	---	2.00	42	40.00	42.00
04	2.00	4.00	44	42.00	44.00
06	4.00	6.00	46	44.00	46.00
08	6.00	8.00	48	46.00	48.00
10	8.00	10.00	50	48.00	50.00
12	10.00	12.00	52	50.00	52.00
14	12.00	14.00	54	52.00	54.00
16	14.00	16.00	56	54.00	56.00
18	16.00	18.00	58	56.00	58.00
20	18.00	20.00	60	58.00	60.00
22	20.00	22.00	62	60.00	62.00
24	22.00	24.00	64	62.00	64.00
26	24.00	26.00	66	64.00	66.00
28	26.00	28.00	68	66.00	68.00
30	28.00	30.00	70	68.00	70.00
32	30.00	32.00	72	70.00	72.00
34	32.00	34.00	74	72.00	74.00
36	34.00	36.00	76	74.00	76.00
38	36.00	38.00	78	76.00	78.00
40	38.00	40.00	80	78.00	80.00

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 21480

APPROVED BY
 MEI
 CHECKED BY
 HZF
 DRAWING BY
 CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ±0.30
 .XX ±0.20

SCALE NONE

REV. A0

UNIT mm



NO. REV.

NEW RELEASE

REVISIONS

CHK HZF
 DATE 06/26/2016