


SPECIFICATION

Current Rating:1A Max.
Withstanding Voltage:500V AC/Minute
Contact Resistance:30 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
At 500V DC

Mating Force:4.0 Kgf Max.
Unmating Force:1.0 Kgf Min.
Temperature Range:-55°C~+105°C
RoHS Compliant

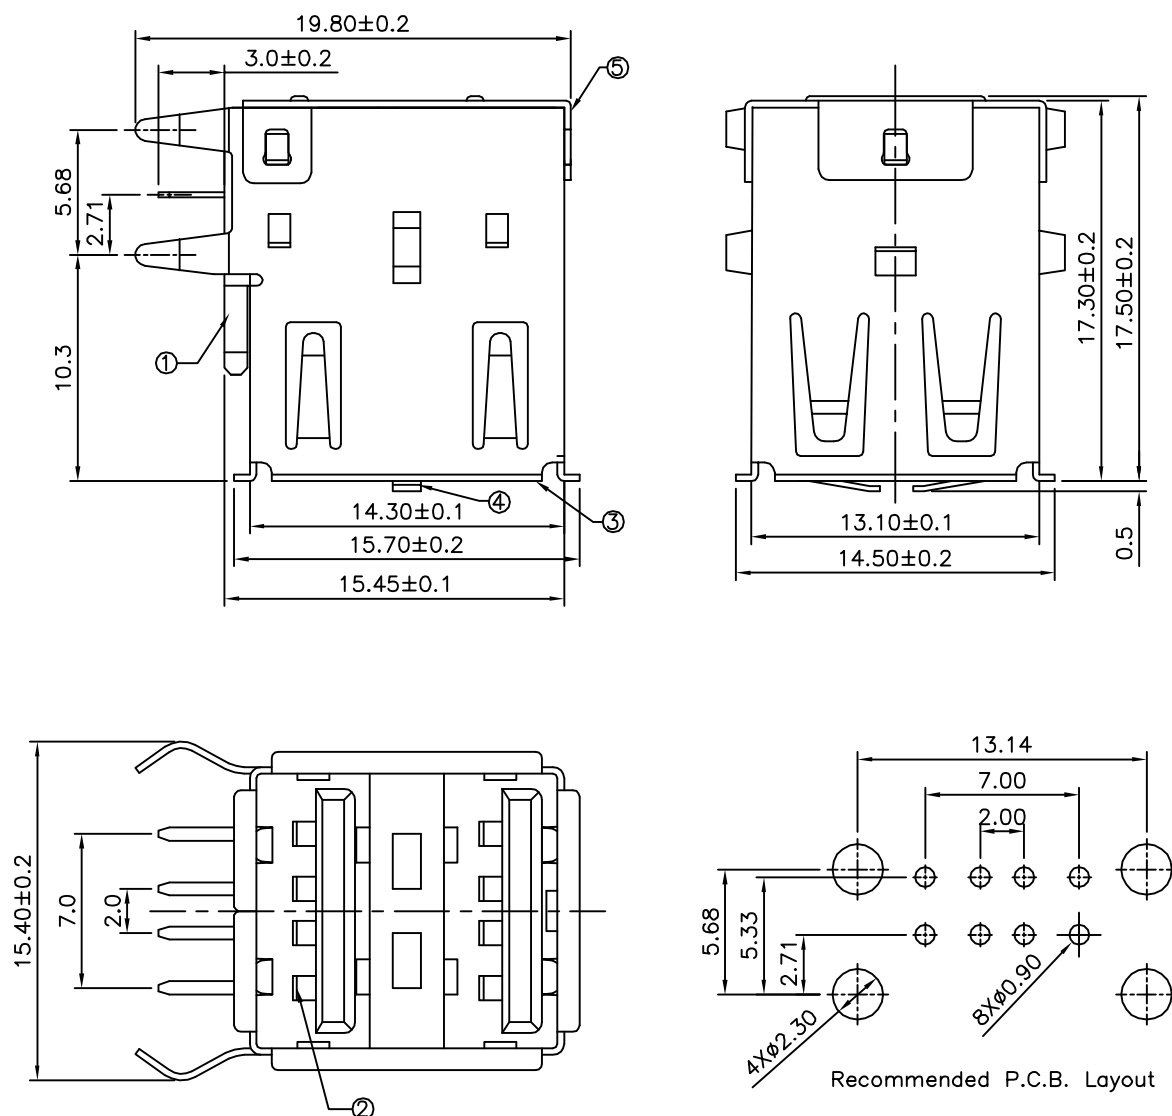

⑤	Shell-C	SPCC	Nickel Plated	1
④	Shell-B	C2680	Nickel Plated	1
③	Shell-A	C2680	Nickel Plated	1
②	Terminal	C5191		8
①	Housing	PBT(UL94V-0)	10106:White 18593:Black	1
No.	Description	Material	Remark	Q'ty

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21487

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ±0.3 X* ±2.0°
.XX ±0.2 .X* ±1.0°
.XX* ±0.5°

SCALE

NONE

REV.

A0

UNIT

mm



△ A0
NO. REV.

NEW RELEASE

REVISIONS

HZF

CHK

03/29/2015

DATE