

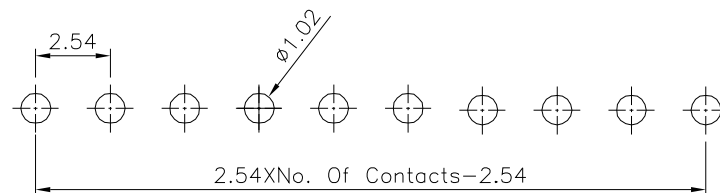
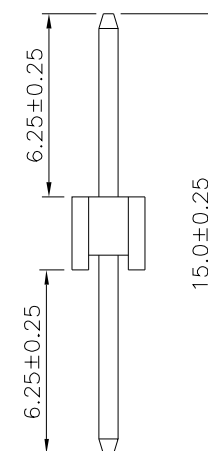


SPECIFICATION

Current Rating:3 Amp
 Withstanding Voltage:1000V Min. AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

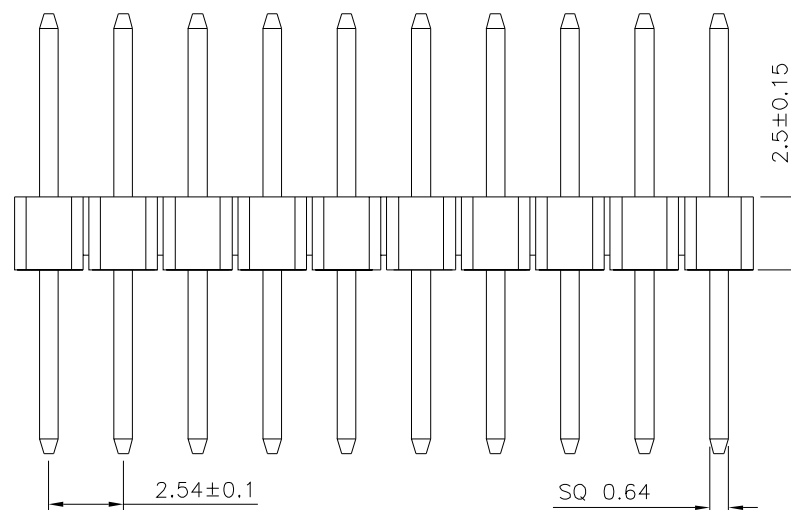

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

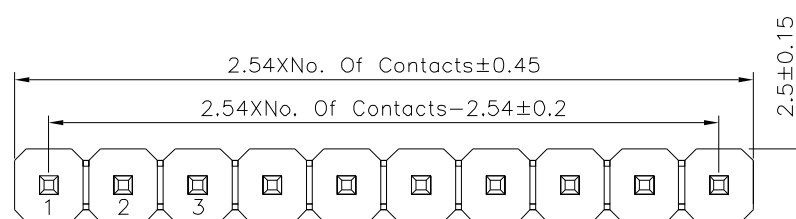

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21515

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.25	X.* ±2°
.X ±0.20	.X ±1.5°
.XX ±0.15	.XX ±1°
.XXX ±0.10	.XXX ±0.5°

SCALE

NONE

REV.

A0

UNIT

mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

01/04/2019