


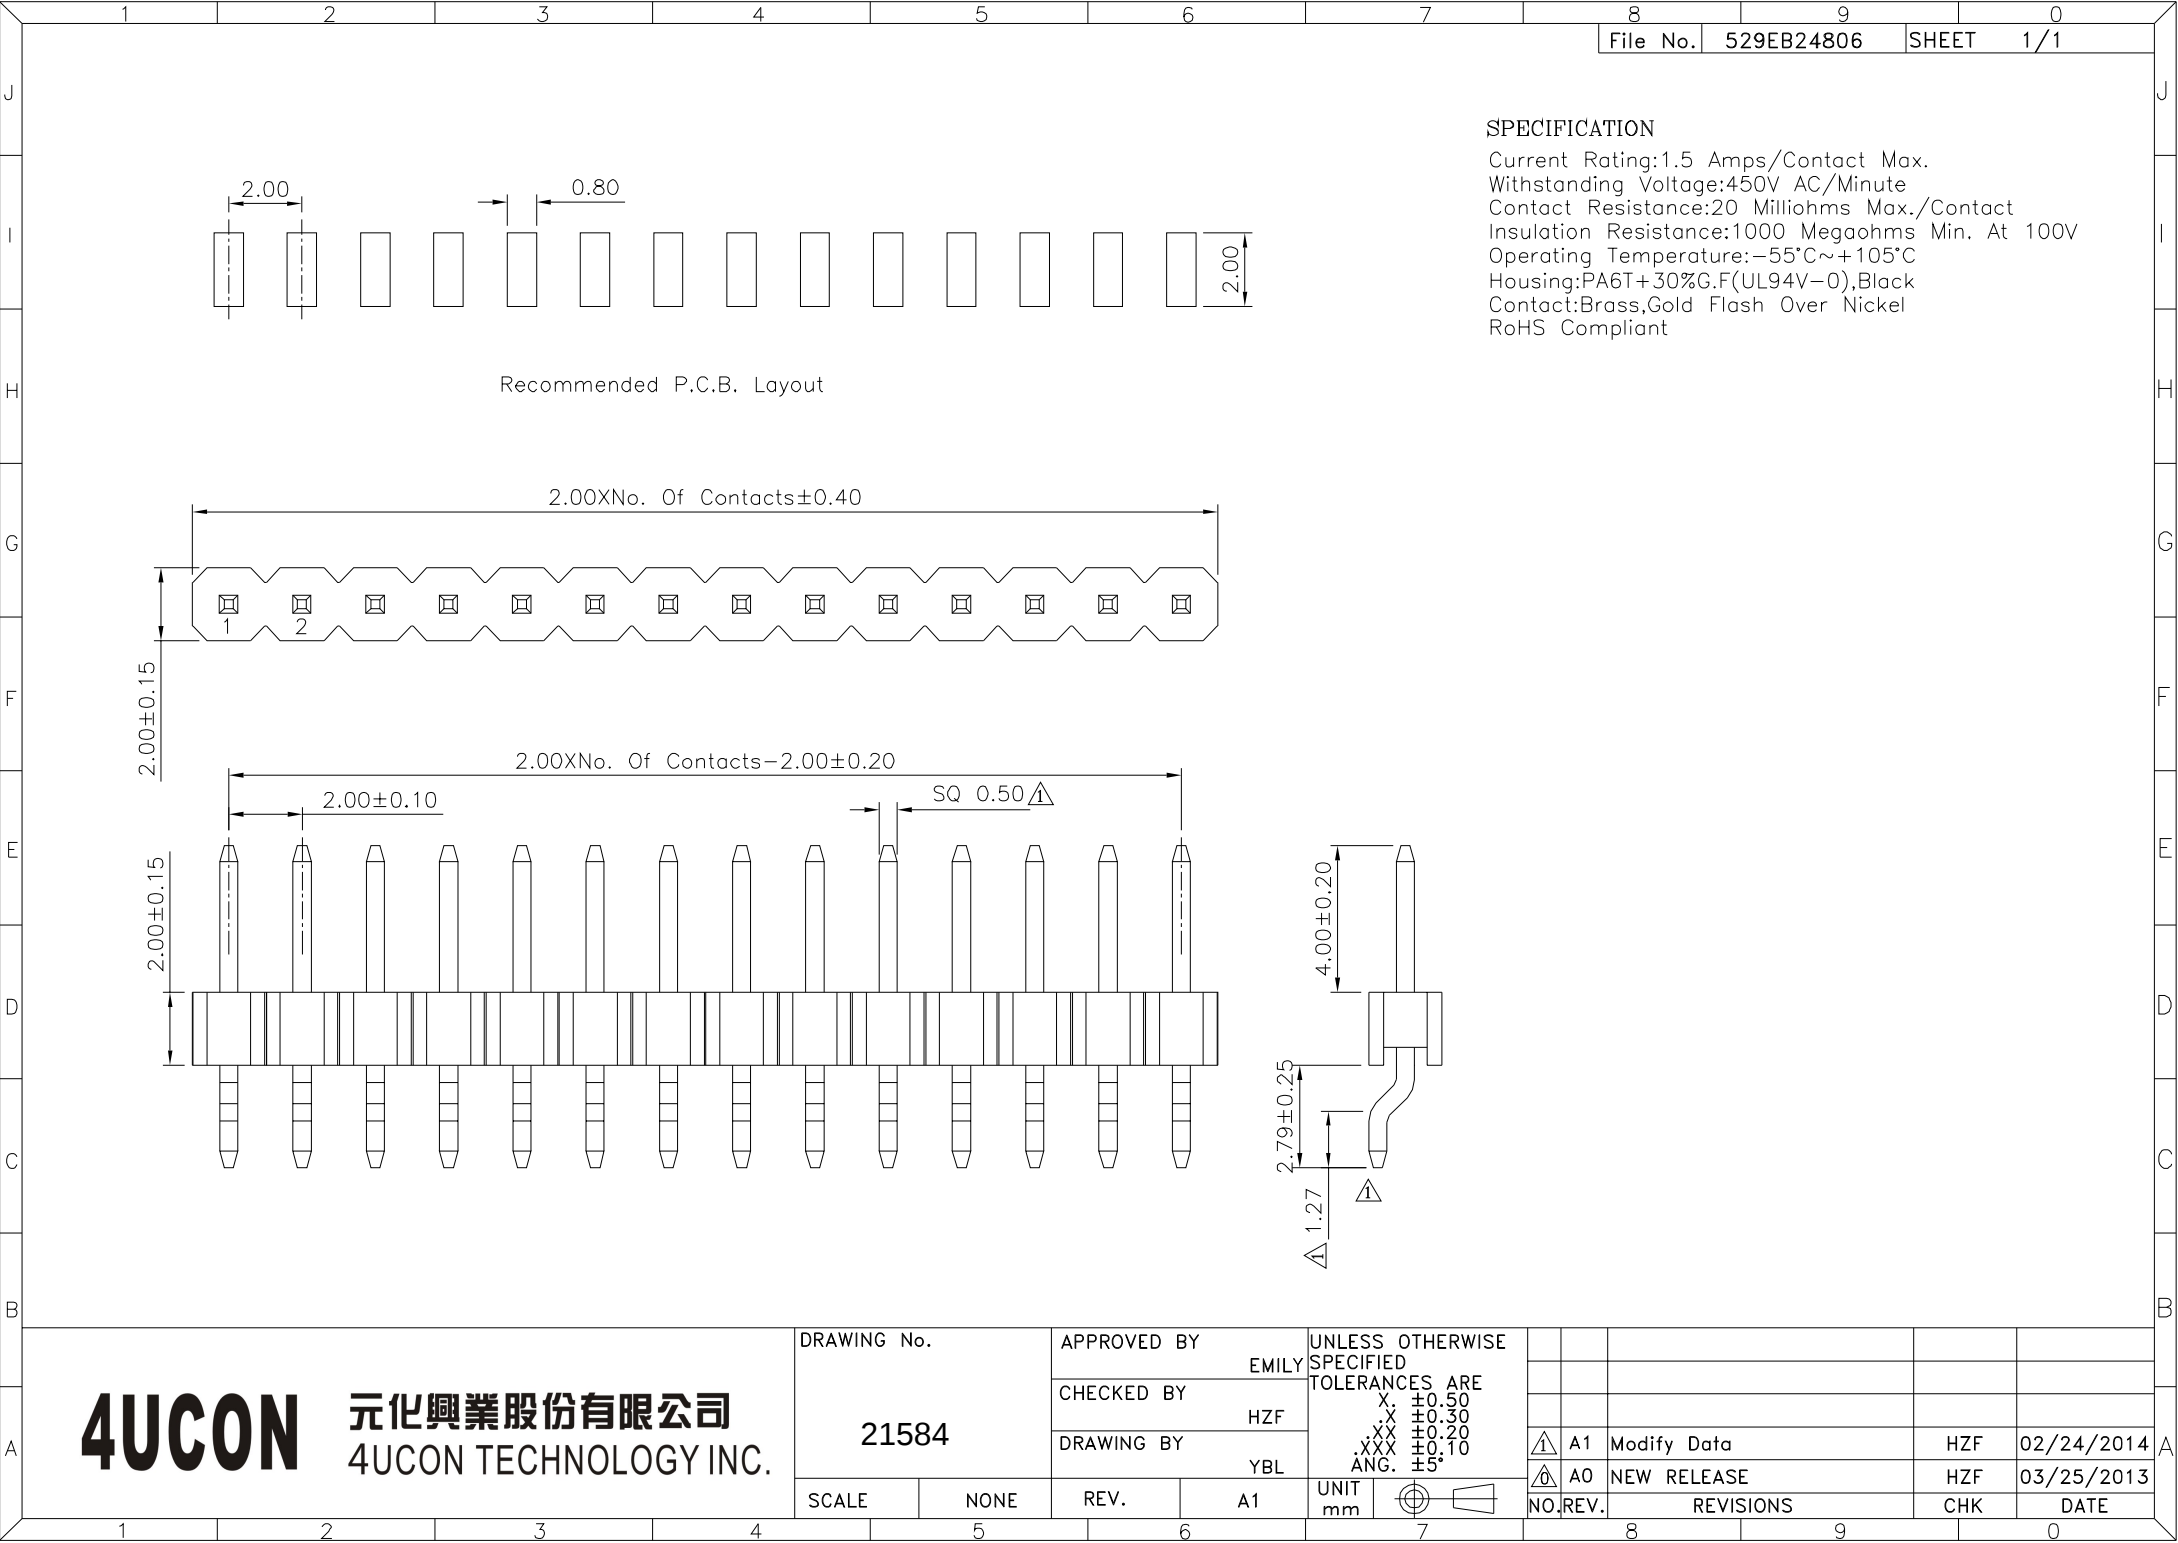

SPECIFICATION

Current Rating:1.5 Amps/Contact Max.
Withstanding Voltage:450V AC/Minute
Contact Resistance:20 Milliohms Max./Contact
Insulation Resistance:1000 Megaohms Min. At 100V
Operating Temperature:-55°C~+105°C
Housing:PA6T+30%G.F(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

Recommended P.C.B. Layout

DRAWING No.		APPROVED BY	
		EMILY	
		CHECKED BY	
21584		HZF	
		DRAWING BY	
		YBL	
SCALE	NONE	REV.	A1

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE		UNIT	mm
		ANG. ±5°	

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	HZF	02/24/2014
△	A0	NEW RELEASE	HZF	03/25/2013