
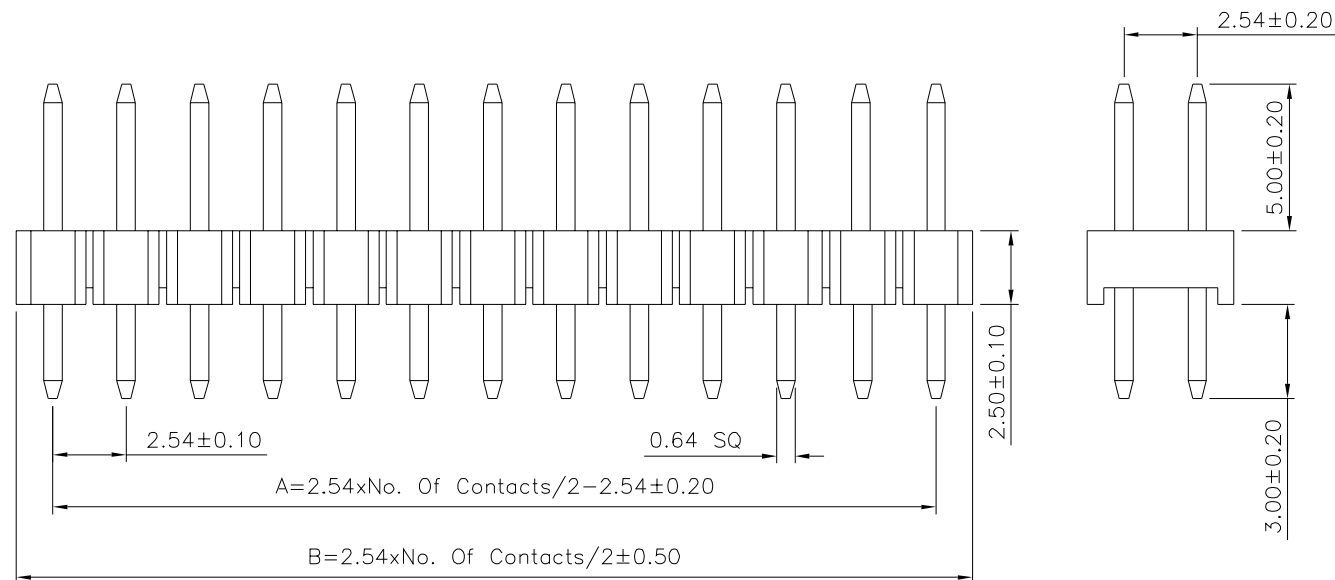


Recommended P.C.B. Layout
(PCB Board Tolerance ± 0.05)

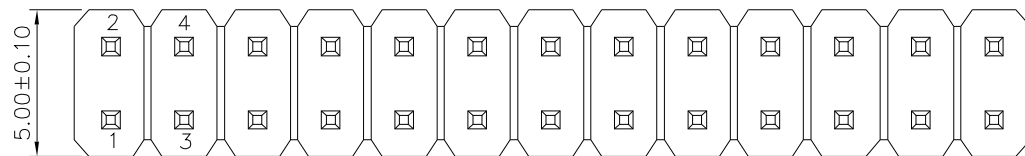

Pin	A	B	Pin	A	B
02		2.54	42	50.80	53.34
04	2.54	5.08	44	53.34	55.88
06	5.08	7.62	46	55.88	58.42
08	7.62	10.16	48	58.42	60.96
10	10.16	12.70	50	60.96	63.50
12	12.70	15.24	52	63.50	66.04
14	15.24	17.78	54	66.04	68.58
16	17.78	20.32	56	68.58	71.12
18	20.32	22.86	58	71.12	73.66
20	22.86	25.40	60	73.66	76.20
22	25.40	27.94	62	76.20	78.74
24	27.94	30.48	64	78.74	81.28
26	30.48	33.02	66	81.28	83.82
28	33.02	35.56	68	83.82	86.36
30	35.56	38.10	70	86.36	88.90
32	38.10	40.64	72	88.90	91.44
34	40.64	43.18	74	91.44	93.98
36	43.18	45.72	76	93.98	96.52
38	45.72	48.26	78	96.52	99.06
40	48.26	50.80	80	99.06	101.60

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No. 1

21588

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

.X ± 0.30
.XX ± 0.20

UNIT	mm
------	----



SPECIFICATION

Current Rating:3Amp

Withstand Voltage:500V AC/Minute

Contact Resistance: 20 Milliohms Max.

Insulation Resistance:1000 Megaohms Min.

Operation Temperature: $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

Contact: Brass, Gold Plated Over Nickel

Insulator:PBT+30%G.F. UL94V-0,Black

RoHS Compliant

1	A1	Modify Data	HZF	04/02/2019
---	----	-------------	-----	------------

0	A0	NEW RELEASE	HZF	12/17/2008
---	----	-------------	-----	------------

NO.	REV.	REVISIONS	CHK	DATE
-----	------	-----------	-----	------