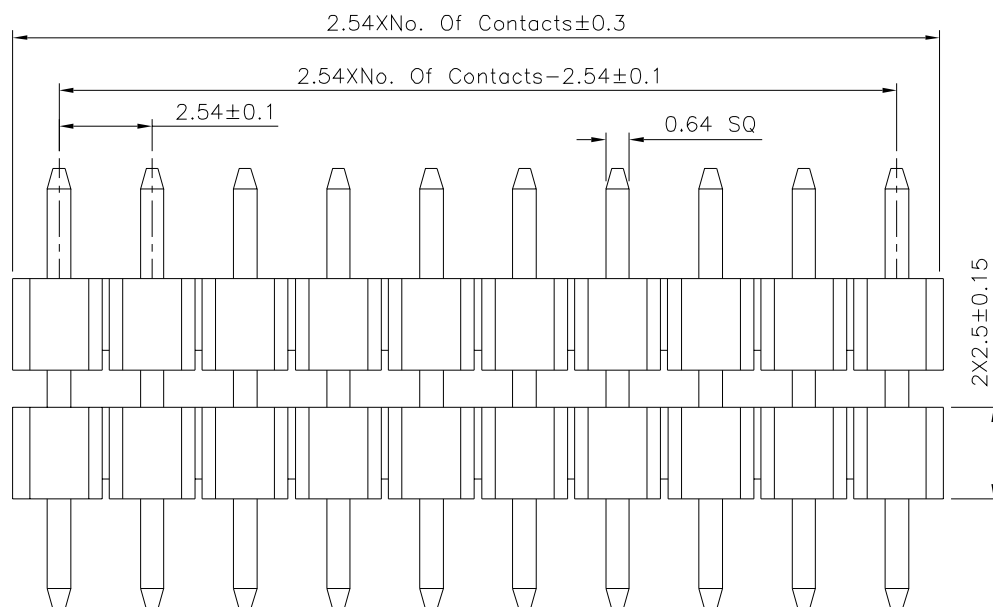
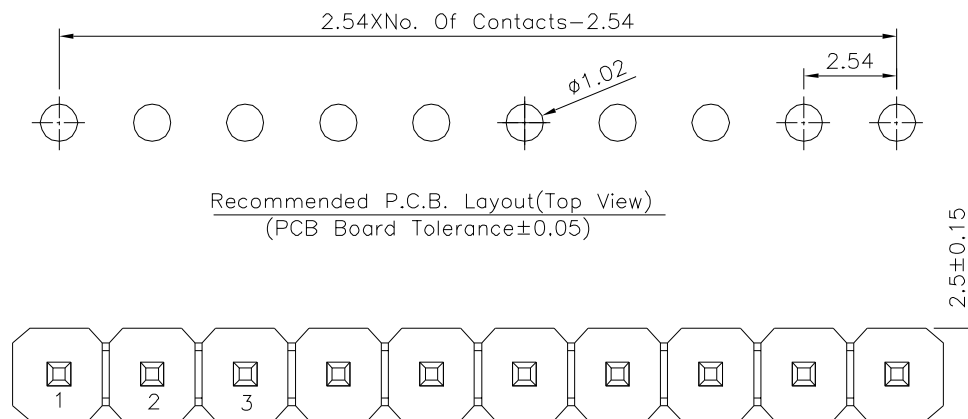


SPECIFICATION

Current Rating:3 Amps
Withstanding Voltage:1000V AC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Insulator:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

21615

SCALE	NONE
-------	------

APPROVED BY

EMILY

CHECKED BY


DRAWING BY

YB

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X.	±0.25	X.*	±2°
.X	±0.20	.X*	±1.5°
.XX	±0.15	.XX*	±1°
.XXX	±0.10	.XXX*	±0.5°

UNIT	mm
------	----



5°		AO
	NO. REV.	

NEW RELEASE

REVISIONS

HZF

07/10/2013

NO.	REV.
-----	------

REVISIONS

CHK

DATE
