
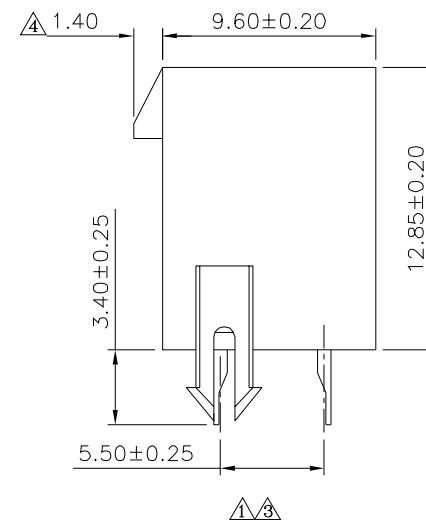
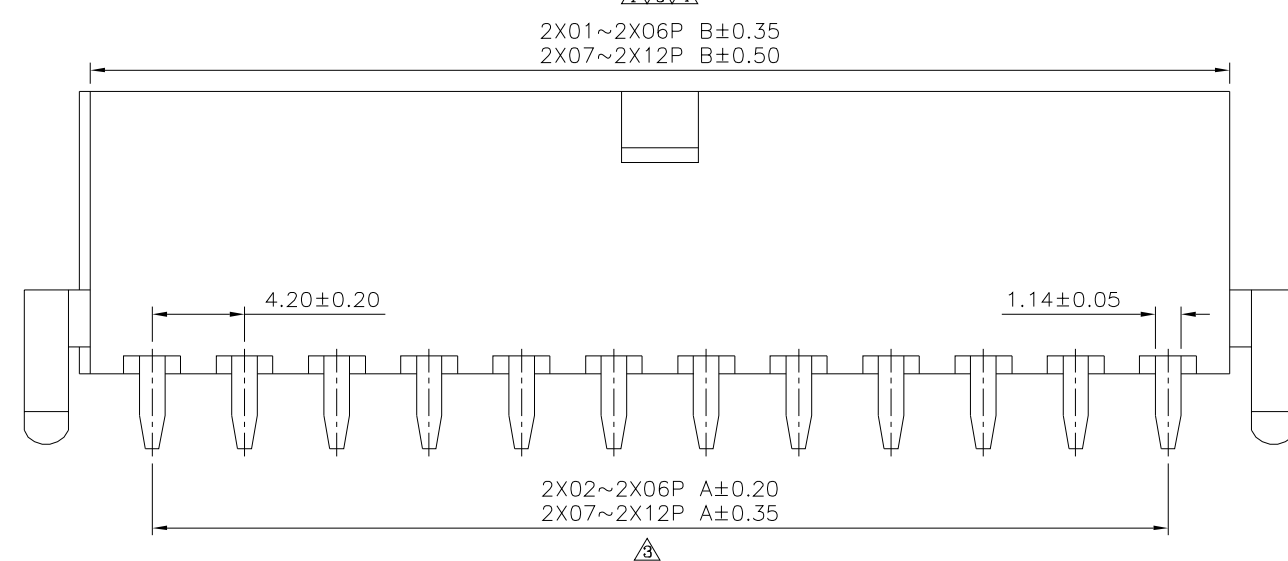
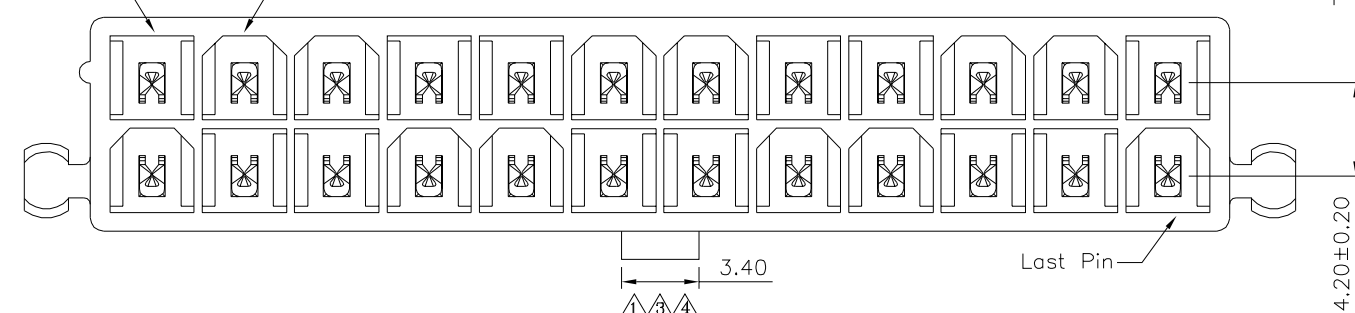


3/2 SPECIFICATION
 Current Rating:7A AC/DC
 Voltage Rating:600V AC/DC
 Withstanding Voltage:1500V AC/Minute
 Insulation Resistance:1000 Megaohms Min.
 Contact Resistance:10 Milliohms Max.
 Temperature Range:-25°C~+85°C
 Insulator:PA66,UL94V-2,Nature Color
 Contact:Brass,Tin Plated Over Nickel
 RoHS Compliant

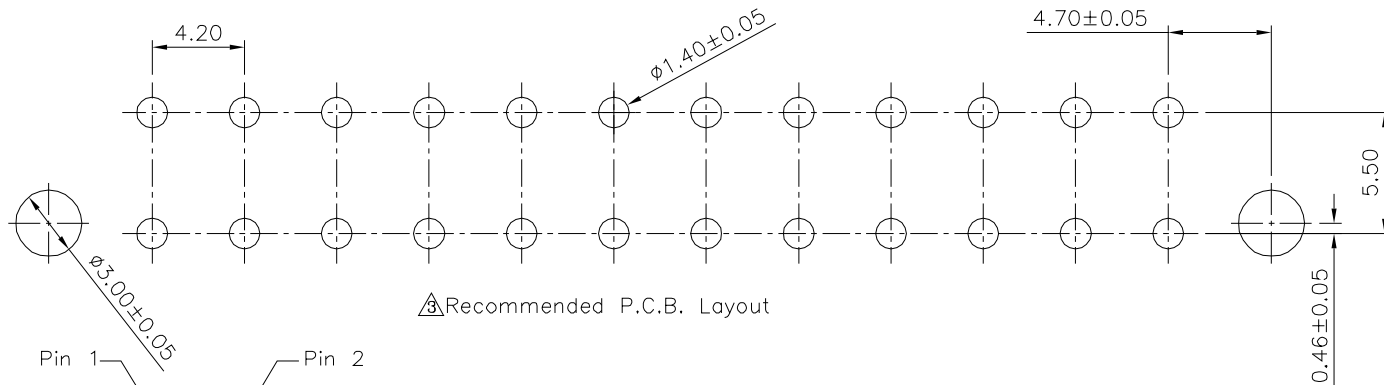

Pin	A	B
02	4.20	5.80
04	8.40	10.00
06	12.60	14.20
08	16.80	18.40
10	21.00	22.60
12	25.20	26.80
14	29.40	31.00
16	33.60	35.20
18	37.80	39.40
20	42.00	43.60
22	46.20	47.80
24	50.40	52.00

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 3/2

21649

SCALE NONE

APPROVED BY MEI

CHECKED BY HZF


DRAWING BY HAO

REV. A4


UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 X. ±0.30
 .X ±0.25
 .XX ±0.20
 .XXX ±0.15

UNIT mm


NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	07/30/2015
3	A3	Modify Data	HZF	03/24/2015
2	A2	Modify Data	HZF	03/14/2013
1	A1	Modify Data	HZF	10/09/2012
0	A0	NEW RELEASE	HZF	05/14/2011

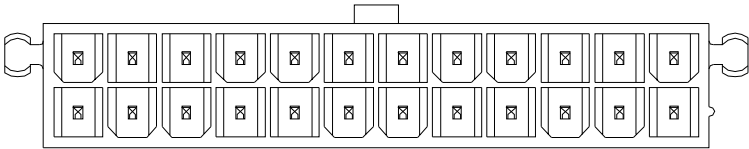


2X12P

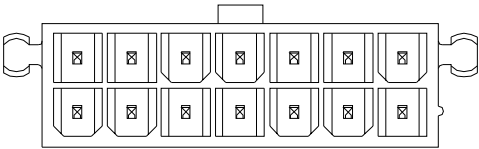


2X7P




2X3P

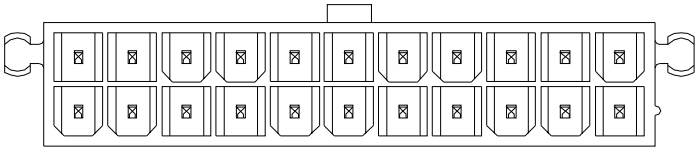


2X11P

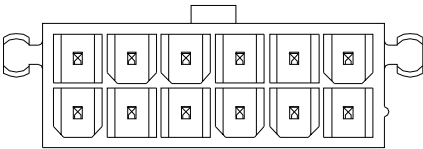


2X6P




2X2P

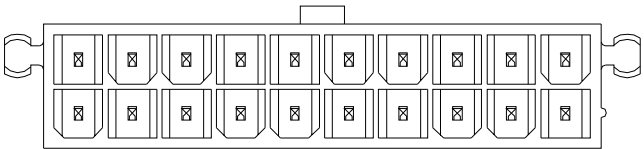


2X10P

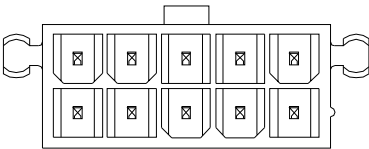


2X5P




2X01P

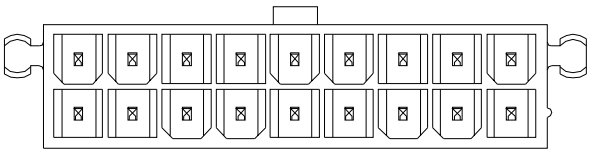

2X9P



2X4P

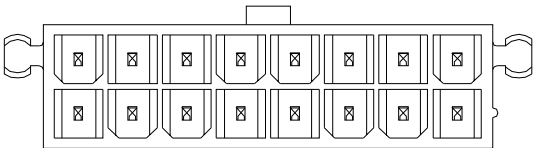

2X8P

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 21649

21649

SCALE NONE

APPROVED BY
MEI


CHECKED BY
HZF

DRAWING BY
HAO

REV. A4

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.015

UNIT
mm



	A4	Modify Data	HZF	07/30/2015
	A3	Modify Data	HZF	03/24/2015
	A2	Modify Data	HZF	03/14/2013
	A1	Modify Data	HZF	10/09/2012
	A0	NEW RELEASE	HZF	05/14/2011
NO. REV.	REVISIONS		CHK	DATE