

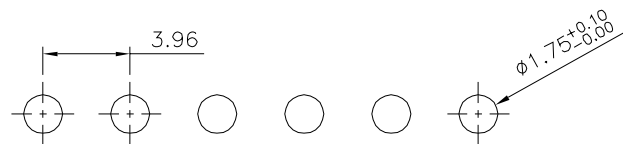
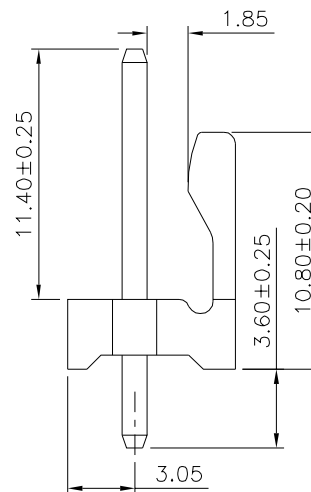


SPECIFICATION

Current Rating:7.0A
 Withstand Voltage:1000V AC/Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 ⚠ Operation Temperature:-40°C~+105°C
 Contact:Brass,Tin Plated Over Nickel
 Insulator:PA66+10%G.F.(UL94V-0),White
 RoHS Compliant

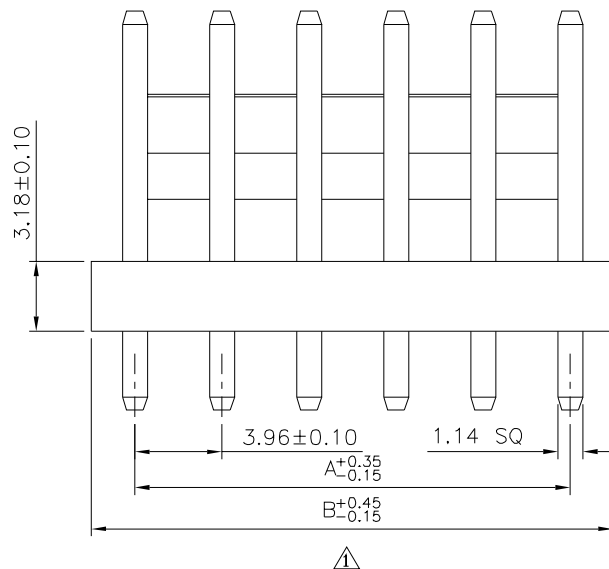

Recommended P.C.B. Layout(Top Side)
 (PCB Board Tolerance ± 0.05)

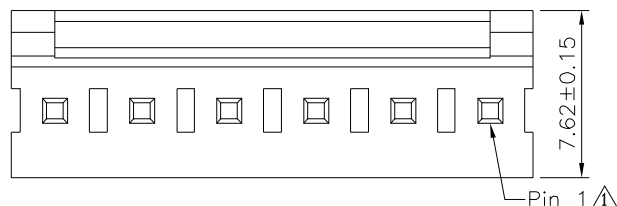

Pin	A	B
02	3.96	7.92
03	7.92	11.88
04	11.88	15.84
05	15.84	19.80
06	19.80	23.76
07	23.76	27.72
08	27.72	31.68
09	31.68	35.64
10	35.64	39.60
11	39.60	43.56
12	43.56	47.52
13	47.52	51.48
14	51.48	55.44
15	55.44	59.40
16	59.40	63.36
17	63.36	67.32
18	67.32	71.28
19	71.28	75.24
20	75.24	79.20

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.
 21669

APPROVED BY MEI
 CHECKED BY HZF
 DRAWING BY CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 .X ± 0.40
 .XX ± 0.25
 .XXX ± 0.15
 ANG. $\pm 3^\circ$

SCALE NONE REV. B1 UNIT mm

NO. REV. REVISIONS CHK DATE

⚠ B1	Modify Data	HZF	11/10/2016
⚠ B0	NEW RELEASE	HZF	10/12/2015