

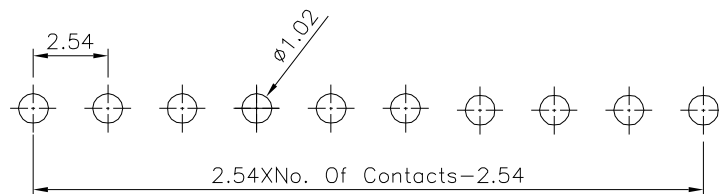
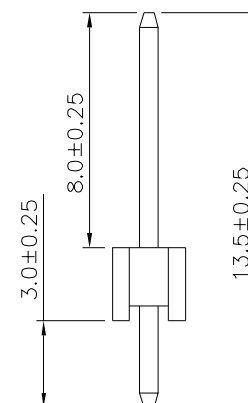


SPECIFICATION

Current Rating:3 Amp
 Withstanding Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA6T(UL94V-0),Black
 RoHS Compliant

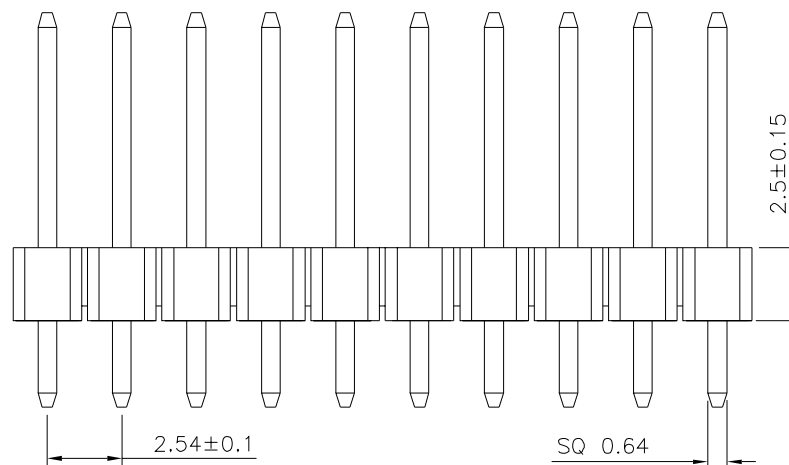

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance ± 0.05)

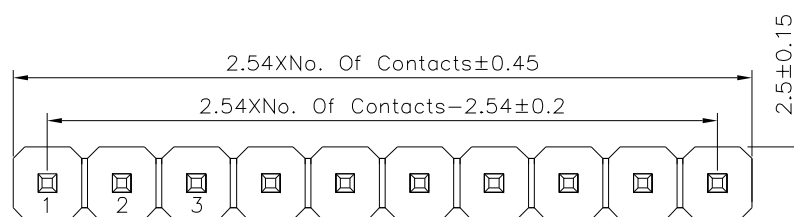

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21692

APPROVED BY

MEI

CHECKED BY


HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE
 >80 ± 1.20 $\pm 0.5^*$
 25~80 ± 0.15 $\pm 1^*$
 5~25 ± 0.10 $\pm 1.5^*$
 <5 ± 0.05 $\pm 2^*$

UNIT
mm



NO. REV.

A0 NEW RELEASE

HZF

11/21/2017

REVISIONS

CHK

DATE