




SPECIFICATION





Current Rating:1.0A AC/DC
Voltage Rating:125V AC/DC
Withstanding Voltage:250V AC/Minute
Insulation Resistance:100 Megaohms Min.
Temperature Range:-25°C~+85°C
Insulator:PA66(UL94V-0)
RoHS Compliant

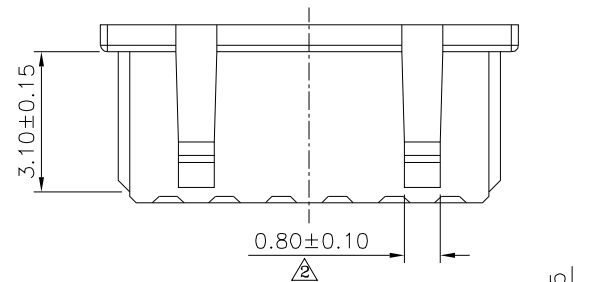

2Pin

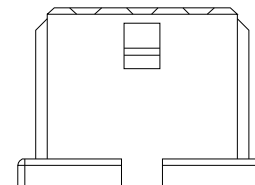


3Pin

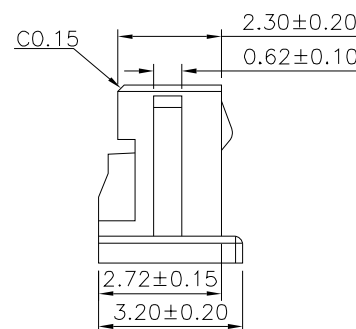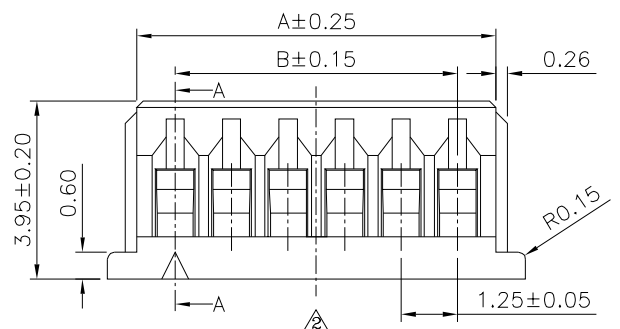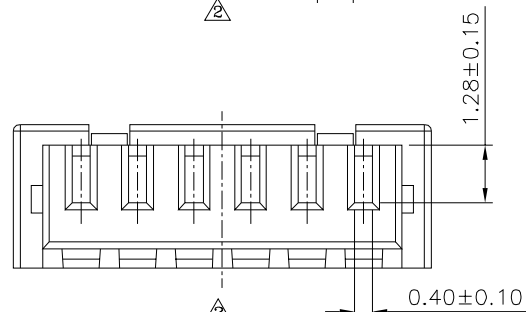

Section A-A

Pin	A	B
02	3.00	1.25
03	4.25	2.50
04	5.50	3.75
05	6.75	5.00
06	8.00	6.25
07	9.25	7.50
08	10.50	8.75
09	11.75	10.00
10	13.00	11.25
11	14.25	12.50
12	15.50	13.75
13	16.75	15.00
14	18.00	16.25
15	19.25	17.50

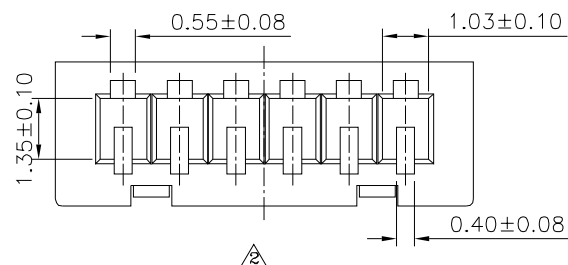

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21729

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.05
ANG. ±1°

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
	A2	Modify Data	HZF	05/22/2026
	A1	Modify Data	HZF	04/17/2019
	A0	NEW RELEASE	HZF	12/30/2015