
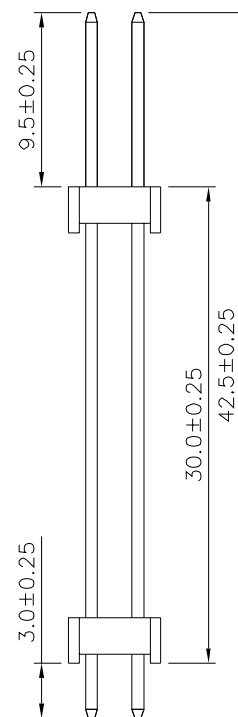


SPECIFICATION

Current Rating:3.0A
 Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-O),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

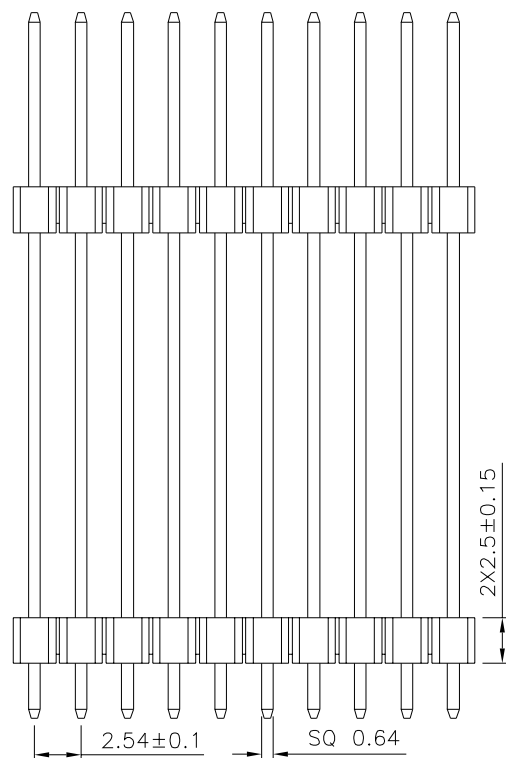

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21739

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X: ±0.25 X*: ±2*
 .X: ±0.20 .X*: ±1.5*
 .XX: ±0.15 .XX*: ±1*
 .XXX: ±0.10 .XXX*: ±0.5*

SCALE

NONE

REV.

A0

UNIT

mm

NO.

REV.

NEW RELEASE

REVISIONS

CHK

DATE

10/29/2019