

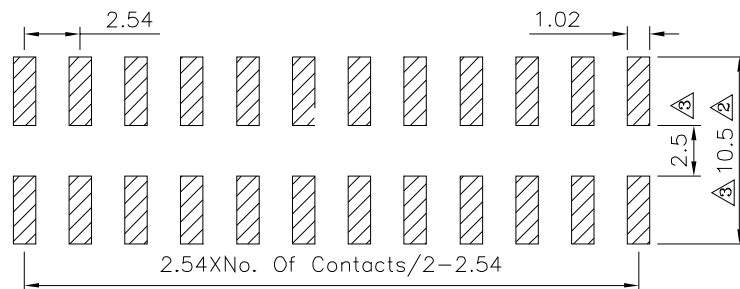
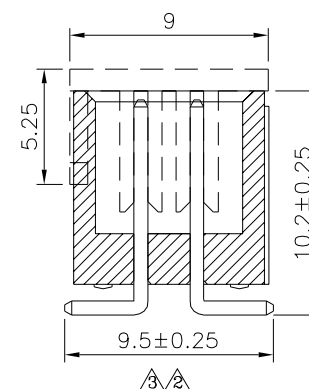


SPECIFICATION

Current Rating:3A
 ⚠ Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operation Temperature:-40°C~+105°C
 ⚠ Insulator:PA9T(UL94V-0),Black
 Contact:Brass,Gold Flash Over Nickel
 RoHS Compliant

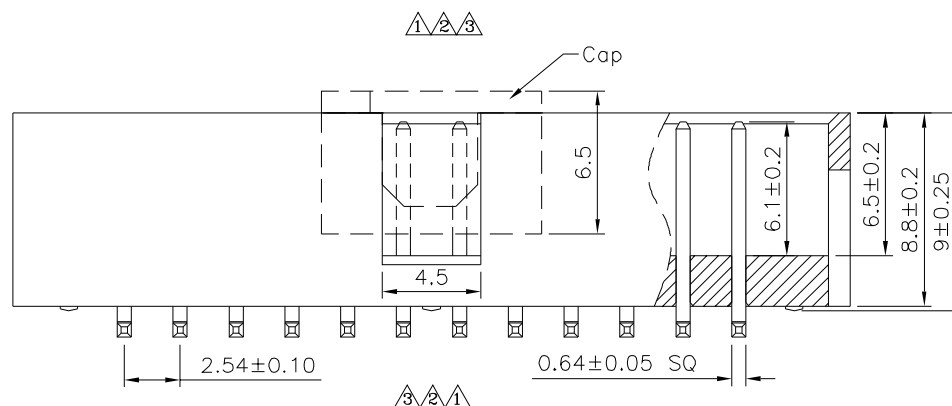

Recommended P.C.B. Layout
 PCB Tolerance:±0.05 (Top View)

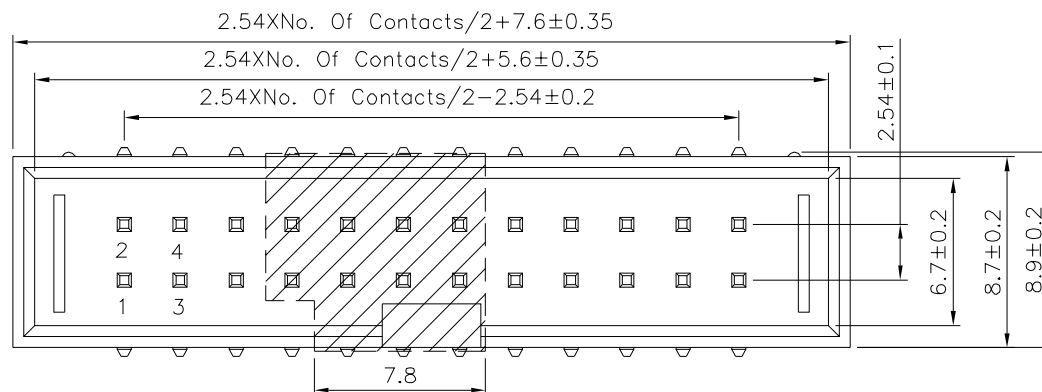

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21756

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY

Michelle Lee


REV.

A3

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE ⚠

X. ±0.30 X.* ±2*
 .X ±0.25 .X* ±1.5*
 .XX ±0.20 .XX* ±1.0*
 .XXX ±0.15 .XXX* ±0.5*

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
⚠	A3	Modify Data	HZF	06/27/2026
⚠	A2	Modify Data	HZF	05/30/2023
⚠	A1	Modify Data	HZF	01/14/2019
⚠	A0	NEW RELEASE	HZF	11/27/2015