
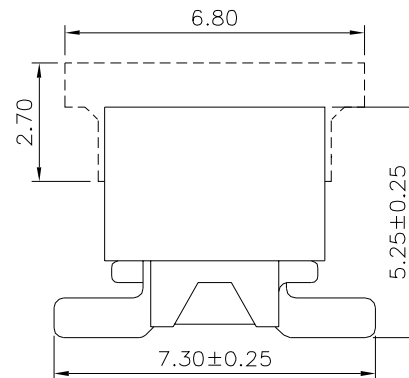


Recommended P.C.B Layout(Top Side)
PCB Board Tolerance:±0.05

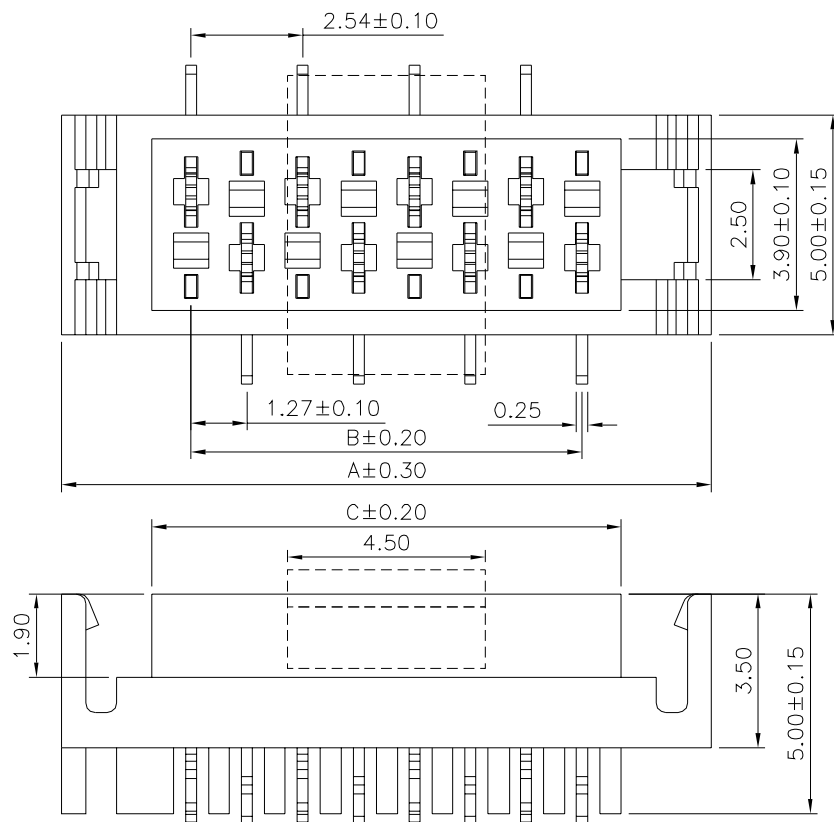

SPECIFICATION

Current Rating:1.0 Amp
Withstand Voltage:500V AC/DC
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:−40°C~105°C
Insulator:PA46+30%G.F.(UL94V−0)
Contact:Phosphor Bronze,Tin Plated Over Nickel
RoHS Compliant

Pin	A	B	C
04	9.70	3.81	5.60
06	12.24	6.35	8.14
08	14.78	8.89	10.68
10	17.32	11.43	13.22
12	19.86	13.97	15.76
14	22.40	16.51	18.30
16	24.94	19.05	20.84
18	27.48	21.59	23.38
20	30.02	24.13	25.92

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21812

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY


CYP

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.40
.XX ±0.25
.XXX ±0.15
ANG. ±3°

UNIT
mm



	A1	Modify Data		HZF	05/10/2016
	A0	NEW RELEASE		HZF	11/05/2015
NO. REV.	REVISIONS		CHK	DATE	