


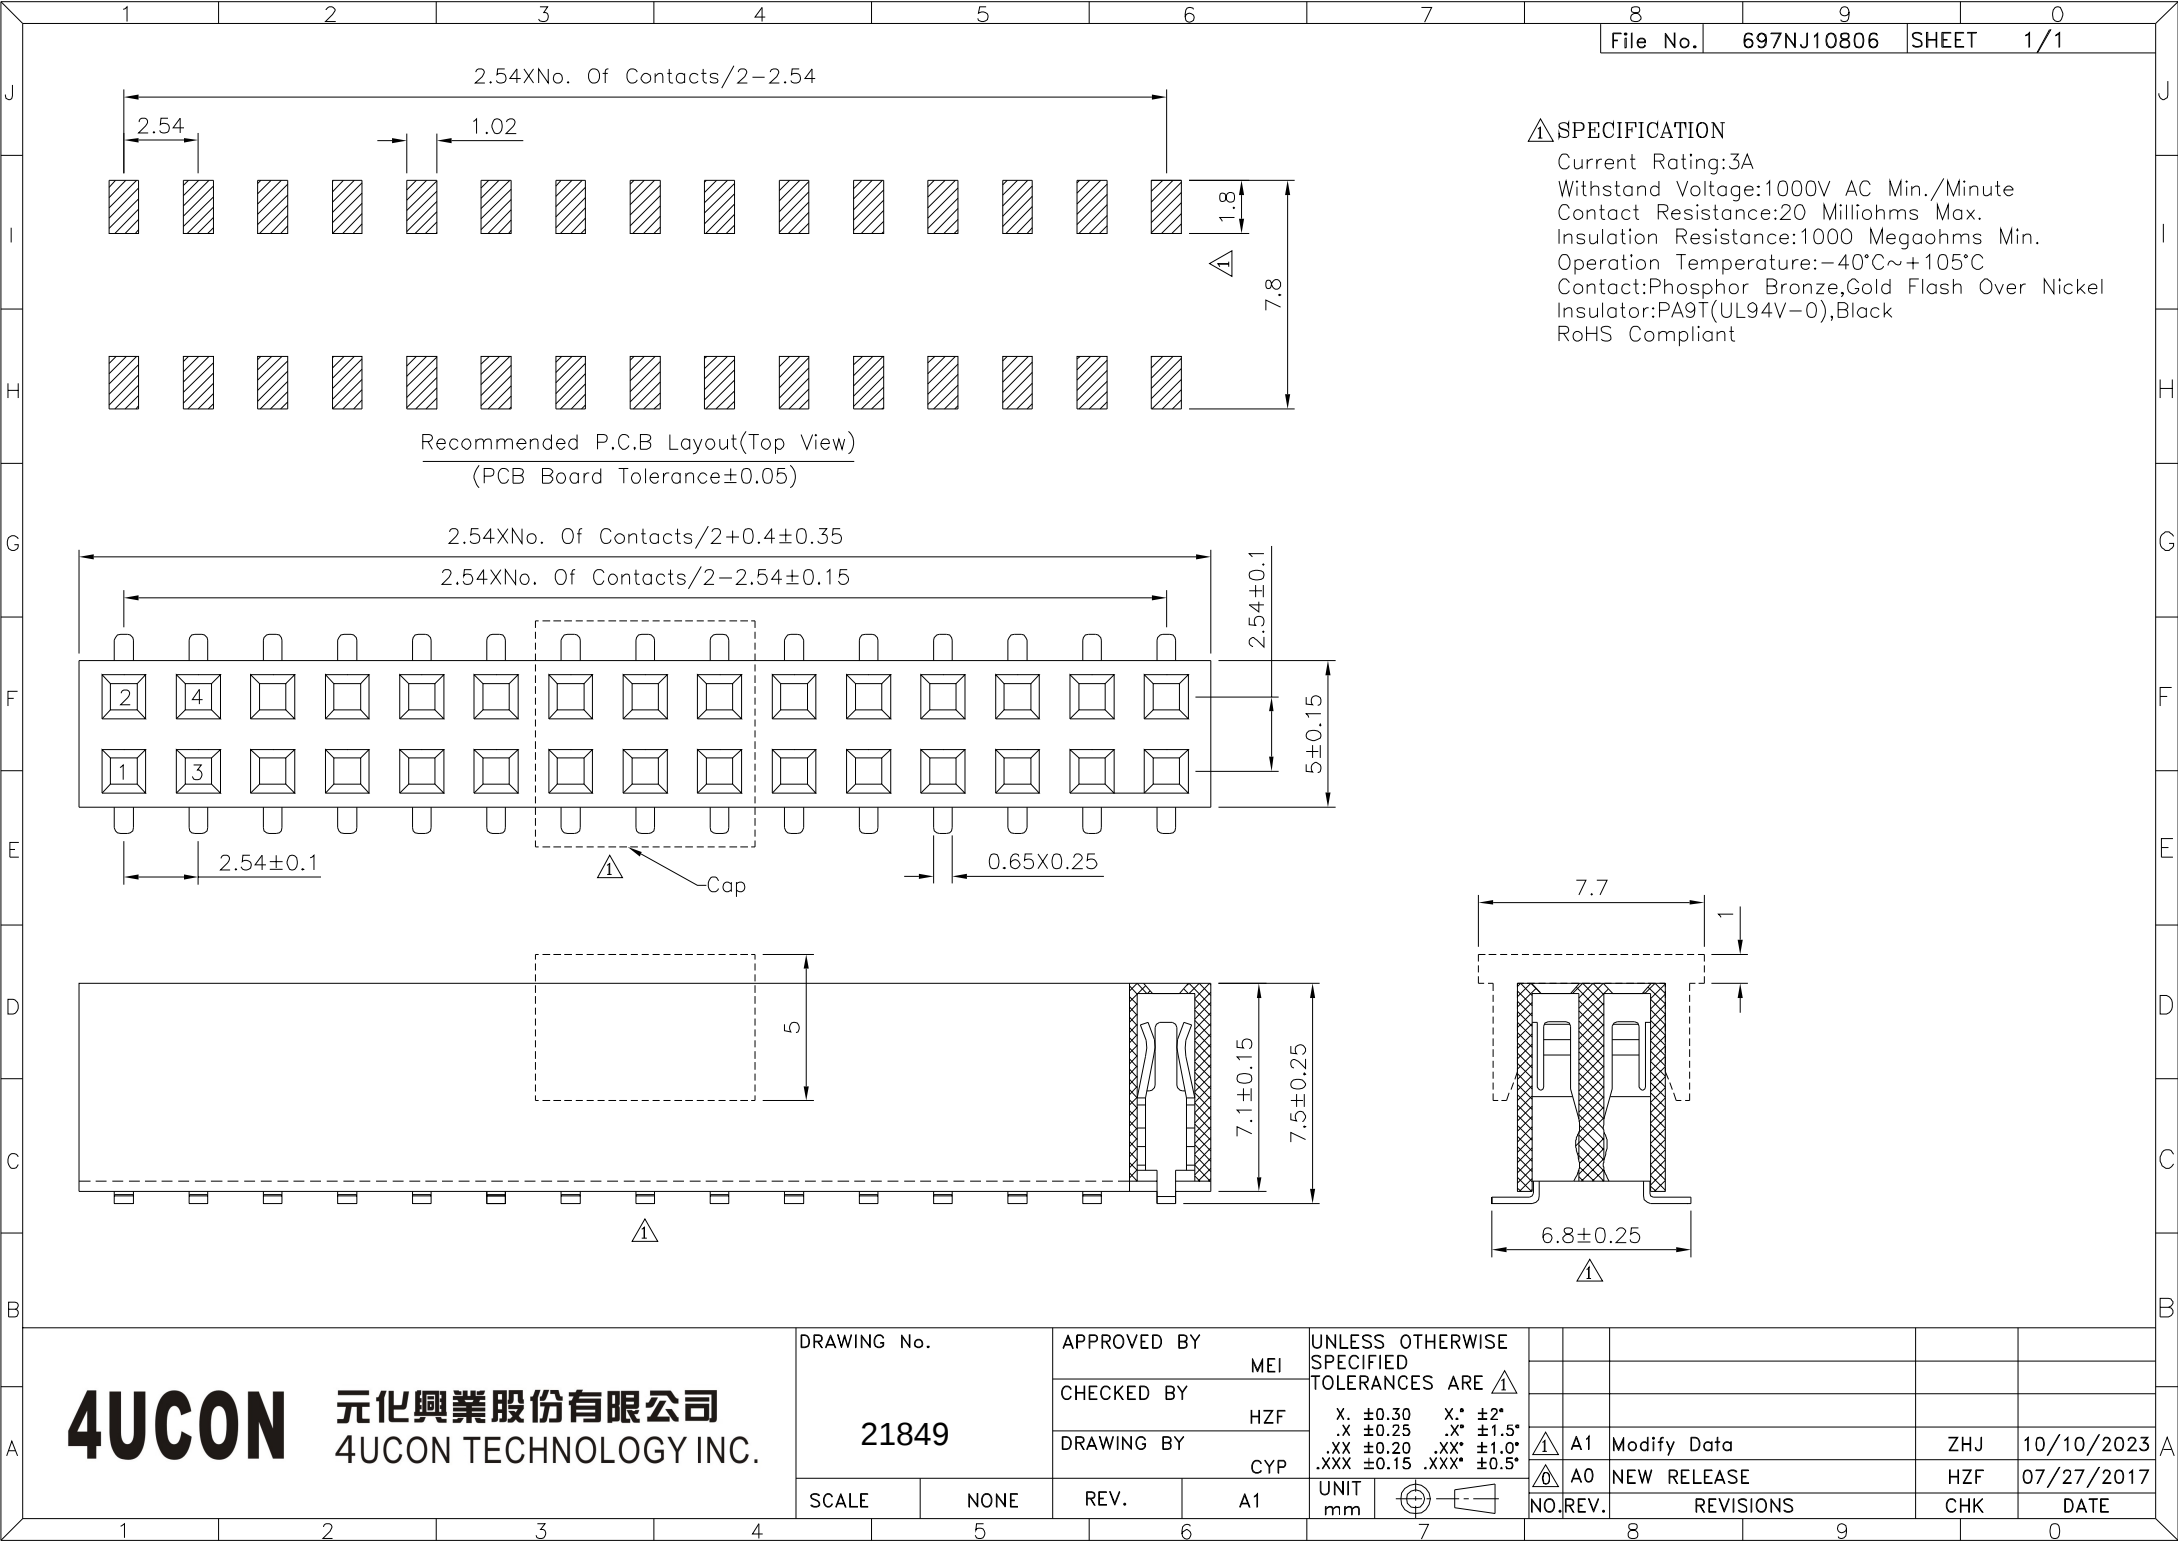

△ SPECIFICATION

Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Phosphor Bronze,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY	
		MEI	
		CHECKED BY	HZF
21849		DRAWING BY	CYP
		SCALE	NONE
REV.		A1	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE △	
X. ±0.30	X.* ±2"
.X ±0.25	.X* ±1.5"
.XX ±0.20	.XX* ±1.0"
.XXX ±0.15	.XXX* ±0.5"
UNIT	mm

NO.	REV.	REVISIONS	CHK	DATE
△	A1	Modify Data	ZHJ	10/10/2023
△	A0	NEW RELEASE	HZF	07/27/2017