

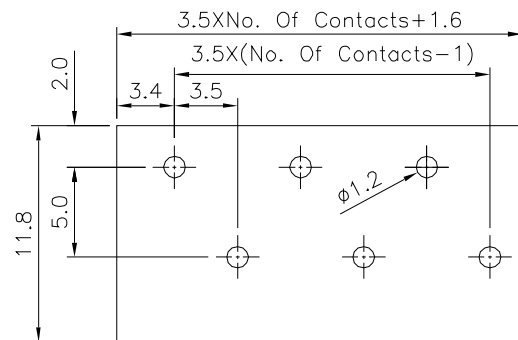
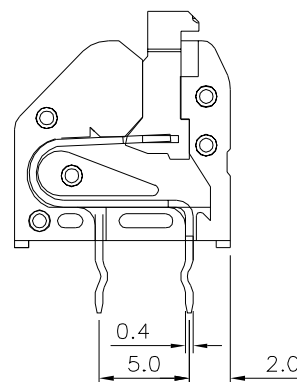


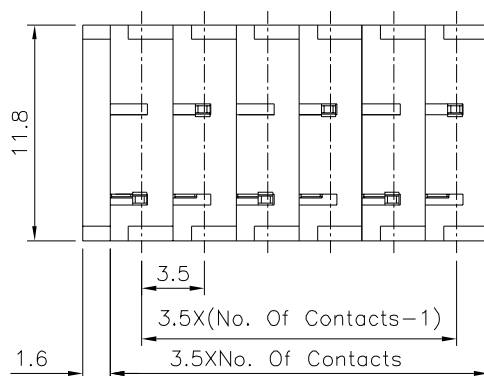

Recommended P.C.B. Layout

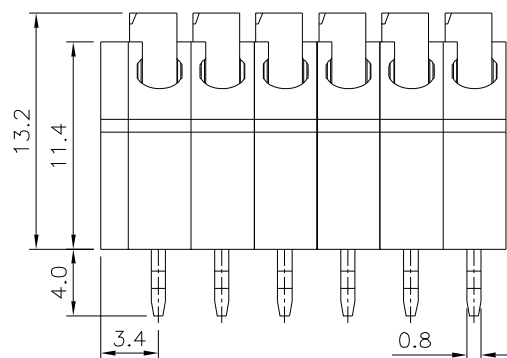

SPECIFICATION

Current Rating:5 Amp/Way Max.

Voltage Rating:300V AC

Withstanding Voltage:2500V AC For 1 Minute

Test Time=60s/1 PCS

Contact Resistance:20 Milliohms Max.

Wire Range:16~20 AWG

Operating Temperature:-40°C~+105°C

Soldering Reliability:Test Temperature=250°C±10°C

5 Seconds Max.

Surface Of Solder Tail:Copper Alloy,Tin Plated

Insulator Body(Housing):Polyamide(UL94V-0),Gray

RoHS Compliant

* 02~24P Available~

4UCON

元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

21896

SCALE

NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE


X. ±0.50

.X ±0.30

.XX ±0.20

ANG. ±1°

UNIT
mm



NO. REV.

REVISIONS

CHK

DATE

A0

NEW RELEASE

HZF

11/21/2019