
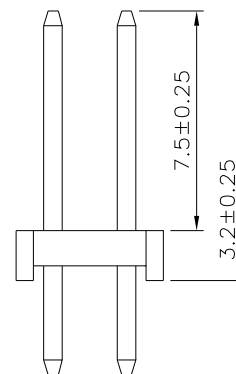
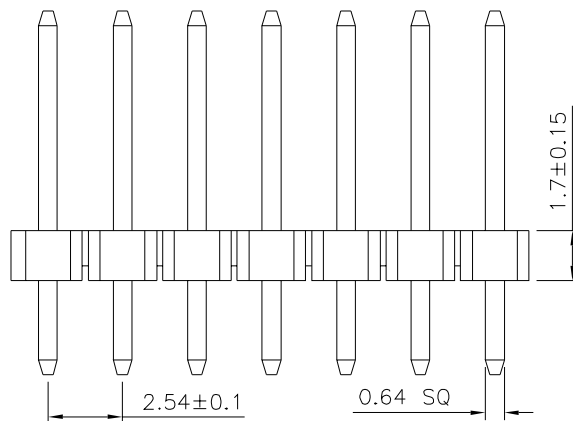


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

SPECIFICATION

Current Rating:3.0 Amp
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass
Gold Flash Over All,Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant

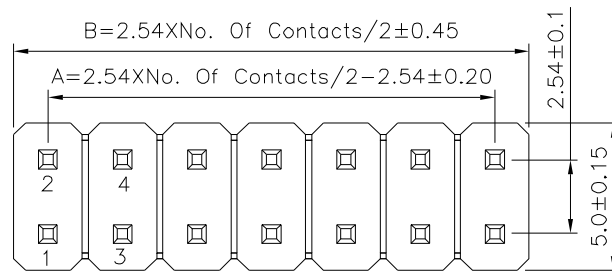

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

21904

APPROVED BY

MEI

CHECKED BY

HZF


DRAWING BY

CYP

UNLESS OTHERWISE SPECIFIED

TOLERANCES ARE	
X. ± 0.25	X.* $\pm 2^\circ$
.X ± 0.20	.X* $\pm 1.5^\circ$
.XX ± 0.15	.XX* $\pm 1^\circ$
.XXX ± 0.10	.XXX* $\pm 0.5^\circ$

	UNIT
	mm



5°		AO
	NO.	REV.

	NEW RELEASE
/.	REVISIONS

HZF
CHK

07/08/2019
DATE