

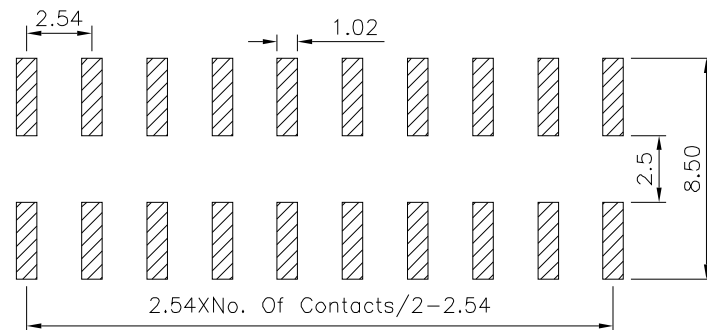



SPECIFICATION

Current Rating: 3A
 Withstand Voltage: 1000V Min. AC/Minute
 Contact Resistance: 20 Milliohms Max.
 Insulation Resistance: 1000 Megaohms Min.
 Operation Temperature: -40°C~+105°C
 Housing: PA6T(UL94V-O),Black
 Contact: Brass,Gold Flash Over Nickel
 RoHS Compliant

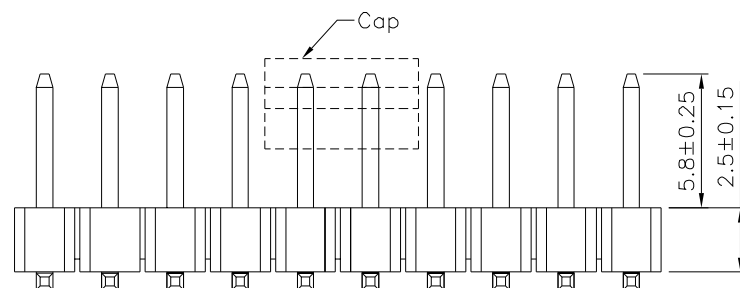

Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

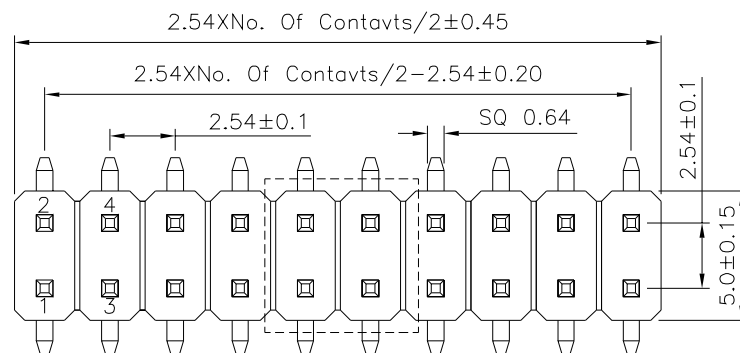

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

21916

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A0

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

X. ±0.25 X.* ±2*
 .X ±0.20 .X* ±1.5*
 .XX ±0.15 .XX* ±1*
 .XXX ±0.10 .XXX* ±0.5*

UNIT mm



NO.

REV.

A0 NEW RELEASE

REVISIONS

CHK

06/21/2021

DATE