
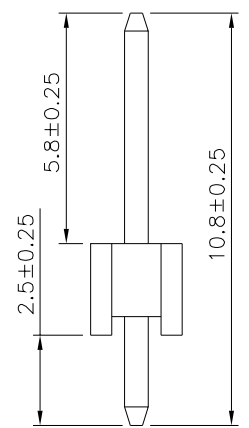
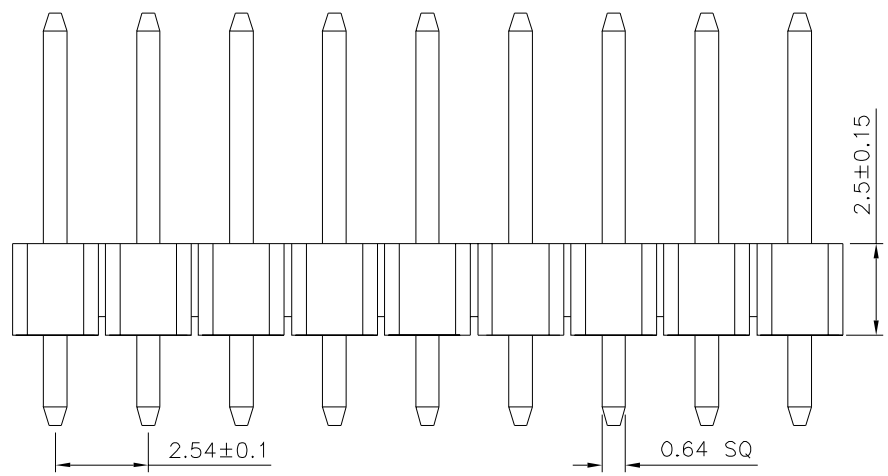


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

SPECIFICATION
 Current Rating:3A
 Withstand Voltage:1000V AC Min./Minute
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megohms Min.
 Operation Temperature:-40°C~+105°C
 Contact:Brass,Gold Flash Over Nickel
 Insulator:PA9T(UL94V-0),Black
 RoHS Compliant

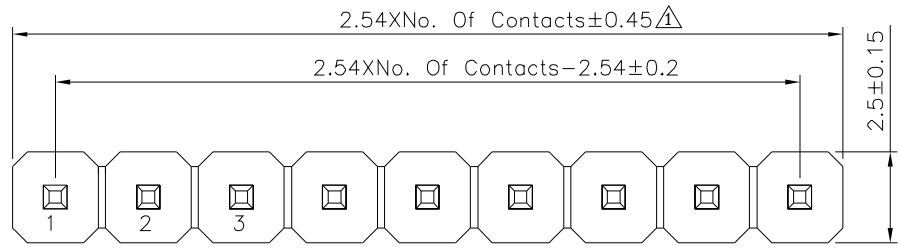

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.		APPROVED BY		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE X. ± 0.25 X.* $\pm 2^\circ$.X ± 0.20 .X* $\pm 1.5^\circ$.XX ± 0.15 .XX* $\pm 1^\circ$.XXX ± 0.10 .XXX* $\pm 0.5^\circ$
21983		EMILY		
		CHECKED BY		
		HZF		
		DRAWING BY		UNIT
		CYP		
SCALE	NONE	REV.	A2	NO. REV.

Δ	A2	Modify Data	HZF	11/15/2023
Δ	A1	Modify Data	HZF	12/02/2021
Δ	A0	NEW RELEASE	HZF	01/04/2015
			CHK	DATE