
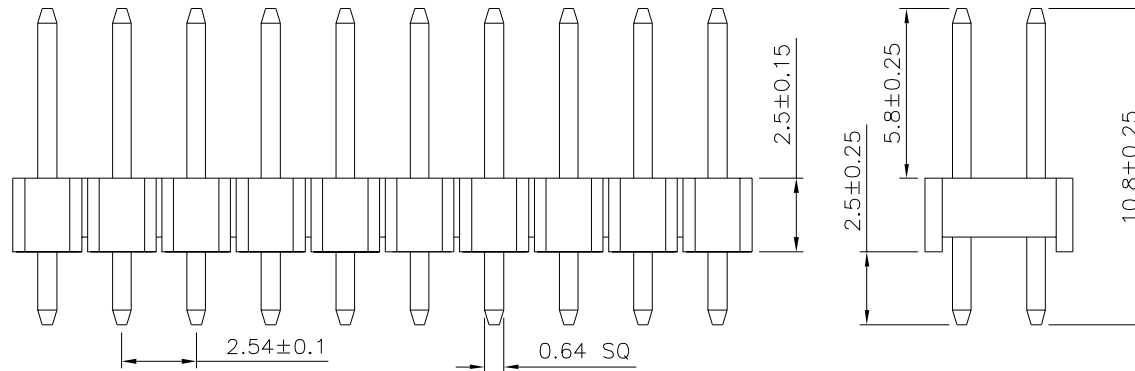


Recommended P.C.B. Layout(Top View)  
(PCB Board Tolerance $\pm 0.05$ )

## SPECIFICATION

Current Rating:3 Amps  
Withstanding Voltage:AC 1000V Min./Minute  
Contact Resistance:20 Milliohms Max.  
Insulation Resistance:1000 Megaohms Min.  
Operation Temperature:-40°C~+105°C  
Contact:Brass,Gold Flash Over Nickel  
Insulator:PA9T(UL94V-0),Black  
RoHS Compliant

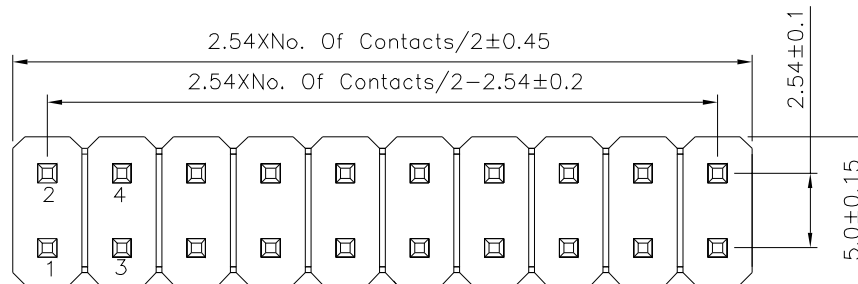

**4U CON** 元化興業股份有限公司  
4U CON TECHNOLOGY INC.

|             |
|-------------|
| DRAWING No. |
|-------------|

21985

|       |      |
|-------|------|
| SCALE | NONE |
|-------|------|

NONE

|             |
|-------------|
| APPROVED BY |
|-------------|

MEI

|            |
|------------|
| CHECKED BY |
|------------|

HZF

DRAWING BY

CYP


REV.

A1

UNLESS OTHERWISE  
SPECIFIED  
TOLERANCES ARE

|      |            |       |                 |
|------|------------|-------|-----------------|
| X.   | $\pm 0.25$ | X.*   | $\pm 2^\circ$   |
| .X   | $\pm 0.20$ | .X*   | $\pm 1.5^\circ$ |
| .XX  | $\pm 0.15$ | .XX*  | $\pm 1^\circ$   |
| .XXX | $\pm 0.10$ | .XXX* | $\pm 0.5^\circ$ |

|  |            |
|--|------------|
|  | UNIT<br>mm |
|--|------------|



|     |      |
|-----|------|
| NO. | REV. |
|-----|------|

REVISIONS

CHK

DATE

|   |    |             |     |            |   |
|---|----|-------------|-----|------------|---|
| 1 | A1 | Modify Data | HZF | 07/24/2023 | A |
|---|----|-------------|-----|------------|---|

|   |    |             |     |            |
|---|----|-------------|-----|------------|
| 0 | AO | NEW RELEASE | HZF | 10/12/2020 |
|---|----|-------------|-----|------------|

| NO. | REV. | REVISIONS | CHK | DATE |
|-----|------|-----------|-----|------|
|-----|------|-----------|-----|------|