


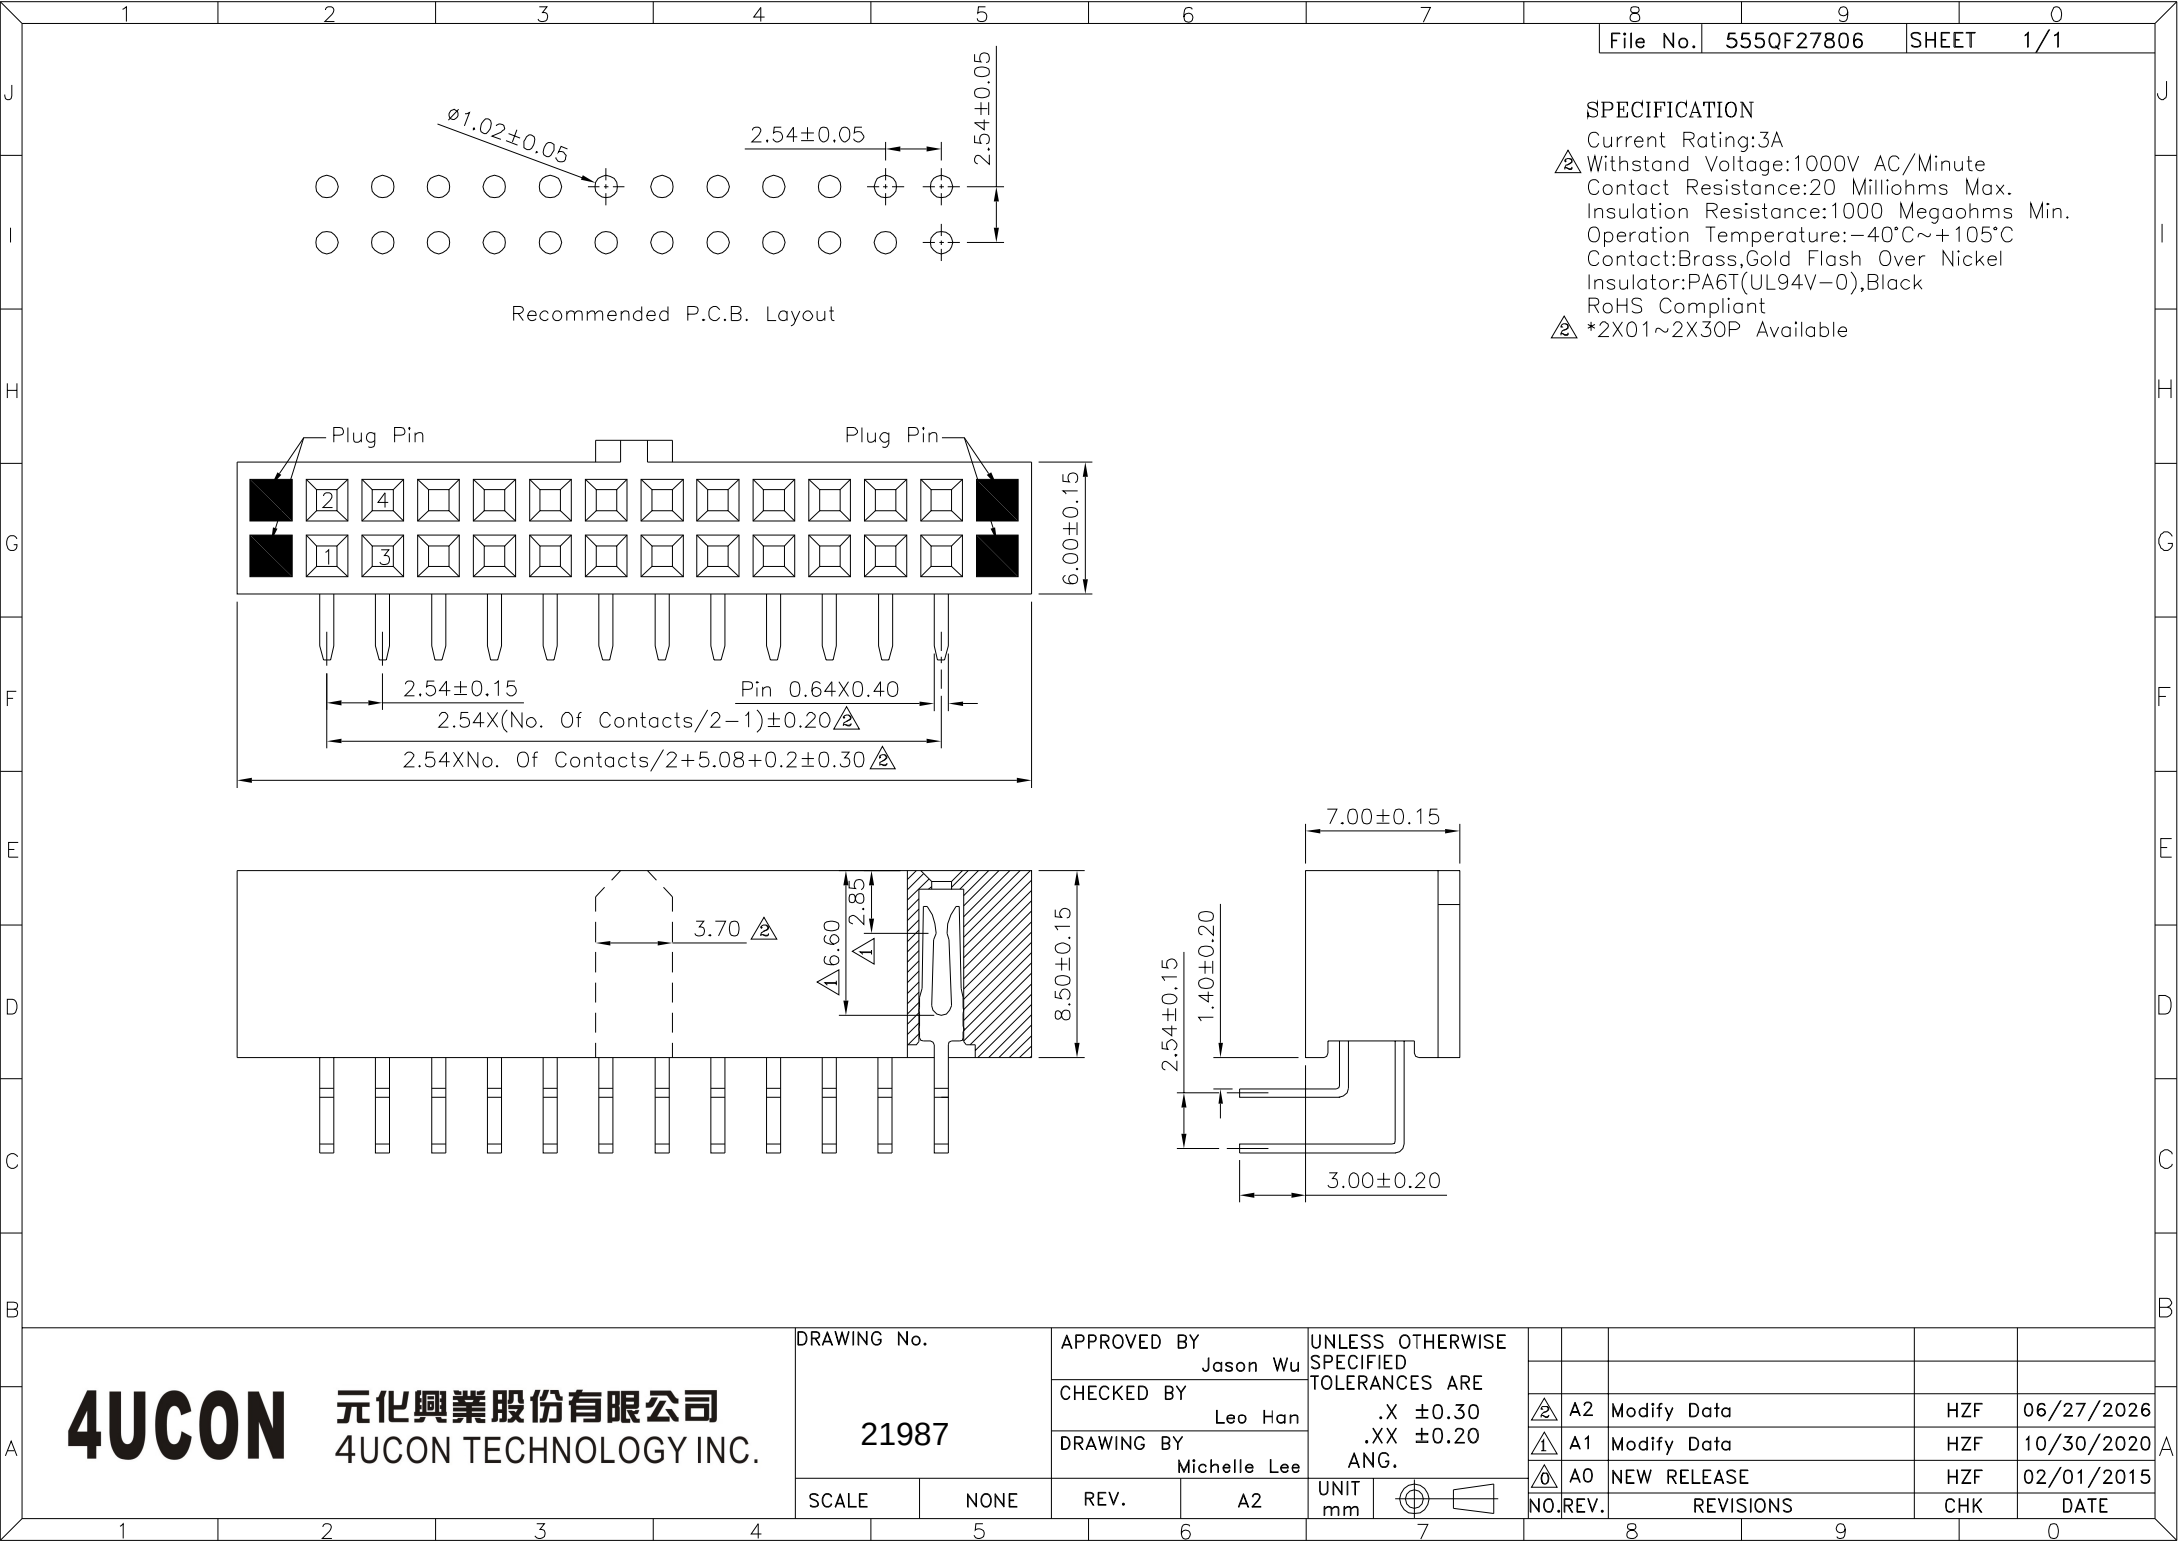

SPECIFICATION
Current Rating:3A
⚠ Withstand Voltage:1000V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T(UL94V-0),Black
RoHS Compliant
⚠ *2X01~2X30P Available

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No. 21987		APPROVED BY Jason Wu		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE .X ±0.30 .XX ±0.20 ANG.					
		CHECKED BY Leo Han							
		DRAWING BY Michelle Lee							
SCALE	NONE	REV.	A2	UNIT mm		NO. REV.	REVISIONS	CHK	DATE
						A2	Modify Data	HZF	06/27/2026
						A1	Modify Data	HZF	10/30/2020
						A0	NEW RELEASE	HZF	02/01/2015