
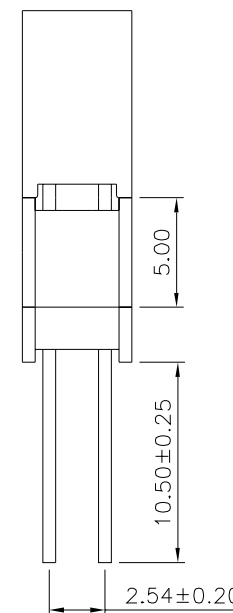
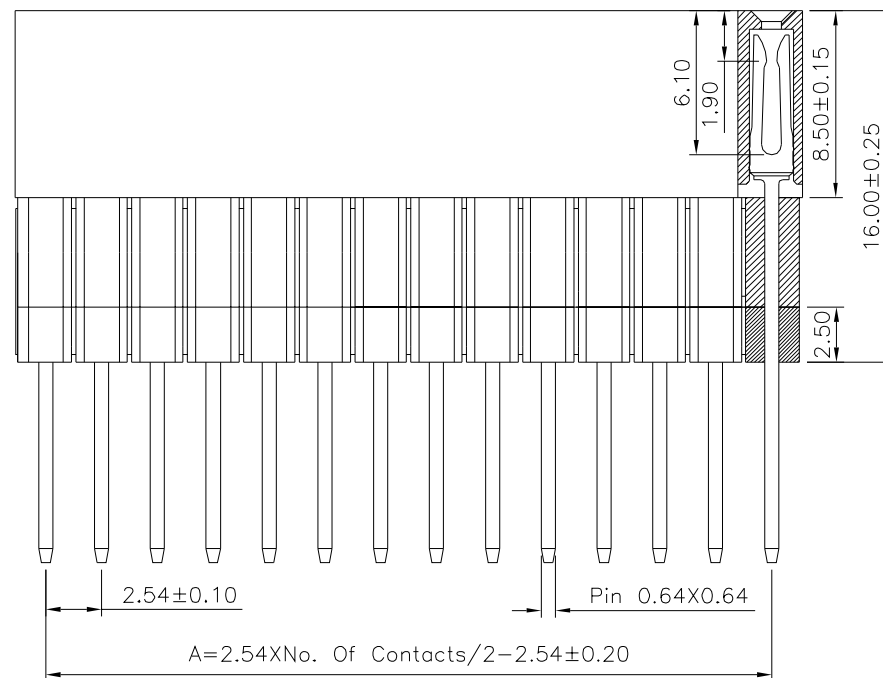


SPECIFICATION

Current Rating:3 Amp
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA6T+30%G.F.(UL94V-0),Black
RoHS Compliant

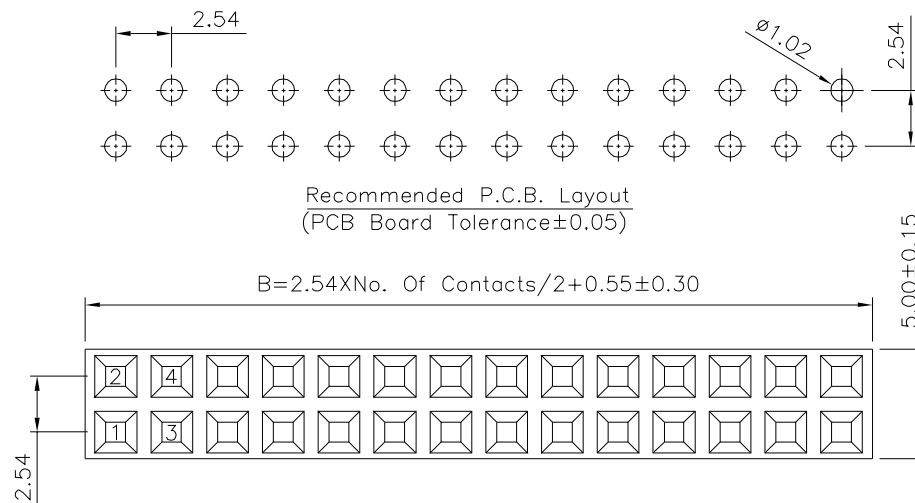

Pin	A	B	Pin	A	B
6	5.08	8.17	44	53.34	56.43
8	7.62	10.71	46	55.88	58.97
10	10.16	13.25	48	58.42	61.5
12	12.70	15.79	50	60.96	64.05
14	15.24	18.33	52	63.50	66.59
16	17.78	20.87	54	66.04	69.13
18	20.32	23.41	56	68.58	71.67
20	22.86	25.95	58	71.12	74.21
22	25.40	28.49	60	73.66	76.75
24	27.94	31.03	62	76.20	79.29
26	30.48	33.57	64	78.74	81.83
28	33.02	36.11	66	81.28	84.37
30	35.56	38.65	68	83.82	86.91
32	38.10	41.19	70	86.36	89.45
34	40.64	43.73	72	88.90	91.99
36	43.18	46.27	74	91.44	94.53
38	45.72	48.81	76	93.98	97.07
40	48.26	51.35	78	96.52	99.61
42	50.80	53.89	80	99.06	102.15

4U CON 元化興業股份有限公司
4U CON TECHNOLOGY INC.

DRAWING No.

22022

SCALE	NONE
-------	------

NONE

APPROVED BY

MEI

CHECKED BY	
------------	--

HZF

DRAWING BY


CYP

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

 $\bar{X} \pm 0.30$

.XX ±0.20

	UNIT mm
--	------------



△	AO
NO.	REV

	NEW RELEASE
--	-------------

REVISIONS

HZF

	06/06/2020
--	------------

NO.	REV
-----	-----

REVISIONS

CHK

DATE
