

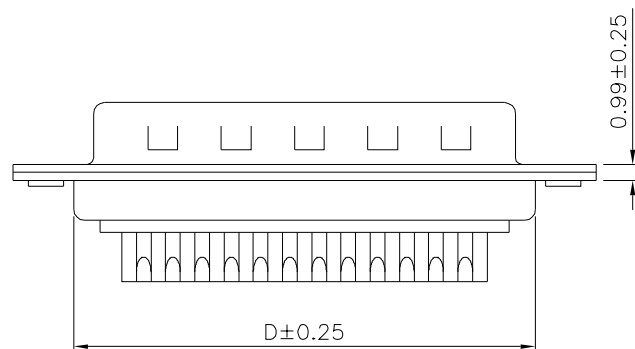


2 1 SPECIFICATION

Signal Contact:5 Amp
 Dielectric Withstanding Voltage:1000V AC Per Minute
 Contact Resistance:10 Milliohms Max.
 Insulation Resistance:5000 Megaohms Min.
 Operating Temperature:-55°C~+125°C
 Insulator:PBT+30%G.F.(UL94V-0),Black
 Contact:Brass,Gold Flash Over All,Over Nickel
 3 Metal Shell:Steel,Tin Plated
 RoHS Compliant

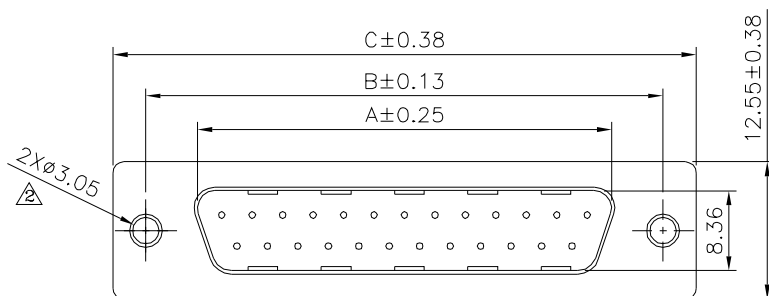

Pin	A	B	C	D
09	16.92	24.99	30.81	19.28
15	25.25	33.32	39.14	27.51
25	38.96	47.04	53.04	41.28
37	55.42	63.50	69.32	57.71

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No. 4 2

22029

APPROVED BY MEI

CHECKED BY HZF

DRAWING BY CYP

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
 .X ±0.3
 .XX ±0.3
 ANG. ±2°



NO.	REV.	REVISIONS	CHK	DATE
4	A4	Modify Data	HZF	02/17/2016
3	A3	Modify Data	HZF	10/16/2013
2	A2	Modify Data	HZF	02/29/2012
1	A1	Modify Data	HZF	07/14/2009
0	A0	NEW RELEASE	HZF	06/09/2008

SCALE	NONE	REV.	A4
-------	------	------	----