
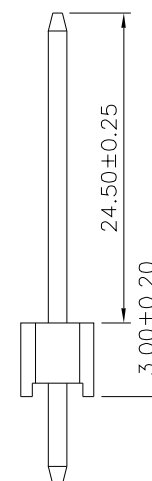


Recommended P.C.B Layout
Tolerance: ± 0.05

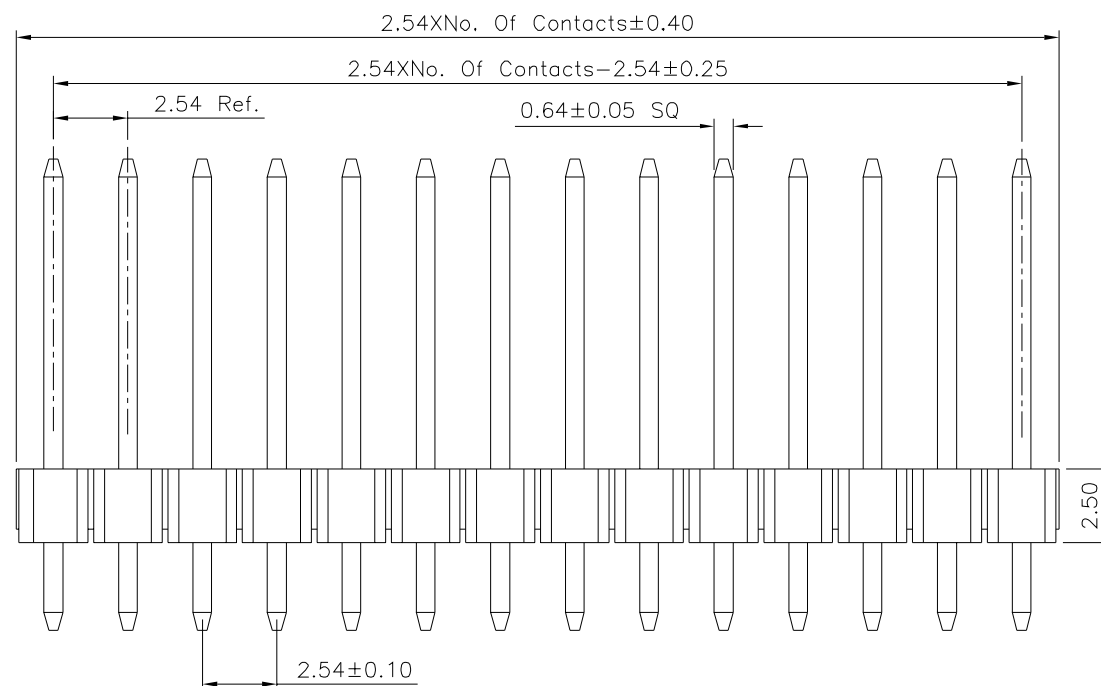

SPECIFICATION

Current Rating: 3.0 Amp/Contact Max.
Withstand Voltage: 1000V AC/Minute
Contact Resistance: 20 Milliohms Max./Contact
Insulation Resistance: 1000 Megaohms Min.
Operation Temperature: $-55^{\circ}\text{C} \sim +105^{\circ}\text{C}$
Contact: Brass, Gold Flash Over Nickel
Insulator: PA6T+30%G.F.(UL94V-0), Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22067

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

GAO

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ± 0.50
.X ± 0.40
.XX ± 0.25
.XXX ± 0.15
ANG. $\pm 5^{\circ}$


SCALE

NONE

REV.

A0

UNIT
mm



NO. REV.

A0 NEW RELEASE

REVISIONS

CHK

DATE

03/03/2021

HZF

03/03/2021

03/03/2021