


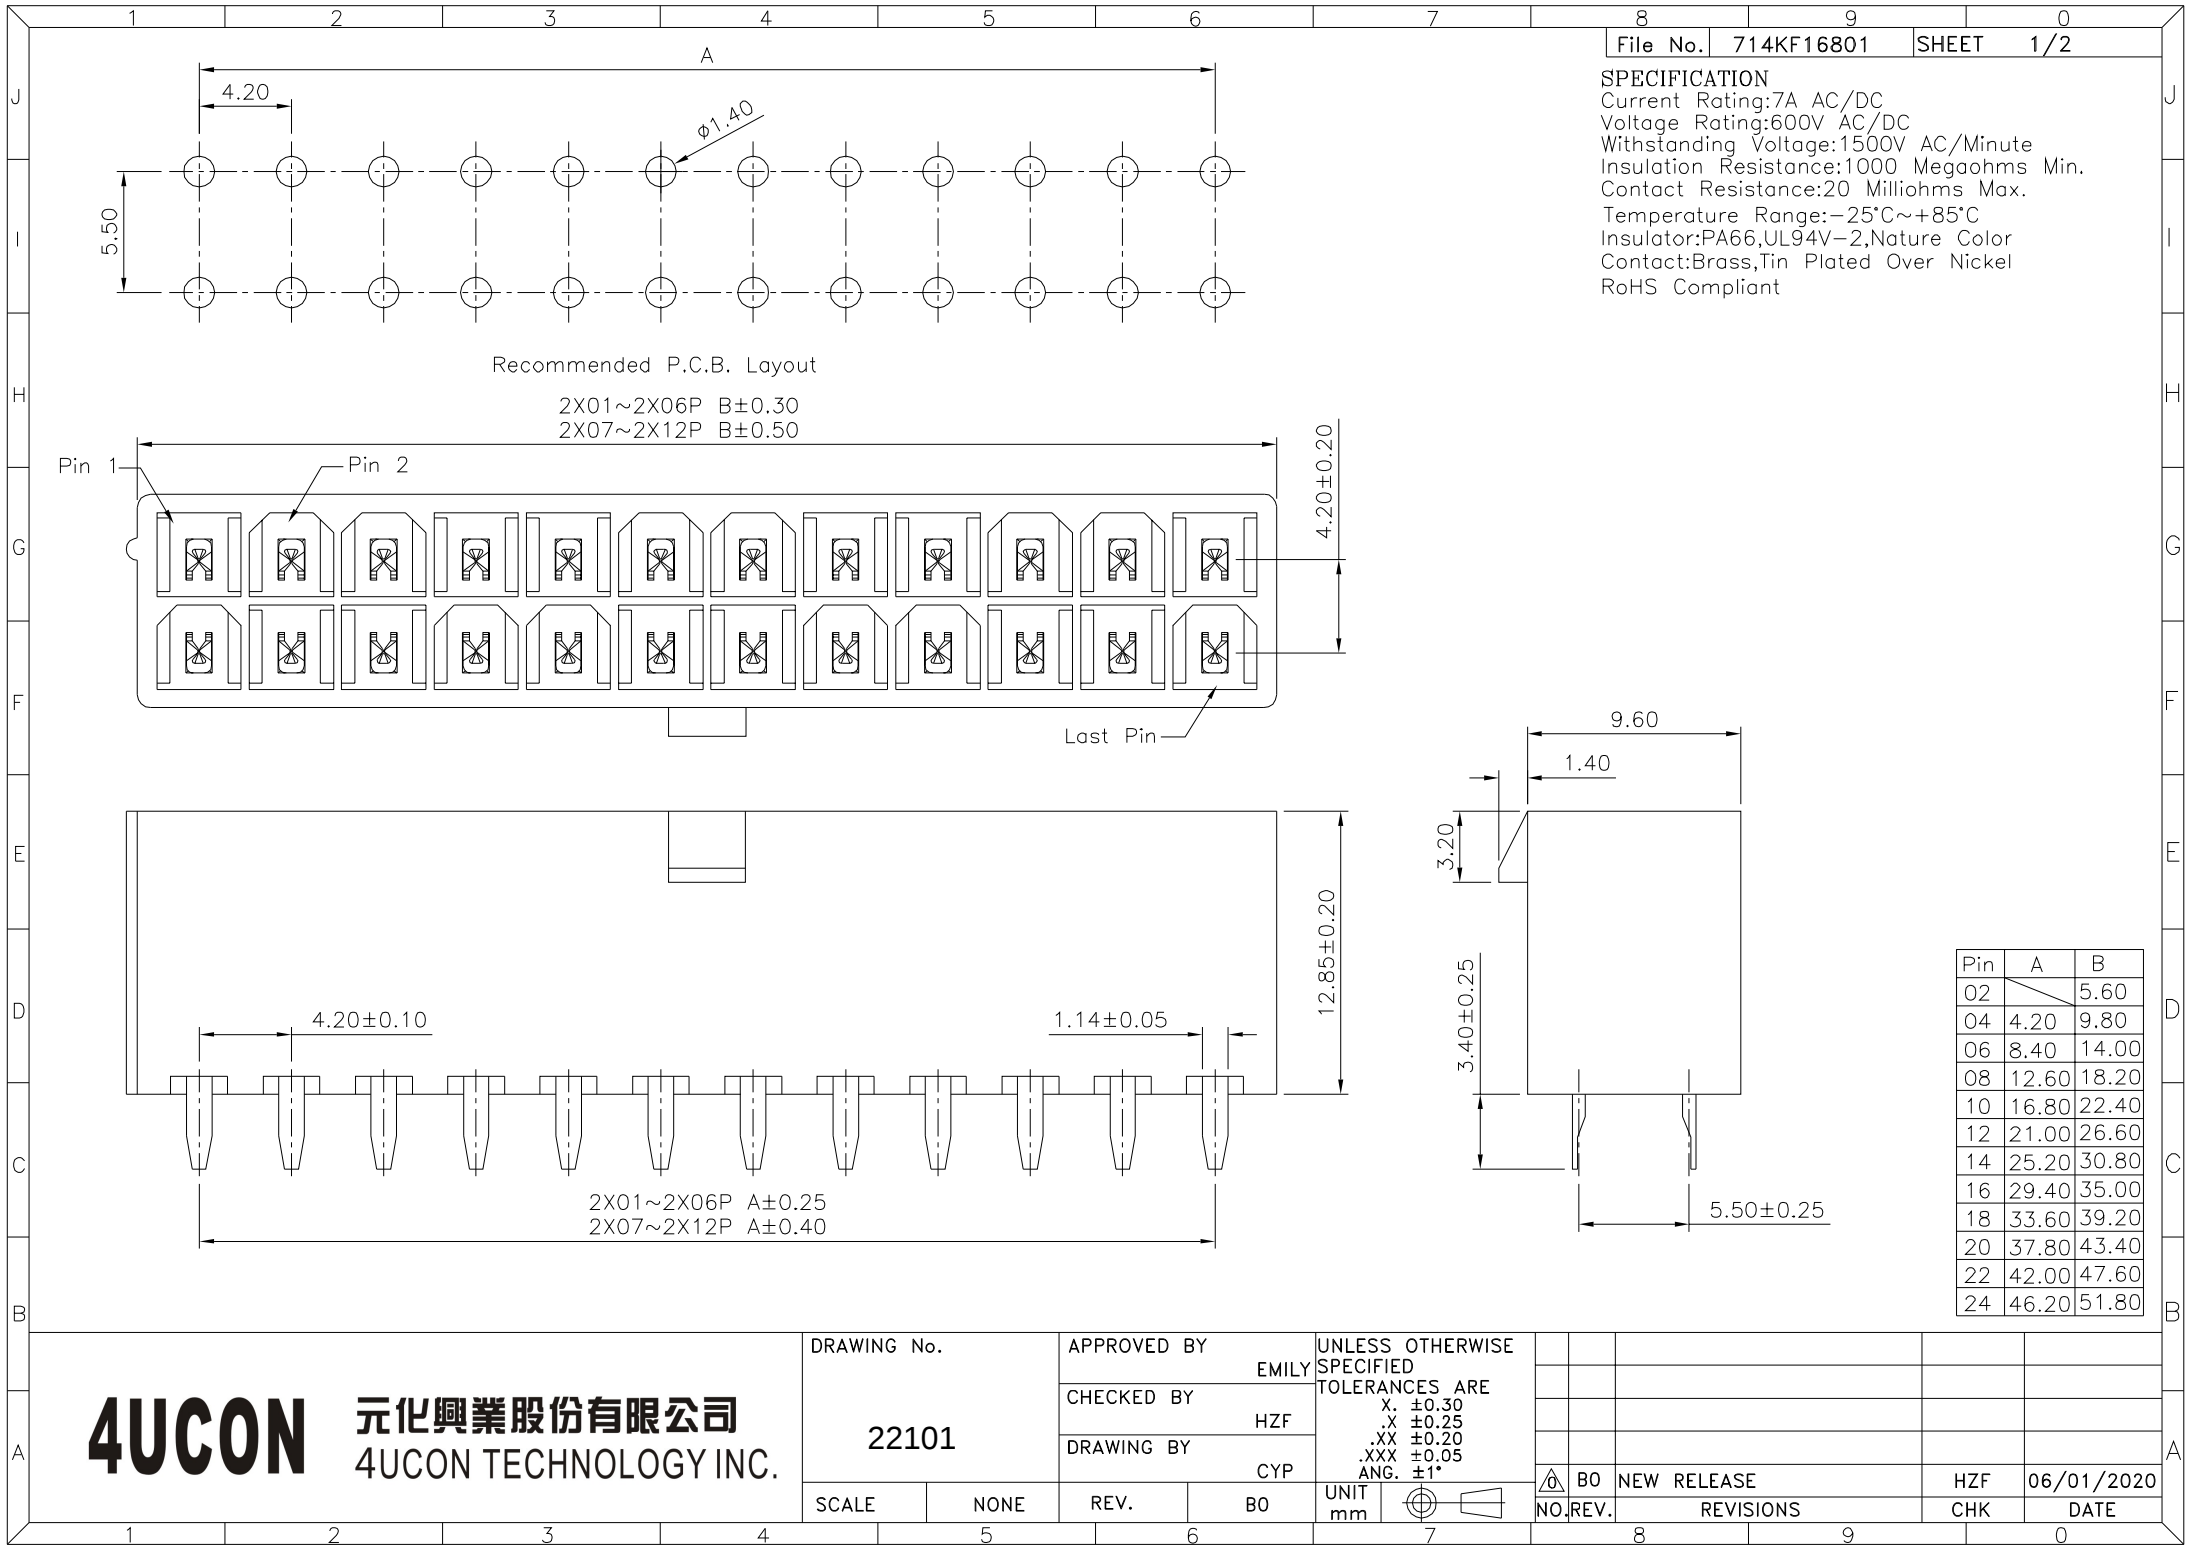

SPECIFICATION
Current Rating:7A AC/DC
Voltage Rating:600V AC/DC
Withstanding Voltage:1500V AC/Minute
Insulation Resistance:1000 Megaohms Min.
Contact Resistance:20 Milliohms Max.
Temperature Range:-25°C~+85°C
Insulator:PA66,UL94V-2,Nature Color
Contact:Brass,Tin Plated Over Nickel
RoHS Compliant

Recommended P.C.B. Layout

2X01~2X06P B±0.30
2X07~2X12P B±0.50

2X01~2X06P A±0.25
2X07~2X12P A±0.40

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22101

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY


CYP

REV.

B0

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
X. ±0.30
.X ±0.25
.XX ±0.20
.XXX ±0.05
ANG. ±1°

UNIT
mm



BO

NEW RELEASE

HZF


06/01/2020

NO. REV.


REVISIONS

CHK


DATE

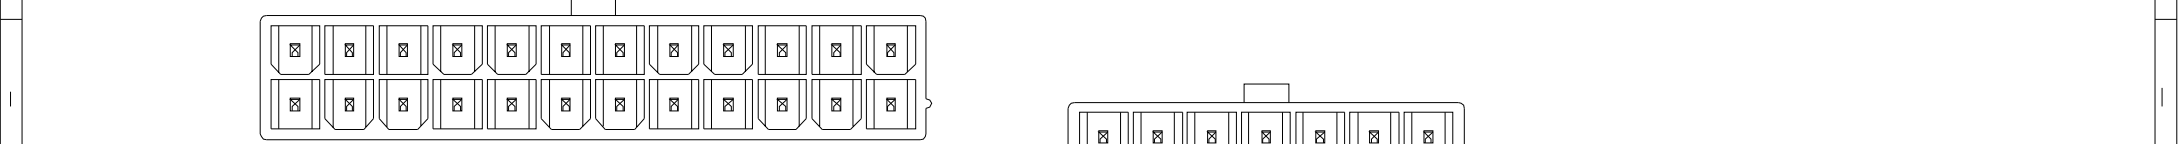

2X12P

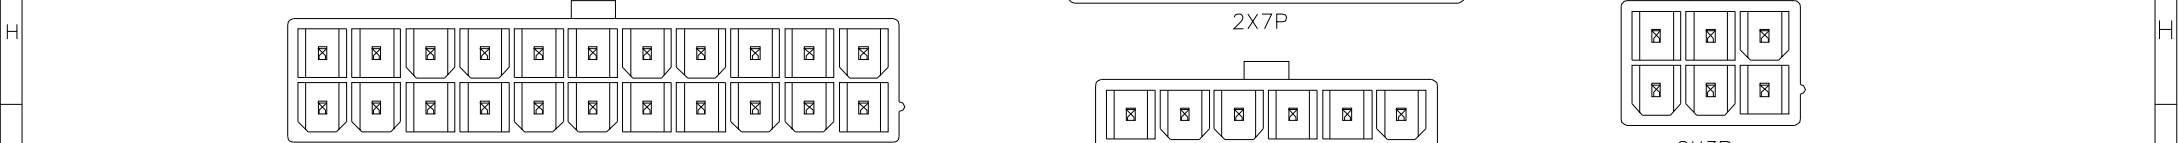

2X11P

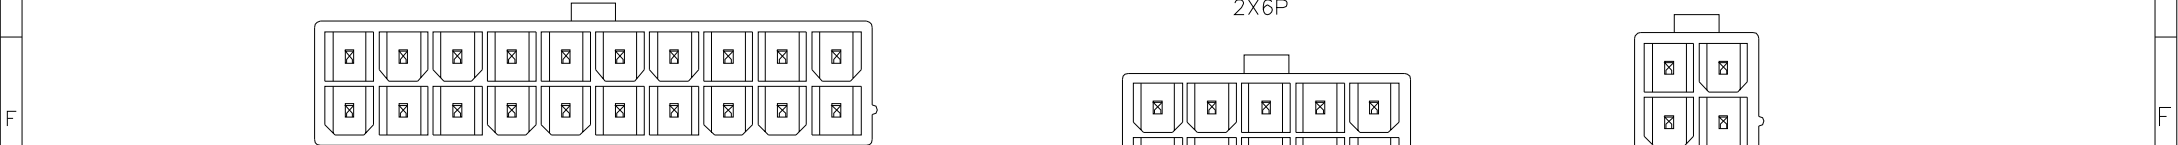




2X10P



2X9P 2X01P



2X7P

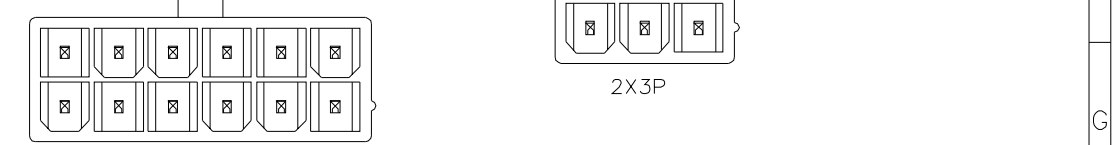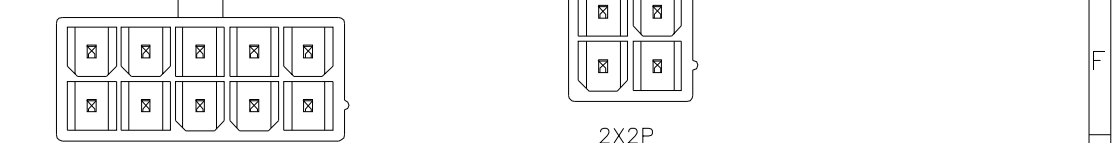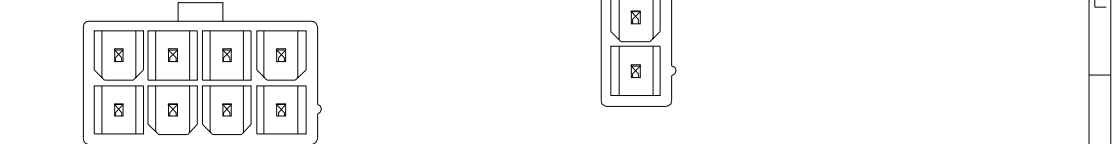[illegible][illegible]

2Y4B



2X3P	
------	--



2X2P	



2X01P

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.	APPROVED BY	UNLESS OTHERWISE					
-------------	-------------	------------------	--	--	--	--	--

APPROVED BY	UNLESS OTHERWISE					
EMILY	SPECIFIED					
	TOLERANCES ARE					

CHECKED BY	TOLERANCES ARE					
	X, ± 0.30					
HZF	.X ± 0.25					
DRAWING BY	.XX ± 0.20					

DRAWING BY	.XX ±0.20 .XXX ±0.05 ANG. ±1°					A
CYP	UNIT	B0	NEW RELEASE	HZF	06/01/2020	

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE					
.X. ± 0.30					
.X ± 0.25					
.XX ± 0.20					
.XXX ± 0.05					
ANG. $\pm 1^\circ$					
UNIT	BO	NEW RELEASE		HZF	06/01/2020

	BO	NEW RELEASE	HZF	06/01/2020
NO	REV.	REVISIONS	CHK	DATE

NEW RELEASE	HZF	06/01/2020
REVISIONS	CHK	DATE

HZF	06/01/2020
CHK	DATE