

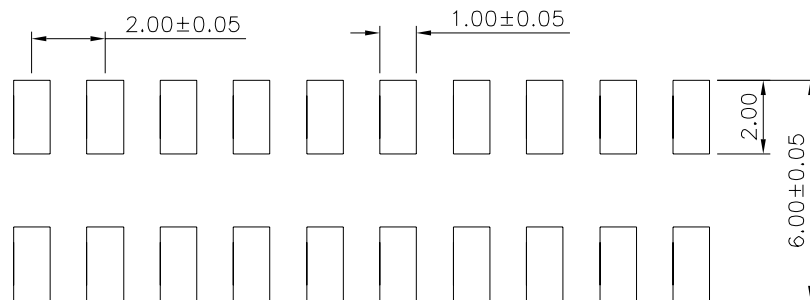


SPECIFICATION

Current Rating:1.5A
Withstand Voltage:500V AC/Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
⚠ Housing:PA6T(UL94V-0),Black
Contact:Brass,Gold Flash Over Nickel
RoHS Compliant

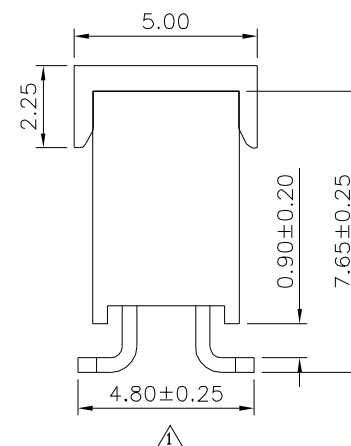

⚠ Recommended P.C.B. Layout

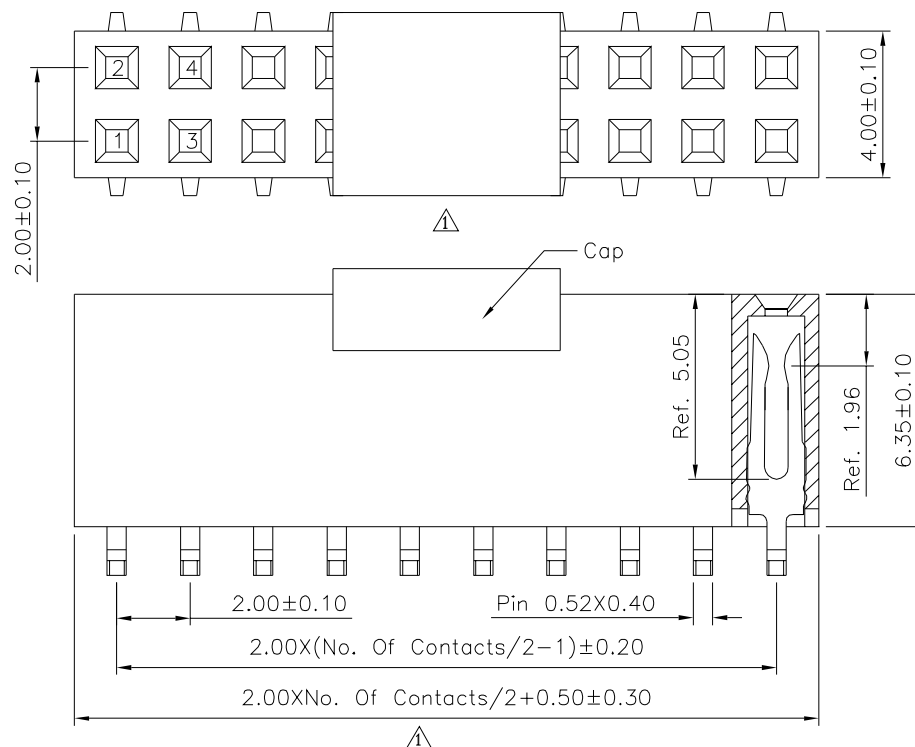

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22132

SCALE

NONE

APPROVED BY

Jason Wu

CHECKED BY

Leo Han

DRAWING BY


Michelle Lee

REV.

A1

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE
.X ±0.30
.XX ±0.20

UNIT
mm



NO.	REV.	REVISIONS	CHK	DATE
⚠ A1	Modify Data	HZF	04/19/2023	
⚠ A0	NEW RELEASE	HZF	01/27/2018	