
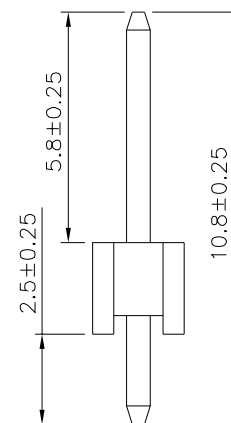
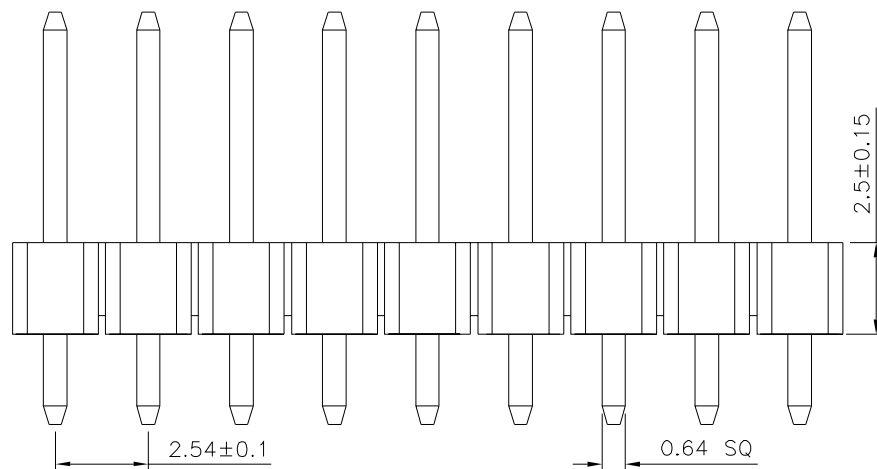


Recommended P.C.B. Layout(Top View)
(PCB Board Tolerance ± 0.05)

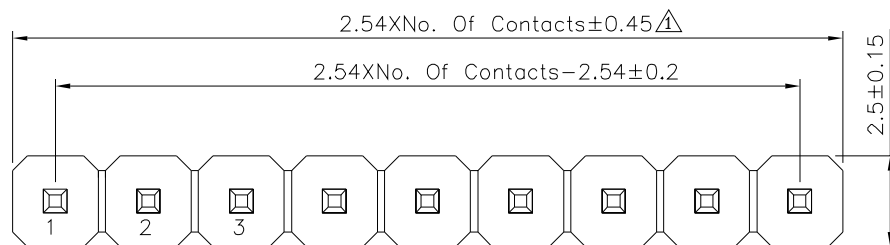

SPECIFICATION
Current Rating:3A
Withstand Voltage:1000V AC Min./Minute
Contact Resistance:20 Milliohms Max.
Insulation Resistance:1000 Megaohms Min.
Operation Temperature:-40°C~+105°C
Contact:Brass,Gold Flash Over Nickel
Insulator:PA9T(UL94V-0),Black
RoHS Compliant

4UCON 元化興業股份有限公司
4UCON TECHNOLOGY INC.

DRAWING No.

22146

SCALE

NONE

APPROVED BY

EMILY

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A2

UNLESS OTHERWISE
SPECIFIED
TOLERANCES ARE

X. ± 0.25 X. $\pm 2^\circ$
.X ± 0.20 .X $\pm 1.5^\circ$
.XX ± 0.15 .XX $\pm 1^\circ$
.XXX ± 0.10 .XXX $\pm 0.5^\circ$

UNIT
mm



5-		A2	Modify Data	HZF 11/15/2023
5-		A1	Modify Data	HZF 12/02/2021
		A0	NEW RELEASE	HZF 01/04/2015
	NO. REV.	REVISIONS		CHK DATE