

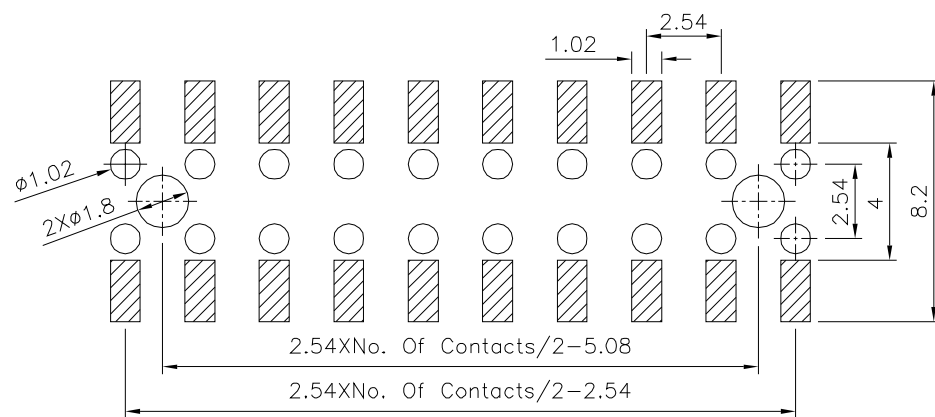
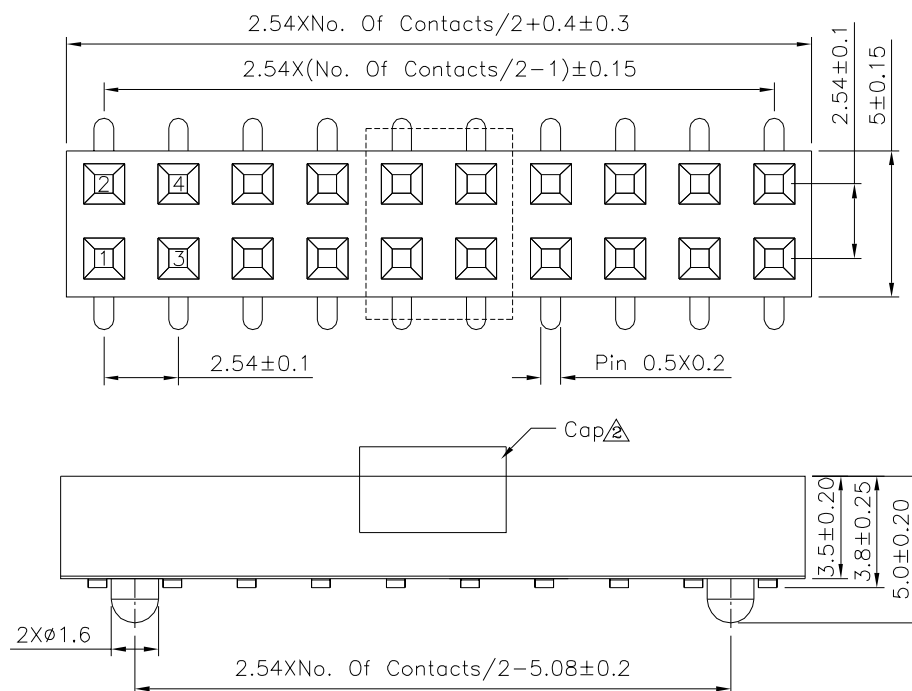


SPECIFICATION

Current Rating:3A
 Withstand Voltage:1000V AC
 Contact Resistance:20 Milliohms Max.
 Insulation Resistance:1000 Megaohms Min.
 Operating Temperature:-40°C~+105°C
 Insulator:PA6T(UL94V-O),Black
 Contact:Phosphor Bronze,Gold Flash Over Nickel
 RoHS Compliant



Recommended P.C.B. Layout(Top View)
 (PCB Board Tolerance±0.05)

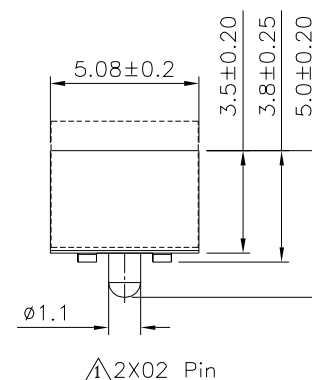

4UCON 元化興業股份有限公司
 4UCON TECHNOLOGY INC.

DRAWING No.

22149

SCALE NONE

APPROVED BY

MEI

CHECKED BY

HZF

DRAWING BY

CYP


REV.

A1

UNLESS OTHERWISE
 SPECIFIED
 TOLERANCES ARE

X. ±0.25 X. ±2"
 .X ±0.20 .X ±1.5"
 .XX ±0.15 .XX ±1"
 .XXX ±0.10 .XXX ±0.5"

UNIT
 mm



NO.	REV.	REVISIONS	CHK	DATE
2	A2	Modify Data	HZF	04/14/2021
1	A1	Modify Data	HZF	08/26/2015
0	A0	NEW RELEASE	HZF	07/02/2014